

Deliverable Identification

Type	Technical Report
Title	Definition of the BITS logatome Corpus for Speech Synthesis
Status	Final
Date	08/05/06
Version	1.7
Number of pages	104
Author	Tania Ellbogen, BITS
Workpackage (WP)/ Task (T) responsible	BITS TP8
Project contact point:	Christoph Draxler LMU, Schellingstr. 3 VG, 80799 München phone: +49 89 2180 2758 e-mail: draxler@phonetik.uni-muenchen.de
Status	Public
Key words	Logatomes, diphones, contents, design, speech synthesis
Abstract	This document provides a specification of the contents of the diphone corpus collected by the BITS project. The corpus comprises the voices of four professional German speakers (two male and two female). It consists of a set of logatome recordings for controlled diphone synthesis.
Status of the abstract	Public

Contents

1. Introduction	3
2. Speaker Profiles	3
3. Contents	3
4. Recording Setup	4
5. Recording Procedure	5
6. Technical Specifications	6
7. Annotation	7
7.1 Phonetic Symbol Set SAMP-PA	7
7.2 Segmentation	10
7.3 Rules for Segmentation	10
8. Parser	11
9. Errors in Logatome List	11
10. Unpronounceable Diphones	12

Appendix

11. Complete List of Logatomes	14
12. Bibliography	104

1. Introduction

This document provides a specification of the diphone corpus collected by the BITS project [1]. It was designed for controlled diphone synthesis for German. For annotation we used an extended German SAM-PA set. Because of the numerous English and French words in German three French and seven English phonemes were included in the corpus. Every diphone is embedded in a logatome and every logatome was read by four professional speakers – two male and two female – with neutral prosody.

All recordings took place in an insulated room with low reverberation. The speech signals were recorded directly to hard disk using the multi-channel recording software SpeechRecorder [3]. The signals were recorded on three channels: close talk microphone, large membrane condenser microphone and laryngograph signal.

2. Speaker Profiles

The database contains recordings of four speakers. All four speakers and their parents have German mother tongue (L1) and all speakers have foreign language competence (L2) in at least two other languages. All speakers are professional speakers and they are long-term residents of Bavaria, Germany.

	<i>Spk1</i>	<i>Spk2</i>	<i>Spk3</i>	<i>Spk4</i>
sex	f	f	m	m
age	47	55	40	38
smoker	+	+	+	-
L2	E, F	E, I, GR	E, F	E, I
years of training	1	4	3	3
profession	Radio announcer	speaker	Radio announcer	actor

3. Contents

As the corpus was designed for controlled diphone synthesis we constructed a list of logatomes that each contained one diphone. The corpus consists of 2795 diphones that are embedded in an articulatory neutral context: /a/ or /@/ for consonants, /t/ or /d/ for vowels. The diphones are embedded in logatomes of four or five syllables so that the diphone is part of the second or third syllable. The logatomes all end on /-aU/, /-OY/, /-aI/

and are read in a monotonous manner with stress mainly on the last syllable (e.g. “patuckadau”). Where the diphone consists of end-phoneme and pause the first vowel of the logatome is stressed.

We constructed a list of logatomes so that every single phoneme was combined with every other. Then we used a set of well known phonological rules to exclude impossible combinations. The rules are as follows:

- no combination of equal phonemes – with or without elongation. Exception: English and French versions were combined with their German counterparts
- /x/ can only be preceded by back vowels
- no vowels in front of diphthongs
- /N/ cannot occur at the beginning of a syllable
- /N/ cannot be preceded by consonants
- /h/ cannot be the last phoneme of a syllable or preceded a consonant
- /@/ and /6/ can be combined with every phoneme (except themselves).

There were still many diphone combinations left that seemed very unlikely. But since no reliable rule could be found that guaranteed that all possible diphone combinations in German were created and all others were excluded, we went the other way, i.e. all diphone combinations were kept in the set that can be produced by a trained speaker; even if there is a high probability they are actually never needed in daily speech. The same applies to combinations with English or French phonemes. We preferred to have too many diphones rather than too few. Also there is the possibility that such combinations may not be allowed inside words, but may occur at word boundaries.

4. Recording Setup

All recordings took place in the studio of the IPSK of the LMU in Munich. The speakers were seated in an insulated room (studio box; type “professional”) with low reverberation (see *fig 1*) [2]. The room is acoustically decoupled from the rest of the building to dampen the background noise. The general speaking direction of the speaker is at a light angle to the front window surface to prevent direct echoes. The speaker was told to adopt a comfortable position and not to move during recordings if possible. He is given a beverage and is reminded to ask for a break whenever he (or she) needs to.

The positions of the chair and room microphone are marked on the floor. Furthermore the angle of the rack of the microphone to the wall was noted. In this way it should be guaranteed that speaker and equipment have the same position throughout all sessions. If the speaker declares himself indisposed before the recording (e.g. because he has a cold), the recording session is canceled.

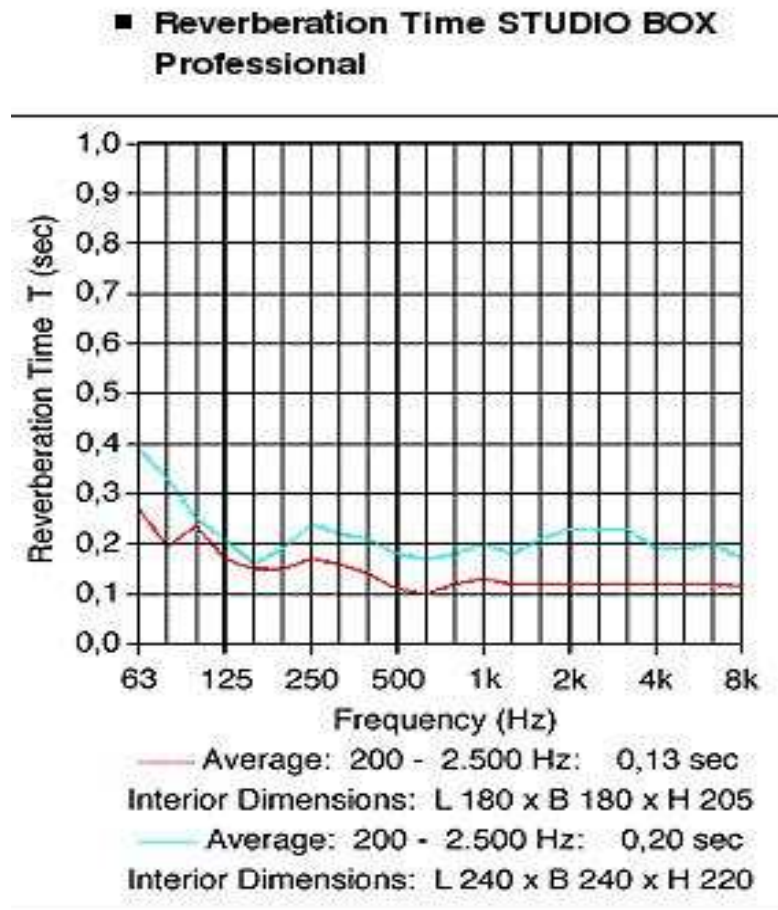


Fig. 1: reverberation time for Studio Box “professional”

The speakers were told to read the logatomes in a monotonous manner but at the same time fluently and as naturally as possible, i.e. in normal speaking rate and not overarticulated.

5. Recording procedure

The recordings were made between 10.30 a.m. and 14 p.m. because professional speakers are unanimous that the voice needs some wake time to sound at its best. Also the recordings should not be made too late to avoid that the voice sounds tired. The recording sessions lasted each one hour, in the first 30 minutes logatomes were recorded. In the second 30 minutes we recorded sentences. In the picture you can see the placement of the microphones and electrodes in the recording cabin.



Before each recording session the placements of microphones and the laryngograph electrodes are checked and the sound signals and the laryngograph signals are monitored on an oscillograph. A check list is run over all settings of the sound mixer and the PC software.

During the session the speech prompts are displayed through a window on a screen outside of the recording room using the program SpeechRecorder [3]. Three supervisors outside the recording room monitor the recording: a controller provides the prompts and listens for technical noises, one person pays attention to the correct speaker intonation and one person is responsible that the pronunciation uttered by the speaker is exactly according to the desired specification of the prompt. The recording of a prompt is repeated until all three supervisors give their consent.

6. Technical Specifications

The speech signals were recorded with a sampling rate of 48 kHz, 16 bit via a Yamaha O2R digital sound mixer directly to hard disc using the multi-channel recording software SpeechRecorder [3]:

- sound card: 'Delta TDIF' from M-Audio.
- Channel 0: close talk microphone (Beyerdynamic NEM 192) positioned 7cm to the right of the mid-sagittal plane at the height of the upper lip.
- Channel 1: laryngograph signal (LaryngoGraph PCLX)
- Channel 2: large membrane condenser microphone (Neumann Type TLM 103) 60cm from the mouth.

The channels are separated into standard WAV format files; no further processing was performed to avoid any undesired degradation of the signals.

7. Annotation

7.1 Phonetic Symbol Set SAMP-PA

For annotation we used an extended German SAM-PA list that included the following symbols (the list is taken from the specification of <http://www.phon.ucl.ac.uk/home/sampa/german.htm>):

SAM-PA-symbol	Word	Transcription
vowels:		
I	Sitz	zIts
E	Gesetz	g@zEts
a	Satz	zats
O	Trotz	tROts
U	Schutz	SUts
Y	hübsch	hYpS
9	plötzlich	pl9tsIIC
i:	Lied	li:t
e:	Beet	be:t
E:	spät	SpE:t
a:	Tat	ta:t
o:	rot	Ro:t
u:	Blut	blu:t
y:	süß	zy:s
2:	blöd	bl2:t
diphthongs:		
aI	Eis	aIs
aU	Haus	haUs
OY	Kreuz	kROYts
unstressed „schwa“ vowels:		
@	bitte	bIt@
6	besser	bEs6

SAM-PA-symbol	Word	Transcription
glottal stop:		
Q (non-standard SAM-PA)	Verein	fE6QaIn
plosives:		
p	Pein	paIn
b	Bein	baIn
t	Teich	taIC
d	Deich	daIC
k	Kunst	kUnst
g	Gunst	Gunst
fricatives:		
f	fast	fast
v	was	vas
s	Tasse	tas@
z	Hase	ha:z@
S	waschen	vaS@n
Z	Genie	Ze:ni:
C	sicher	zIC6
j	Jahr	ja:6
x	Buch	bu:x
h	Hand	hant
sonorants:		
m	mein	maIn
n	nein	naIn
N	Ding	dIN
l	Leim	laIm
R	Reim	RaIm

SAM-PA-symbol	Word	Transcription
affricates:		
pf	Pfahl	pfa:l
ts	Zahl	tSa:l
tS	deutsch	dOYtS
additional english phonemes:		
EI	raise	rEIz
@U	nose	n@Uz
T	thin	TIn
D	this	DIs
r	wrong	rON
L	long	LON
w	wasp	wOsp
additional french phonemes:		
E~	vin	vE~
a~	vent	va~
o~	bon	Bo~
6-phoneme combinations:		
6	besser	bEs6
i:6	Tier	ti:6
I6	Wirt	vI6t
y:6	Tür	ty:6
Y6	Türke	TY6k@
e:6	schwer	Sve:6
E6	Berg	bE6k
E:6	Bär	bE:6
2:6	Föhr	f2:6
96	Wörter	v96t6
a:6	Haar	ha:6
a6	hart	ha6t

SAM-PA-symbol	Word	Transcription
u:6	Kur	ku:6
U6	kurz	kU6ts
o:6	Ohr	o:6
O6	dort	dO6t
additional characters:		
<p:>	<i>marks the pseudo-segment preceding and trailing the diphone. This labeling is optional</i>	

7.2 Segmentation

The program PRAAT [4] is used for the segmentation and labeling of the logatomes. For the phonetic annotation all logatomes were segmented in a first pass with MAUS [5] into German SAM-PA. MAUS automatically produces phoneme segmentations for words or whole sentences either by forcing the labelling to follow the canonical pronunciation (forced alignment) or by using a stochastic model of possible pronunciations to a given utterance and then produce the most likely pronunciations of the recording (in the following referred to as “MAUS version”).

The logatomes are pre-segmented according to their canonical form. This guarantees that the logatome contains the diphone in correct SAM-PA transcription which may not be the case in the MAUS version. Since we are not interested in the remainder of the logatome, we automatically present only three to five boundaries, depending on whether a plosive is concerned or not. The remainder of the logatome is not segmented but is included in two pseudo-segment (<p:> or empty) preceding and trailing the diphone.

Plosives are split into two phases: silence and burst. For this reason plosives have one boundary in addition to the other phonemes. The boundaries mark the beginning of the diphone, the border between the two phonemes and end of the diphone.

In a second pass a group of ten to twelve trained phoneticians manually correct the pre-segmented logatomes.

After that five to six phoneticians that are consistent to each other correct the segmentations in a third pass. In a last step all segmentations are reviewed by the team supervisor.

7.3 Rules for segmentation

To provide a highly consistent phonetic annotation we use the following rules:

- the placing of boundaries is primarily based on the auditory judgment,

- the boundaries of segments are always placed at positive zero-crossings of the oscillogram,
- the placement of the boundaries should be controlled by sonagram and oscillogram,
- in transitions in which both of two adjacent phonemes can be heard, the boundary is placed in the middle of this transition (50% rule),
- voiced (periodic) elements start with the first clearly identifiable glottal pulse,
- the boundaries of segments with low intensity (e.g. /h/, aspiration) are set where the signal can be clearly distinguished from the background noise. Noises of breathing – if clearly recognized – have to be cut off from the friction or aspiration,
- a lip smack within the target diphone of a logatome is not accepted. The logatome has to be recorded again.

The complete conventions for segmentation in the BITS project can be found in:
 DOC/HTML/Conventions_for_segmentation_8_5e.pdf

8. Parser

A parser was written to perform a syntactic consistency check of the segmentation. The parser is written in perl. The code is given in the appendix. Following rules apply for the files:

- Unknown or not permitted SAM-PA codes other than the following are found:
 (,), +, <p:>, <br:>, t_s, b_s, p_s, d_s, g_s, k_s, pf_s, ts_s, tS_s, Q_s, t_b, b_b, p_b, d_b, g_b, k_b, pf_b, ts_b, tS_b, Q_b, a~, o~, a, a:, aU, 2:, aI, 9, e:, E:, E, E~, o:, O, OY, Y, y:, U, u:, EI, @U, i:, I, i:6, I6, y:6, Y6, e:6, E6, E:6, 2:6, 96, a:6, a6, u:6, U6, o:6, O6, @, 6, Z, p, b, t, d, k, g, pf, ts, Q, tS, f, v, s, z, S, Z, C, j, x, h, m, n, N, l, R, T, D, r, L, w, q, §,*,
- Plosives and affricates have both a silent and a burst phase (except the glottal stop Q which may have only one segment):
 t_s, b_s, p_s, d_s, g_s, k_s, pf_s, ts_s, tS_s, Q_s, t_b, b_b, p_b, d_b, g_b, k_b, pf_b, ts_b, tS_b, Q_b.
- Each diphone begins and ends with a pause (<p:>).
- The the diphone labels correspond exactly to the intended diphone of this recording.

9. Error in Logatome List

The diphone /tst/ was recorded twice in the logatomes No. 127 and 2792.

10. Unpronounceable Diphones

The following logatomes were originally included in the recording list, but found unpronounceable later and are thus not contained in the corpus.

The orthography for the three French phonemes a~, E~ and o~ is Ã, È and Õ respectively. This orthography does not exist but we used these signs to indicate to the speakers that they should pronounce the nasalised French vowels.

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
66	PATATTSCHADAU	patattSadaU	ttS	
128	PATATTSADAU	patattsadaU	tts	
132	ATAHNGADEU	QatahNadOY	hN	
210	ATAHWADAI	QatahvadaI	hv	
380	ATACHADAI	QatahCadaI	hC	
522	APAKGADAU	QapakgadaU	kg	
601	ATARNGADEU	QataRNadOY	RN	
618	ATAHJADEU	QatahjadOY	hj	
621	ATADTADAI	QatadtadaI	dt	
768	ATATDADAI	Qata:tdadaI	td	
893	PATAPFFADAU	patapffadaU	pff	
970	ATATSCHSCHADAI	QatatSSadaI	tSS	
975	ATATZSADAI	QatatssadaI	tss	
1040	PATAHTSCHADAU	patahtSadaU	htS	
1116	ATAH ADAI	QatahQadaI	hQ	
1165	APADTSADAU	QapadtsadaU	dts	
1235	ATAHLADEU	QatahladOY	hl	
1270	ATABPFADAU	QatabpfadaU	bpf	
1284	ATAHNADEU	QatahnadOY	hn	
1354	ATASCHNGADEU	QataZNadOY	ZN	
1519	PATAGKADAU	patagkadaU	gk	
1549	ATABPADAI	QatabpadaI	bp	
1595	APADTSCHADAU	QapadtSadaU	dtS	
1681	ATACHNGADEU	QataxNadOY	xN	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
1745	APBADAI	Qapba:daI	pb	
1848	ATAHWADAI	QatahwadaI	hw	ENG
1975	OUTATADAI	@UtatadaI	*@U	ENG
2053	ATARNGADEU	QatarNadOY	rN	ENG
2127	ATALNGADEU	QataLNadOY	LN	ENG
2228	ATALLADEU	QatalLadOY	IL	ENG
2339	EITATADAI	EItatadaI	*EI	ENG
2451	ATAWNGADEU	QatawNadOY	wN	ENG
2620	ÕDATADEU	o~datadOY	*o~	FR
2642	ËDATADEU	E~datadOY	*E~	FR
2671	ÃDATADEU	a~datadOY	*a~	FR

Appendix

11. Complete List of Logatomes

The orthography for the three French phonemes a~, E~ and o~ is Ã, Ë and Õ respectively. This orthography does not exist but we used these signs to indicate to the speakers that they should pronounce the nasalised French vowels.

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
1	DATOOUHTADEU	dato:u:tadOY	o:u:	
2	ATASÖTTADAU	Qataz9tadaU	z9	
3	DATASCHAHTADEU	dataZa:tadOY	Za:	
4	ATATAITADEU	QatataItadOY	taI	
5	DATAFÜHTADEU	da:tafy:tadOY	fy:	
6	PATÄPFADAU	patEpfa:daU	Epf	
7	PATASCHPFADAU	pataSpfa:daU	Spf	
8	ATATZETADEU	Qatats@tadOY	ts@	
9	ATÄÖTTADAU	QatEOtadaU	EO	
10	ATASÄTTADAU	QatazEtadaU	zE	
11	DATAFAHTADEU	da:tafa:tadOY	fa:	
12	PATAFKADAU	patafkadaU	fk	
13	ADOPPADAU	QadOpadaI	Op	
14	PATANGGADAU	pataNgadaU	Ng	
15	ATABATTADAU	QatabatadaU	ba	
16	PATACHTSCHADAU	pataxtSa:daU	xtS	
17	ADUH ADAU	Qadu:QadaI	u:Q	
18	ATTECHAUTADEU	QatECaUtadOY	CaU	
19	ATAMÖTTADAU	Qatam9tadaU	m9	
20	ATAIATTADAU	QataIatadaU	aIa	
21	ATASCHEITADEU	QataZaItadOY	ZaI	
22	ATABBERTADEU	Qatab6tadOY	b6	
23	ATAÖTTADAU	Qata9tadaU	a9	
24	ATATSADAU	Qatat sadaI	ts	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
25	ATÖRRADEU	Qat9RadOY	9R	
26	ATÜÖTTADAU	QatY9tadaU	Y9	
27	ATTÖEDADEU	Qat9@da:daU	9@	
28	DATTERUHTADEU	dat6u:tadOY	6u:	
29	ATARSCHADAI	QataRSadaI	RS	
30	DATACHUHTADEU	da:taxu:tadOY	xu:	
31	ATANATTADAU	QatanatadaU	na	
32	PATEUPFADAU	patOYpfa:daU	OYpf	
33	DATAFIEHTADEU	da:tafi:tadOY	fi:	
34	ATASCH ADAI	QataSQadaI	SQ	
35	DATATZIEHTADEU	datatsi:tadOY	tsi:	
36	ATASATTADAU	QatasatadaU	sa	
37	PATAUKADAU	pataUkadaU	aUk	
38	ATAMÄTTADAU	QatamEtadaU	mE	
39	ATATSCHDADAI	QatatSdadaI	tSd	
40	ADAHSADAI	Qada:sadaI	a:s	
41	ATAFCHADEU	QatafxadOY	fx	
42	DATAUÄHTADEU	da:taUE:tadOY	aUE:	
43	ATANGPADAI	QataNpadaI	Np	
44	DATADEHTADEU	da:tade:tadOY	de:	
45	ATAPÄTTADAU	QatapEtadaU	pE	
46	PATÜCKADAU	patYkadaU	Yk	
47	ATANGTADAI	QataNtadaI	Nt	
48	ATTERDADAI	Qat6dadaI	6d	
49	ATUITTADAU	Qatu:ItadaU	u:I	
50	ATTE ADAI	Qat@QadaI	@Q	
51	ADAUBADAI	QadaUba:daI	aUb	
52	ADÄHPADAI	QadE:padaI	E:p	
53	ADÖWWADAI	Qad9vadaI	9v	
54	ADEUSCHADAI	QadOYSa:daI	OYS	
55	ATAHERTADEU	Qatah6tadOY	h6	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
56	ADEETADEI	Qade:tadaI	e:t	
57	ATASCHCHADAI	QataZxadaI	Zx	
58	ATUATTADAU	Qatu:atadaU	u:a	
59	ATATZSCHADAI	QatatsSa:daI	tsS	
60	ATTECHTADAI	QatECtadaI	Ct	
61	DATEUÖHTADEU	da:tOY2:tadOY	OY2:	
62	ATUÄTTADAU	Qatu:EtadaU	u:E	
63	ATACHATTADAU	QataxatadaU	xa	
64	ATEECHADEU	Qa:te:CadOY	e:C	
65	DATASCHUHTADEU	dataZu:tadOY	Zu:	
66	PATATTSCHADAU	patattSadaU	ttS	
67	ADAIWADEU	QadaIva:daU	aIv	
68	ATAWRADEU	QatavRadOY	vR	
69	ATADITTADAU	QatadItadaU	dI	
70	ADACHADAI	QadaxadaI	ax	
71	DATUÄHTADEU	datu:E:tadOY	u:E:	
72	ATATSCHHADEU	QatatShadOY	tSh	
73	ATTECHBADAI	QatECba:daI	Cb	
74	ATASCHETADEU	QataZ@tadOY	Z@	
75	TADISSADAI	ta:dIsadaI	*t	
76	ATAFNADEU	QatafnadOY	fn	
77	ATANSADAI	QatansadaI	ns	
78	ATAIEDADEU	QataI@da:daU	aI@	
79	ATAJADEU	Qataja:daU	aj	
80	ATASRADEU	QatazRadOY	zR	
81	ATAGUTTADAU	Qata:gUtadaU	gU	
82	DATATOHTADEU	datato:tadOY	to:	
83	ATIMMADEU	QatIma:daU	Im	
84	ATAITTADAU	Qata ItadaU	aI	
85	ADAISCHADEU	QadaIZadOY	aIZ	
86	ATAPFÖTTADAU	Qatapf9tadaU	pf9	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
87	ATAMSADAI	QatamsadaI	ms	
88	PATASCHTSADAU	pataStsadaU	Sts	
89	ADÖH ADAI	Qad2:QadaI	2:Q	
90	ATAPFLADEU	Qatapfla:daU	pfl	
91	ADÖHBADAI	Qad2:ba:daI	2:b	
92	ADÜCHADAI	QadYCadaI	YC	
93	ATAG ADAI	QatagQadaI	gQ	
94	DATEUÜHTADEU	da:tOYy:tadOY	OYy:	
95	ATANBADAI	Qatanba:daI	nb	
96	PATEGADAU	pat@gadaU	@g	
97	ATAFÖTTADAU	Qataf9tadaU	f9	
98	PATÜPFADAU	patYpfa:daU	Ypf	
99	ATASCHÖTTADAU	QataZ9tadaU	Z9	
100	ATAW ADAI	QatavQadaI	vQ	
101	ATANGÜTTADAU	QataNYtadaU	NY	
102	ADAH ADAI	Qada:QadaI	a:Q	
103	PATANKADAU	patankadaU	nk	
104	PATEEFADAU	pa:te:fa:daU	e:f	
105	ATANGJADEU	QataNja:daU	Nj	
106	ATATZÜTTADAU	QatatsYtadaU	tsY	
107	ADISSADAG	QadIsadag	g*	
108	ADIDDADAI	QadIdadaI	Id	
109	PATASPFADAU	pataspfa:daU	spf	
110	DATEEOHTADEU	da:te:o:tadOY	e:o:	
111	DATUAHTADEU	datu:a:tadOY	u:a:	
112	ATABHADEU	QatabhadOY	bh	
113	ATAFSADAI	QatafsadaI	fs	
114	DATÄUHTADEU	datE:u:tadOY	E:u:	
115	ATAPFAUTADEU	QatapfaUtadOY	pfaU	
116	PATASFADAU	patasfa:daU	sf	
117	ATATSCHADAI	Qatat Sa:daI	tS	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
118	ATAPAUTADEU	QatapaUtadOY	paU	
119	PATAWPFADAU	patavpfa:daU	vpf	
120	ATTAJETADEU	Qatadj@tadOY	j@	
121	PATÜHGADAU	paty:gadaU	y:g	
122	PATANTSCHADAU	patantSa:daU	ntS	
123	ATAMUTTADAU	QatamUtadaU	mU	
124	ATARRETADEU	QataR@tadOY	R@	
125	ADISSADDU	Qa:dIsadU	U*	
126	ATABNADEU	QatabnadOY	bn	
127	ATATZTADAI	QatatstadaI	tst	
128	PATATTSADAU	patattsadaU	tts	
129	ATAFSCHADAI	QatafZadaI	fZ	
130	ATAJDADAI	QatajdadaI	jd	
131	ATEEUTTADAU	Qa:te:UtadaU	e:U	
132	ATAHNGADEU	QatahNadOY	hN	
133	ATAPITTADAU	QatapItadaU	pI	
134	ATAÜTTADAU	QataYtadaU	aY	
135	ATAWMADEU	Qatavma:daU	vm	
136	ATATZMADEU	Qatatsma:daU	tsm	
137	DATASAHTADEU	da:taza:tadOY	za:	
138	KADISSADAI	ka:dIsadaI	*k	
139	DATTECHOHTADEU	dat@Co:tadOY	Co:	
140	ATANPADAI	QatanpadaI	np	
141	ATAPFAITADEU	QatapfaItadOY	pfal	
142	ADÄHSADAI	QadE:zadaI	E:z	
143	ATIEERDADEU	Qati:6da:daU	i:6	
144	DATAWAHTADEU	da:tava:tadOY	va:	
145	ATATSCHJADEU	QatatSja:daU	tSj	
146	ATTER ADAI	Qat6QadaI	6Q	
147	PATAFFADAU	patafa:daU	af	
148	ATAMMETADEU	Qatam@tadOY	m@	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
149	*FADISADAI	fadIsadaI	*f	
150	ATAIERDADEU	QataI6da:daU	aI6	
151	ADÜHWADAI	Qady:vadaI	y:v	
152	DATAKÖHTADEU	da:tak2:tadOY	k2:	
153	PATIPFADAU	patIpfA:daU	Ipf	
154	ADÖHSCHADAI	Qad2:Sa:daI	2:S	
155	ATÖUTTADAU	Qat2:UtadaU	2:U	
156	ATASOTTADAU	QatazOtadaU	zO	
157	DATATÖHTADEU	datat2:tadOY	t2:	
158	DATADÄHTADEU	da:tadE:tadOY	dE:	
159	ATANGRADEU	QataNRa:dEU	NR	
160	ATTECHHADEU	QatEChadOY	Ch	
161	ATÜNNADEU	QatYnadOY	Yn	
162	ATA ÖTTADAU	QataQ9tadaU	Q9	
163	ATASEUTADAU	QatasOYtadaU	sOY	
164	ATASTADAI	QataztadaI	zt	
165	APAKLADEU	Qapa:kla:daU	kl	
166	ATAJ ADAI	QatajQadaI	jQ	
167	ATATSCHERTADEU	QatatS6tadOY	tS6	
168	ATÄHNADEU	QatE:nadOY	E:n	
169	ATAGGERTADEU	Qatag6tadOY	g6	
170	ATAWCHADAI	QatavxadaI	vx	
171	ADAHWADAI	Qada:vadaI	a:v	
172	ADAHSCHADAI	Qada:Za:daI	a:Z	
173	ATAOTTADAU	QataOtadaU	aO	
174	ATIERADEU	Qati:RadEU	i:R	
175	ADUTTADEI	QadUtadaI	Ut	
176	ATANGLADEU	QataNla:daU	Nl	
177	PATÄHPFADAU	patE:pfa:daU	E:pf	
178	DATÜIEHTADEU	daty:i:tadOY	y:i:	
179	DATTERÖHTADEU	dat62:tadOY	2:6	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
180	ATAWSCHADAI	QatavSa:daI	vS	
181	GADISSADAI	ga:dIsadaI	*g	
182	PATOGGADAU	patOgadaU	Og	
183	PATASCHKADAU	pataZkadaU	Zk	
184	DATABUHTADEU	da:tabu:tadOY	bu:	
185	PATAJTSADAU	patajtsadaU	jts	
186	ATAMMADEU	Qatama:daU	am	
187	ADAI ADAU	QadaIQadaU	aIQ	
188	ATALATTADAU	QatalatadaU	la	
189	DATIEAHTADEU	dati:a:tadOY	i:a:	
190	ATABÖTTADAU	Qatab9tadaU	b9	
191	ATÜHADEU	QatYhadOY	Yh	
192	PATARTSADAU	pataRtsadaU	Rts	
193	ADISSADÖH	Qa:dIsad2:	2:*	
194	DATANÜHTADEU	da:tany:tadOY	ny:	
195	PATÜGGADAU	patYgadaU	Yg	
196	ATASCHMADEU	QataSma:daU	Sm	
197	DATAJÜHTADEU	da:tajy:tadOY	jy:	
198	ATASCHUTTADAU	QataZUtadaU	ZU	
199	DATAWEHTADEU	da:tave:tadOY	ve:	
200	ATAHATTADAU	QatahatadaU	ha	
201	ADOHSCHADAI	Qado:Sa:daI	o:S	
202	ATAKÖTTADAU	Qatak9tadaU	k9	
203	ATANG ADAI	QataNQadaI	NQ	
204	DATAGEHTADEU	da:ta:ge:tadOY	ge:	
205	PATASCHTSCHADAU	pataZtSadaU	ZtS	
206	DATALAHTADEU	data:la:tadOY	la:	
207	ADOHSADEI	Qado:zadaI	o:z	
208	PATTECHFADAU	patECfa:daU	Cf	
209	PATASCHTSADAU	pataZtsadaU	Zts	
210	ATAHWADAI	QatahvadaI	hv	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
211	ATASCHITTADAU	QataSItadaU	SI	
212	DATAAUHTADEU	da:ta:u:tadOY	a:u:	
213	ATASÄTTADAU	QatasEtadaU	sE	
214	ATAFÜTTADAU	QatafYtadaU	fY	
215	ATTECHSADAI	Qat@CzadaI	Cz	
216	DATOOÖHTADEU	dto:2:tadOY	o:2:	
217	ATAFUTTADAU	QatafUtadaU	fU	
218	ATAPFHADEU	QatapfhadOY	pfh	
219	ADÄBBADAI	QadEba:daI	Eb	
220	ATÄHUTTADAU	QatE:UtadaU	E:U	
221	ATEUATTADAU	QatOYatadaU	OYa	
222	ADAUSADAI	QadaUsadaI	aUs	
223	ATA ÄTTADAU	Qata:QEtadaU	QE	
224	ATATSCH ADAI	QatatSQadaI	tSQ	
225	DATUOHTADEU	datu:o:tadOY	u:o:	
226	PATAMTSADAU	patamtsadaU	mts	
227	ATAIÜTTADAU	QataIYtadaU	aIY	
228	ATOHRADEU	Qato:RadoY	o:R	
229	ATADSCHADAI	QatadSadaI	dS	
230	PATACHFADAU	pataxfa:daU	xf	
231	ADISSADAP	Qa:dIsadap	p*	
232	ATAPFITTADAU	QatapfItadaU	pfi	
233	ATEURADEU	QatOYRadOY	OYR	
234	ATADDETADEU	Qatad@tadOY	d@	
235	ATATZEITADEU	QatatsaItadOY	tsaI	
236	DATATAHTADEU	datata:tadOY	ta:	
237	DATALÄHTADEU	datalE:tadOY	IE:	
238	DATEEAHTADEU	da:te:a:tadOY	e:a:	
239	DATEUIEHTADEU	da:tOYi:tadOY	OYi:	
240	ATATSCHAUTADEU	QatatsaUtadOY	tSaU	
241	DATAMÜHTADEU	da:tamy:tadOY	my:	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
242	ATAHCHADEU	Qata:xadOY	a:x	
243	ATÜJJADEU	QatYja:daU	Yj	
244	PATATGADAU	pata:tgadaU	tg	
245	DATASCHIEHTADEU	dataZi:tadOY	Zi:	
246	ATTECHÜTTADAU	QatECYtadaU	CY	
247	PATANTSADAU	patantsadaU	nts	
248	ATAHÜTTADAU	QatahYtadaU	hY	
249	ATASCHJADEU	QataSja:daU	Sj	
250	ATTEJADEU	Qat@ja:daU	@j	
251	ATÖLLADEU	Qat9la:daU	9l	
252	DATANGÜHTADEU	dataNy:tadOY	Ny:	
253	ATÜÖTTADAU	Qaty:9tadaU	y:9	
254	ATALRADEU	QatalRadOY	lR	
255	ATATEUTADAU	QatatOYtadaU	tOY	
256	ATAUJADEU	QataUja:daU	aUj	
257	ATANÜTTADAU	QatanYtadaU	nY	
258	ATAPWADAI	QatapvadaI	pv	
259	ADAHTZADAI	Qada:tsadaI	a:ts	
260	ATAPFCHADEU	QatapfxadOY	px	
261	ATTÖERDADEU	Qat96da:daU	96	
262	ATACHJADEU	Qataxja:daU	xj	
263	ATAPNADEU	QatapnadOY	pn	
264	DATÄÜHTADEU	datEy:tadOY	Ey:	
265	ATAJLADEU	Qatajla:daU	jl	
266	ATAJÖTTADAU	Qataj9tadaU	j9	
267	ATAPCHADAI	QatapxadaI	px	
268	DATAWÜHTADEU	da:tavy:tadOY	vy:	
269	ATA ÖHTADEU	QataQ2:tadOY	Q2:	
270	ATÄMMADEU	QatEma:daU	Em	
271	ADIETADAI	Qadi:tadaI	i:t	
272	PATAWGADAU	patavgadaU	vg	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
273	ATAFMADEU	Qatafma:daU	fm	
274	ATAWUTTADAU	QataVUtadaU	vU	
275	ATÖHLADEU	Qat2:la:daU	2:l	
276	ATATRADEU	QatatRadOY	tR	
277	DATABEHTADEU	da:tabe:tadOY	be:	
278	ADÄHSADAI	QadE:sadaI	E:s	
279	ATA AITANEU	QataQaItanOY	QaI	
280	ADATSCHADAI	QadatSadaI	atS	
281	PATOHFADAU	pato:fa:daU	o:f	
282	ADODDADAI	QadOdadaI	Od	
283	ATAPFTSADAI	QatapftsadaI	pfts	
284	DATAEHTADEU	datae:tadOY	ae:	
285	PATICKADAU	patIkadaU	Ik	
286	DATEUOHTADEU	da:tOYo:tadOY	OYo:	
287	PATARGADAU	pataRgadaU	Rg	
288	ATTEHADEU	Qat@hadOY	@h	
289	APAKSADAI	QapaksadaI	ks	
290	ADÖTSCHADAI	Qad9tSadaI	9tS	
291	PATAUFADAU	patQaUfQadaU	aUf	
292	DATASCHÖHTADEU	dataZ2:tadOY	Z2:	
293	ATTERLADEU	Qat6la:daU	6l	
294	ADÄTTADAI	QadEtadaI	Et	
295	ADUHSCHADAI	Qadu:ZadaI	u:Z	
296	ATAFITTADAU	QatafItadaU	fI	
297	DATASUHTADEU	datasu:tadOY	su:	
298	ATABDADAI	QatabdadaI	bd	
299	PATÖHPFADAU	pat2:pfa:daU	2:pf	
300	ATTECHEUTADEU	QatECOYtadOY	COY	
301	ATAKPADAI	QatakpadaI	kp	
302	ATATZPADAI	QatatspadaI	tsp	
303	ATANOTTADAU	QatanOtadaU	nO	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
304	ATAJHADEU	QatajhadOY	jh	
305	ATAPFEUTADEU	QatapfOYtadOY	pfOY	
306	ATAGITTADAU	QatagItadaU	gI	
307	PATAIKADAU	pataIkadaU	aIk	
308	ADAWWADAI	QadavadaI	av	
309	ADAIBADAU	QadaIba:daU	aIb	
310	ADEEBADAI	Qade:ba:daI	e:b	
311	DATALIEHTADEU	datali:tadOY	li:	
312	ATTERÜTTADAU	Qat6YtadaU	6Y	
313	ATAUERTADEU	QataU6tadOY	aU6	
314	ADOHDADAI	Qado:dadaI	o:d	
315	ATAKEUTADAU	Qata:kOYtadaU	kOY	
316	ATTECHATTADAU	QatECatadaU	Ca	
317	ATANJADEU	Qatanja:daU	nj	
318	ATÖHRADEU	Qat2:RadOY	2:R	
319	ADI ADAI	QadIQadaI	IQ	
320	ATACHHADEU	QataxhadOY	xh	
321	PATALFADAU	patalfa:daU	lf	
322	ATÖHADEU	Qat9hadOY	9h	
323	PATÖCKADAU	pat9kadaU	9k	
324	PATOHGADAU	pato:gadaU	o:g	
325	ATTÖATTADAU	Qat9atadaU	9a	
326	ATARÜTTADAU	QataRYtadaU	RY	
327	ATÖNNADEU	Qat9nadOY	9n	
328	ATEHEDADEU	Qa:te:@da:daU	e:@	
329	ATIENADEU	Qati:nadOY	i:n	
330	ATAFOTTADAU	QatafOtadaU	fO	
331	ATAJSCHADAI	QatajSa:daI	jS	
332	PATAGTSADAU	patagtsadaU	gts	
333	ATASWADAI	QatasvadaI	sv	
334	ATAPFETADEU	Qatapf@tadOY	pf@	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
335	ATANGSADAI	QataNzadaI	Nz	
336	ATARSADAI	QataRsadaI	Rs	
337	DATAJÄHTADEU	da:tajE:tadOY	jE:	
338	ATEUOTTADAU	QatOYOtadaU	OYO	
339	ADIESCHADAI	Qadi:ZadaI	i:Z	
340	ATAJUTTADAU	QatajUtadaU	jU	
341	ATA EUTANEU	QataQOYtanOY	QOY	
342	ATAMRADEU	QatamRadOY	mR	
343	ADISSADATSCH	Qa:dIsada:tS	tS*	
344	APADKADAU	QapadkadaU	dk	
345	ATATATTADAU	QatatatadaU	ta	
346	ADÜHPADAI	Qady:padaI	y:p	
347	ATATZNADEU	QatatsnadOY	tsn	
348	DATATZÄHTADEU	datatsE:tadOY	tsE:	
349	ATACHRADEU	QataxRadOY	xR	
350	ATAPFBADAI	Qatapfba:daI	pfb	
351	DATAWÄHTADEU	da:tavE:tadOY	vE:	
352	ATANEITADEU	QatanaItadOY	naI	
353	ADUTSCHADAI	QadUtSa:daI	UtS	
354	PATOHFPADAU	pato:pfa:daU	o:pf	
355	ATABSADAI	QatabzadaI	bz	
356	ATA ETTANEU	QataQ@tanOY	Q@	
357	ATTERSADAI	Qat6sadaI	6s	
358	ATADJADEU	QatadjadOY	dj	
359	PATASCHGADAU	pataSgadaU	Sg	
360	MADISADAI	ma:dizadaI	*m	
361	ADAISCHADEU	QadaISa:dOY	aIS	
362	ATANGBADAI	QataNba:daI	Nb	
363	ATATSCHLADEU	QatatSla:daU	tSl	
364	ADEUSADAI	QadOYsadaI	OYs	
365	DATAHÄHTADEU	da:tahE:tadOY	hE:	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
366	ADÖHTSCHADAI	Qad2:tSa:daI	2:tS	
367	ADISSADAB	QadIsadab	b*	
368	ADEESCHADAI	Qade:ZadaI	e:Z	
369	ATAJRADEU	QatajRadOY	jR	
370	DATAPFUHTADEU	da:tapfu:tadOY	pfu:	
371	PATATZPFADAU	patatspfa:daU	tspf	
372	ATANGEITADEU	QataNaItadOY	NaI	
373	DATACHIEHTADEU	da:taxi:tadOY	xi:	
374	DATAIOHTADEU	da:taIo:tadOY	aIo:	
375	ATÄÖTTADAU	QatE9tadaU	E9	
376	ATAPUTTADAU	QatapUtadaU	pU	
377	ADIECHADAI	Qadi:CadaI	i:C	
378	ATASCHITTADAU	QataZItadaU	ZI	
379	DATEUÄHTADEU	da:tOYE:tadOY	OYE:	
380	ATACHADAI	QatahCadaI	hC	
381	ATASCHÜTTADAU	QataZYtadaU	ZY	
382	ATAIHADEU	QatalhadOY	aIh	
383	DATÖUHTADEU	dat2:u:tadOY	2:u:	
384	ADISSADACH	Qa:dIsadax	x*	
385	ATATÜTTADAU	QatatYtadaU	tY	
386	ATATÖTTADAU	Qatat9tadaU	t9	
387	ADUHTADAI	Qadu:tadaI	u:t	
388	DATASÖHTADEU	datas2:tadOY	s2:	
389	ATAHITTADAU	QatahItadaU	hI	
390	ATAUNADEU	QataUnadOY	aUn	
391	ADÜPPADAI	QadYpadaI	Yp	
392	ATTECHUTTADAU	QatECUtadaU	CU	
393	DATASAHTADEU	datasa:tadOY	sa:	
394	ADAHSADAI	Qada:zadaI	a:z	
395	ATIRRADEU	QatIRadOY	IR	
396	ATAGGETADEU	Qatag@tadOY	g@	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
397	ATUHHADEU	Qatu:hadOY	u:h	
398	PATÄHGADAU	patE:gadaU	E:g	
399	DATAHOHTADEU	da:taho:tadOY	ho:	
400	ADÖHDADAI	Qad2:dadaI	2:d	
401	ATAUÜTTADAU	QataUYtadaU	aUY	
402	ADITZADAI	QadItsadaI	Its	
403	DATAKEHTADEU	da:ta:ke:tadOY	ke:	
404	DATAMEHTADEU	da:tame:tadOY	me:	
405	ATTECHSADAI	QatECsadaI	Cs	
406	PATEUGADAU	patOYgadaU	OYg	
407	ATAINADEU	QataInadOY	aIn	
408	ATAB ADAI	QatabQadaI	bQ	
409	DATALÜHTADEU	dataly:tadOY	ly:	
410	ATABTSCHADAU	QatabtSadaU	btS	
411	CHADISADAI	xadisadaI	*x	
412	ATIEATTADAU	Qati:atadaU	i:a	
413	ATATSCHSADAI	QatatSsadaI	tSs	
414	DATTERÄHTADEU	dat6E:tadOY	6E:	
415	ATAPFATTADAU	QatapfatadaU	pfa	
416	ATARÖTTADAU	QataR9tadaU	R9	
417	ATACHOTTADAU	QataxOtadaU	xO	
418	ATTECHPADAI	QatECpadaI	Cp	
419	APAKHADEU	QapakhadOY	kh	
420	PATAMGADAU	patamgadaU	mg	
421	ATTECHNADEU	QatECnadOY	Cn	
422	ATÄHRADEU	QatE:RadOY	E:R	
423	DATIEUHTADEU	dati:u:htadOY	i:u:	
424	ADÄ ADAI	QadEQadaI	EQ	
425	ATALLETADEU	Qatal@tadOY	l@	
426	ATABSCHADAI	QatabSadaI	bS	
427	ATÜATTADAU	QatYatadaU	Ya	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
428	ATARTADAI	QataRtadaI	Rt	
429	ATAJCHADAI	QatajCadaI	jC	
430	PATUFFADAU	patUfa:daU	Uf	
431	ATASÜTTADAU	QatasYtadaU	sY	
432	DATATZÖHTADEU	datats2:tadOY	ts2:	
433	ADÜ ADAI	QadYQadaI	YQ	
434	PATAJKADAU	patajkadaU	jk	
435	DATAPFÜHTADEU	da:tapfy:tadOY	pfy:	
436	ATADÜTTADAU	QatadYtadaU	dY	
437	ATAROTTADAU	QataROtadaU	RO	
438	ATUHNGADEU	Qatu:NadOY	u:N	
439	ATEEITTADAU	Qate:ItadaU	e:I	
440	DATAJEHTADEU	da:taje:tadOY	je:	
441	ATATSCHUTTADAU	QatatSUtadaU	tSU	
442	ATACHNADEU	QataxnadOY	xn	
443	ATAJWADAI	QatajvadaI	jv	
444	ATARUTTADAU	QataRUtadaU	RU	
445	ATADHADEU	QatadhadOY	dh	
446	DATAHÜHTADEU	da:tahy:tadOY	hy:	
447	ADISSADEH	Qa:dIsade:	e:*	
448	ATTEUTTADAU	Qat@ UtadaU	@U	
449	ATATITTADAU	QatatItadaU	tI	
450	ATAKAUTADEU	QatakaUtadOY	kaU	
451	ATATHADEU	QatathadOY	th	
452	ATAD ADAI	QatadQadaI	dQ	
453	ADUDDADAI	QadUdadaI	Ud	
454	ATASITTADAU	QatazItadaU	zI	
455	DATANGIEHTADEU	dataNi:tadOY	Ni:	
456	ATABCHADEU	QatabxadOY	bx	
457	ATAHÄTTADAU	QatahEtadaU	hE	
458	ATATZSCHADAI	QatatsZadaI	tsZ	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
459	ATTEITTADAU	Qat@ItadaU	@I	
460	DATANUHTADEU	da:tanu:tadOY	nu:	
461	DATARAHTADEU	dataRa:tadOY	Ra:	
462	ADOSSADAI	QadOsadaI	Os	
463	ATUÖTTADAU	Qatu:9tadaU	u:9	
464	ADÜBBADAI	QadYbadaI	Yb	
465	ATAHNADEU	Qata:nadOY	a:n	
466	ADISSADANG	Qa:dIsadaN	N*	
467	ATAUOTTADAU	QataUOtadaU	aUO	
468	ATACHSADAI	QataxsadaI	xs	
469	ADISSADIEH	Qa:dIsadi:	i:*	
470	SCHADISADAI	Sa:dizadaI	*S	
471	ATAIÖTTADAU	QataI9tadaU	aI9	
472	ATÖJJADEU	Qat9jadOY	9j	
473	ATAREITADEU	QataRaItadOY	RaI	
474	ADAIPADAU	QadaIpadaU	aIp	
475	ATEENGADEU	Qate:NadOY	e:N	
476	PATARFADAU	pataRfadaU	Rf	
477	DATAÜHTADEU	da:tay:tadOY	ay:	
478	DATTECHAHTADEU	da:tECa:tadOY	Ca:	
479	DATAMÄHTADEU	da:tamE:tadOY	mE:	
480	ATASCHRADEU	QataSRadOY	SR	
481	ATÖHCHADEU	Qat2:CadOY	2:C	
482	ADÄPPADAI	QadEpadaI	Ep	
483	ADÄDDADAI	QadEdadaI	Ed	
484	ADOTZADAI	QadOtsadaI	Ots	
485	ADOSADAI	QadOzadaI	Oz	
486	ATASCHERTADEU	QataS6tadOY	S6	
487	ATÜHJADEU	Qaty:ja:daU	y:j	
488	ATAAERDADEU	Qata:6da:daU	a:6	
489	ATTERSADAI	Qat6zadaI	6z	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
490	ATASCHSCHADAI	QataZSa:daI	ZS	
491	ATASCHÄTTADAU	QataSEtadaU	SE	
492	ATADÄTTADAU	QatadEtadaU	dE	
493	DATOOIEHTADEU	dato:i:tadOY	o:i:	
494	ATTEOTTADAU	Qat@OtadaU	@O	
495	ATASCHSSADAI	QataZsadaI	Zs	
496	ADUSCHADAI	QadUZa:daI	UZ	
497	ATATZATTADAU	QatatsatadaU	tsa	
498	DATÄUHTADEU	datEu:tadOY	Eu:	
499	ADISSADEU	Qa:dIsadOY	OY*	
500	ATATBADAI	Qata:tba:daI	tb	
501	ATAHEITADEU	QatahaItadOY	haI	
502	ATANGSADAI	QataNsadaI	Ns	
503	ATASCHTADAI	QataStadaI	St	
504	DATÄAHTADEU	da:tE:a:tadOY	E:a:	
505	DATÜOHTADEU	daty:o:tadOY	y:o:	
506	PATUHKADAU	patu:kadaU	u:k	
507	ATAWDADAI	QatavdadaI	vd	
508	ATTESSADAI	Qat@sadaI	@s	
509	ATÄERDADEU	QatE:6da:daU	E:6	
510	ATÄHOTTADAU	QatE:OtadaU	E:O	
511	ATAT ADAI	QatatQadaI	tQ	
512	ATAHJADEU	Qata:ja:daU	a:j	
513	PATÄHKADAU	patE:kadaU	E:k	
514	PATANGADAU	patangadaU	ng	
515	APADFADAU	QapadfadaU	df	
516	ATÜHRADEU	Qaty:Ra:dOY	y:R	
517	ATTERCHADEU	Qat6xadOY	6x	
518	ATAHETADEU	Qatah@tadOY	h@	
519	ATAUNGADEU	QataUNadOY	aUN	
520	ATAGPADAI	QatagpadaI	gp	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
521	ATALUTTADAU	Qata:lUtadaU	IU	
522	APAKGADAU	QapakgadaU	kg	
523	ATA UTTADAU	QataQUtadaU	QU	
524	PATAMFADAU	patamfa:daU	mf	
525	ATOHCHADEU	Qato:xadOY	o:x	
526	DATAUÖHTADEU	da:taU2:tadOY	aU2:	
527	ATEEJADEU	Qa:te:ja:daU	e:j	
528	ATTECHLADEU	QatECla:daU	Cl	
529	ATAUCHADEU	QataUxadOY	aUx	
530	ATATSCHITTADAU	QatatSItadaU	tSI	
531	ATATSCHEITADEU	QatatSaItadOY	tSaI	
532	ATATSCHETADEU	QatatS@tadOY	tS@	
533	DATIEÜHTADEU	dati:y:tadOY	i:y:	
534	APAKPFADAU	Qapakpfa:daU	kpf	
535	PATALTSADAU	pataltsadaU	lts	
536	DATACHÜHTADEU	da:taxy:tadOY	xy:	
537	DATÖIETADEU	dat2:i:tadOY	2:i:	
538	ATTECHERTADEU	QatEC6tadOY	C6	
539	DATAPFEHTADEU	da:tapfe:tadOY	pfe:	
540	ADEUSCHADAI	QadOYZadaI	OYZ	
541	ADÄHDADAI	QadE:dadaI	E:d	
542	ATAUETADEU	QataU@tadOY	aU@	
543	DATAIEHTADEU	datai:tadOY	ai:	
544	ATASCHBADAI	QataZbadaI	Zb	
545	ATAIÄTTADAU	QataIEtadaU	aIE	
546	DATASOHTADEU	dataso:tadOY	so:	
547	ADOH ADAI	Qado:QadaI	o:Q	
548	ATOOÜTTADAU	Qato:YtadaU	o:Y	
549	ATASUTTADAU	QatasUtadaU	sU	
550	ATARATTADAU	QataRatadaU	Ra	
551	ATAKUTTADAU	QatakUtadaU	kU	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
552	DATAÖHTADEU	da:ta2:tadOY	a2:	
553	ADISSADUH	Qa:dIsadu:	u:*	
554	ATÄEDADEU	QatE@dadOY	E@	
555	JADISADAI	ja:dizadaI	*j	
556	ATTEATTADAU	Qat@atadaU	@a	
557	ADÜSCHADAI	QadYSadaI	YS	
558	DATAPFIEHTADEU	da:tapfi:tadOY	pfi:	
559	ATAWJADEU	Qatavja:daU	vj	
560	ATAFAUTADEU	QatafaUtadOY	faU	
561	ATAJNADEU	QatajnadOY	jn	
562	ATANGNADEU	QataNnadOY	Nn	
563	ATEULADEU	QatOYla:daU	OYl	
564	DATATÜHTADEU	dataty:tadOY	ty:	
565	PATEEGADAU	pa:te:gadaU	e:g	
566	ATAAITTADAU	Qata:ItadaU	a:I	
567	DATALÖHTADEU	datal2:tadOY	l2:	
568	ADEUCHADAI	QadOYCadaI	OYC	
569	ADAITADEU	QadaItadOY	aIt	
570	DATAWOHTADEU	da:tavo:tadOY	vo:	
571	ATAREUTADEU	QataROYtadOY	ROY	
572	PATUCKADAU	patUkadaU	Uk	
573	ATAPAHTADEU	Qatapa:tadOY	pa:	
574	DATASCHAHTADEU	da:taSa:tadOY	Sa:	
575	ATUMMADEU	Qa:tUma:daU	Um	
576	ADISSADECH	Qa:dIsadEC	C*	
577	ATÜNGADEU	QatYNadOY	YN	
578	ATAULADEU	QataUla:daU	aUl	
579	DATAPFÄHTADEU	da:tapfE:tadOY	pfE:	
580	ATTERTADAI	Qat6tadaI	6t	
581	ATABWADAI	QatabvadaI	bv	
582	ATTERSCHADAI	Qat6ZadaI	6Z	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
583	ADÜSSADAI	QadYsadaI	Ys	
584	AZAMPADAI	QatsampadaI	mp	
585	ADABBADAI	QadabadaI	ab	
586	ATIEUTTADAU	Qati:UtadaU	i:U	
587	DATATZUHTADEU	datatsu:tadOY	tsu:	
588	ATAPFSCHADAI	QatapfSa:daI	pfS	
589	ADÜHSADAI	Qady:zadaI	y:z	
590	DATAÄHTADEU	da:taE:tadOY	aE:	
591	ATAMCHADAI	QatamxadaI	mx	
592	ATAÄTTADAU	QataEtadaU	aE	
593	ATATSCHEUTADEU	QatatSOYtadOY	tSOY	
594	ADÄCHADAI	QadECadaI	EC	
595	ATÄHÜTTADAU	QatE:YtadaU	E:Y	
596	ADUTZADAI	QadUtsadaI	Uts	
597	ATEELADEU	Qa:te:la:daU	e:l	
598	ATASAUTADEU	QatazaUtadOY	zaU	
599	DATAKAHTADEU	dataka:htadOY	ka:	
600	ATABGADAU	QatabgadaU	bg	
601	ATARNGADEU	QataRNadOY	RN	
602	ATATSCHMADEU	QatatSma:daU	tSm	
603	ATANGETADEU	QataN@tadOY	N@	
604	ATÖHMADEU	Qat2:ma:daU	2:m	
605	PATALGADAU	patalgadaU	lg	
606	ADEETSCHADAI	Qade:tSa:daI	e:tS	
607	ATASCHWADAI	QataZvadaI	Zv	
608	PATARPFADAU	pataRpfadaU	Rpf	
609	PATACHGADAU	pataxgadaU	xg	
610	ADISSADDER	Qa:dIsad6	6*	
611	DATOOÄHTADEU	dato:E:tadOY	o:E:	
612	ATACKERTADEU	Qatak6tadOY	k6	
613	ATANGITTADAU	QataNItadaU	NI	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
614	ATADSCHADAI	QatadZadaI	dZ	
615	ATAPFSADAI	QatapfsadaI	pfs	
616	ADAITZADAI	QadaItsadaI	aIts	
617	ATADATTADAU	QatadatadaU	da	
618	ATAHJADEU	QatahjadOY	hj	
619	ATUHADEU	QatUhadOY	Uh	
620	ADOHWADAI	Qado:vadaI	o:v	
621	ATADTADAI	QatadtadaI	dt	
622	ADISSADDÖ	QadIsad9	9*	
623	DATÖAHTADEU	dat2:a:tadOY	2:a:	
624	ATALEUTADEU	QatalOYtadOY	IOY	
625	PATANGTSADAU	pataNtsadaU	Nts	
626	ATASDADAI	QatasdadaI	sd	
627	ATATSCHOTTADAU	QatatSOtadaU	tSO	
628	ATÄNNADEU	QatEnadOY	En	
629	ATACHDADAI	QataxdadaI	xd	
630	DATIEÄHTADEU	dati:E:tadOY	i:E:	
631	APAKCHADAI	QapakxadaI	kx	
632	ATAERTADEU	Qata6tadOY	a6	
633	ATAMNADEU	QatamnadOY	mn	
634	DATTEAUTADEU	dat@aUtadOY	@aU	
635	ATANGMADEU	QataNma:daU	Nm	
636	ATADSADAI	QatadzadaI	dz	
637	ADISSADAM	Qa:dIsa:dam	m*	
638	PATATSCHKADAU	patatSkadaU	tSk	
639	ATAWLADEU	Qatavla:daU	vl	
640	PATACHKADAU	pataxkadaU	xk	
641	DATÖEHTADEU	dat2:e:tadOY	2:e:	
642	PATAGTSCHADAU	patagtSadaU	gtS	
643	ATÖCHADEU	Qat9xadOY	9x	
644	PATANGKADAU	pataNkadaU	Nk	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
645	DATAPFOHTADEU	da:tapfo:tadOY	pfo:	
646	ATARMADEU	QataRmadOY	Rm	
647	ATUHRADEU	Qatu:RadOY	u:R	
648	ATAPRADEU	QatapRadOY	pR	
649	ATÖÖTTADAU	Qat2:OtadaU	2:O	
650	ADUHSADAI	Qadu:zadaI	u:z	
651	DATAHÖHTADEU	da:tah2:tadOY	h2:	
652	PATAPFKADAU	patapfkadaU	pfk	
653	DATAUAHTADEU	da:taUa:tadOY	aUa:	
654	DATALAHTADEU	datale:tadOY	le:	
655	DATAAÄHTADEU	da:ta:E:tadOY	a:E:	
656	ATEEMADEU	Qa:te:ma:daU	e:m	
657	DATASCHOHTADEU	dataZo:tadOY	Zo:	
658	ATAKDADAI	QatakdaI	kd	
659	ATASRADEU	QatasRa:dOY	sR	
660	ATAMWADAI	QatamvadaI	mv	
661	ATULLADEU	QatUla:daU	Ul	
662	ATACHÖTTADAU	Qatax9tadaU	x9	
663	ATALLADEU	Qatala:daU	al	
664	ATIEDADEU	QatI@dadOY	I@	
665	APAKSCHADAI	QapakZadaI	kZ	
666	ADÖPPADAI	Qad9padaI	9p	
667	ATÖHNADEU	Qat2:nadOY	2:n	
668	PATAJPFADAU	patajpfadaU	jpf	
669	ADIEWADAI	Qadi:vadaI	i:v	
670	ATATZJADEU	Qatatsja:daU	tsj	
671	ADISSADAI	Qa:dIsadaI	Is	
672	ATACHETADEU	Qatax@tadOY	x@	
673	DATAUEHTADEU	dataUe:tadOY	aUe:	
674	ADAUWADAI	QadaUvadaI	aUv	
675	ATANGUTTADAU	QataNUtadaU	NU	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
676	DATOOEHTADEU	dato:e:tadOY	o:e:	
677	ATASCHNADEU	QataZnadOY	Zn	
678	ADÄSSADAI	QadEsadaI	Es	
679	ATUEDADEU	QatU@da:dOY	U@	
680	ATÜITTADAU	QatYItadaU	YI	
681	ATAPEHTADEU	Qatape:tadOY	pe:	
682	ATATSCHNADEU	QatatSnadOY	tSn	
683	ATAGOTTADAU	Qata:gOtadaU	gO	
684	ATAHÖTTADAU	Qatah9tadaU	h9	
685	ATAFFETADEU	Qataf@tadOY	f@	
686	ATAAUTTADAU	Qata:UtadaU	a:U	
687	PATASTSCHADAU	patastSa:daU	stS	
688	ADATZADAI	QadatsadaI	ats	
689	ATAPFÄTTADAU	QatapfEtadaU	pfE	
690	PATASCHFADAU	pataSfa:daU	Sf	
691	PATAJGADAU	patajgadaU	jg	
692	ATTÖÜTTADAU	Qat9YtadaU	9Y	
693	PATÄHFADAU	patE:fa:daU	E:f	
694	ATAMSCHADAI	QatamSa:daI	mS	
695	ATOHMADEU	Qato:ma:daU	o:m	
696	APAKWADAI	QapakvadaI	kv	
697	ATEERADEU	Qate:RadOY	e:R	
698	ATAPPETADEU	Qatap@tadOY	p@	
699	ATASCHAUTADEU	QataSaUtadOY	SaU	
700	DATTEUHTADEU	dat@u:tadOY	@u:	
701	ATÄHMADEU	QatE:ma:daU	E:m	
702	ATANGÖTTADAU	QataN9tadaU	N9	
703	ADISSADÄH	Qa:dIsadE:	E:*	
704	ATAGWADAI	QatagvadaI	gv	
705	ATASCHRADEU	QataZRadOY	ZR	
706	APAKSCHADAI	QapakSa:daI	kS	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
707	ADEETZADAI	Qade:tsadaI	e:ts	
708	ATAPMADEU	Qatapma:daU	pm	
709	ATÄHADEU	QatE:hadOY	E:h	
710	ADAPPADAI	QadapadaI	ap	
711	DATASÜHTADEU	datasy:tadOY	sy:	
712	DATAGIEHTADEU	da:tagi:tadOY	gi:	
713	ATAHNGADEU	Qata:NadOY	a:N	
714	ATIHADEU	QatlhadOY	lh	
715	ATATSCHRADEU	QatatSRadOY	tSR	
716	SADISADAI	za:dizadaI	*z	
717	ATOHHADEU	Qato:hadOY	o:h	
718	ATEUEDADEU	QatOY@da:daU	OY@	
719	ADISSADAW	Qa:dIsadav	v*	
720	PATATZKADAU	patatskadaU	tsk	
721	ATUCHADEU	QatUxadOY	Ux	
722	DATASÄHTADEU	datasE:tadOY	sE:	
723	DATTEÖHTADEU	da:t@2:tadOY	@2:	
724	PATOFFADAU	patOfa:daU	Of	
725	ATASEUTADEU	Qata:zOYtadOY	zOY	
726	ADAUPADAI	QadaUpadaI	aUp	
727	ATALÜTTADAU	QatalYtadaU	lY	
728	PATALKADAU	patalkadaU	lk	
729	ATASBADAI	QatazbadaI	zb	
730	ATALDADAI	QataldadaI	ld	
731	PATUHPFADAU	patu:pfa:daU	u:pf	
732	ATAPHADEU	QataphadOY	ph	
733	PATTEKADAU	pat@kadaU	@k	
734	ATAKATTADAU	QatakatadaU	ka	
735	ATIERDADEU	QatI6dadOY	I6	
736	ATAIJADEU	QataIja:daU	aIj	
737	PATÄFFADAU	patEfa:daU	Ef	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
738	ADIESADAI	Qadi:zadaI	i:z	
739	ATAMEITADEU	QatamaItadOY	maI	
740	ATA EHTADEU	QataQe:tadOY	Qe:	
741	ATAWITTADAU	QatavItadaU	vI	
742	ATÖÄTTADAU	Qat2:EtadaU	2:E	
743	ATAWNADEU	QatavnadOY	vn	
744	ATÄHCHADEU	QatE:CadOY	E:C	
745	DADISSADAI	da:dIsadaI	*d	
746	ADÄHWADAI	QadE:vadaI	E:v	
747	ATASWADAI	QatazvadaI	zv	
748	ATAPJADEU	Qatapja:daU	pj	
749	ATAFTADAI	QataftadaI	ft	
750	ATTERWADAI	Qat6vadaI	6v	
751	ATAPUHTADEU	Qatapu:tadOY	pu:	
752	ATAGEUTADEU	Qata:gOYtadOY	gOY	
753	DATASCHÜHTADEU	dataZy:tadOY	Zy:	
754	ADIE ADAI	Qadi:QadaI	i:Q	
755	ADÄHTZADAI	QadE:tsadaI	E:ts	
756	DATADUHTADEU	da:tadu:tadOY	du:	
757	ATTECHRADEU	QatECRa:dOY	CR	
758	ATAILADEU	QataIladOY	aI	
759	ATONGADEU	QatONadOY	ON	
760	DATOOÜHTADEU	dato:y:tadOY	o:y:	
761	ATUHLADEU	Qatu:la:daU	u:l	
762	ADIESADAI	Qadi:sadaI	i:s	
763	DATADAHTADEU	da:tada:tadOY	da:	
764	ATEUNGADEU	QatOYNadOY	OYN	
765	ATÜMMADEU	QatYma:daU	Ym	
766	ATÜÄTTADAU	Qaty:EtadaU	y:E	
767	ADEUTSCHADAI	QadOYtSa:daI	OYtS	
768	ATATDADAI	Qata:tdadaI	td	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
769	RADISADAI	RadizadaI	*R	
770	PATTERFADAU	pat6fa:daU	6f	
771	PATASCHFADAU	pataZfadaU	Zf	
772	DATAHUHTADEU	da:tahu:tadOY	hu:	
773	ATEEÄTTADAU	Qa:te:EtadaU	e:E	
774	ATAGAITADEU	Qata:gaItadOY	gaI	
775	ATAFATTADAU	QatafatadaU	fa	
776	ATAKTADAI	QataktadaI	kt	
777	DATAKOHTADEU	da:tako:tadOY	ko:	
778	ATÖÜTTADAU	Qat2:YtadaU	2:Y	
779	ATAAEDADEU	Qata:@da:daU	a:@	
780	ATAKÜTTADAU	QatakYtadaU	kY	
781	ATADMADEU	QatadmadoY	dm	
782	PATASPFADAU	patazpfadaU	zpf	
783	ATEEATTADAU	Qa:te:atadaU	e:a	
784	ATAPLADEU	Qata:pla:daU	pl	
785	DATANGAHTADEU	dataNa:tadOY	Na:	
786	DATTEOHTADEU	da:t@o:tadOY	@o:	
787	DATANGÖHTADEU	dataN2:tadOY	N2:	
788	LADISADAI	la:dizadaI	*I	
789	PATAMTSCHADAU	patamtSa:daU	mtS	
790	DATAAÜHTADEU	da:ta:y:tadOY	a:y:	
791	ATASSCHADAI	QatazZadaI	zZ	
792	ATÜOTTADAU	Qaty:OtadaU	y:O	
793	ATAETADEU	Qata@tadOY	a@	
794	ADEEWADAI	Qade:vadaI	e:v	
795	ATOJJADAI	QatOjadaI	Oj	
796	ATATUTTADAU	QatatUtadaU	tU	
797	DATAPFAHTADEU	da:tapfa:tadOY	pfa:	
798	DATTEEHTADEU	dat@e:tadOY	@e:	
799	DATARÜHTADEU	dataRy:tadOY	Ry:	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
800	DATATEHTADEU	data:te:tadOY	te:	
801	PATAKADAU	patakadaU	ak	
802	ATAGHADEU	QataghadOY	gh	
803	ATOERTADEU	QatO6tadOY	O6	
804	ATAPOTTADAU	QatapOtadaU	pO	
805	ATIEJADEU	Qati:ja:daU	i:j	
806	ATAKAITADEU	QatakaItadOY	kaI	
807	ADIPPADAI	QadIpadaI	Ip	
808	DATÜUHTADEU	daty:u:tadOY	y:u:	
809	ATAGSCHADAI	QatagZadaI	gZ	
810	ATATCHADEU	QatatxadOY	tx	
811	ATAMJADEU	Qatamja:daU	mj	
812	ATÖERDADEU	Qat2:6dadOY	2:6	
813	ATACHSCHADAI	QataxZadaI	xZ	
814	ADÖSCHADAI	Qad9Sa:daI	9S	
815	ATATZOTTADAU	QatatsOtadaU	tsO	
816	PATOHKADAU	pato:kadaU	o:k	
817	ATATTETADEU	Qatat@tadOY	t@	
818	ATABBETADEU	QatQapb@tadOY	b@	
819	ATAUITTADAU	QataUItadaU	aUI	
820	ADISSADDE	Qa:dIsad@	@*	
821	ADUSSADAI	QadUsadaI	Us	
822	PATASGADAU	patazgadaU	zg	
823	ATAUATTADAU	QataUatadaU	aUa	
824	ATAFÄTTADAU	QatafEtadaU	fE	
825	ATALSCHADAI	QatalSa:daI	lS	
826	PATAFPFADAU	patafpfa:daU	fpf	
827	PATEEKADAU	pa:te:kadaU	e:k	
828	PATAFGADAU	patafgadaU	fg	
829	ATOHJADEU	Qato:ja:daU	o:j	
830	ATASCHOTTADAU	QataZOtadaU	ZO	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
831	APAKMADEU	Qapakma:daU	km	
832	ATAHUTTADAU	QatahUtadaU	hU	
833	ATAPIEHTADEU	Qatapi:tadOY	pi:	
834	ATIEÄTTADAU	Qati:EtadaU	i:E	
835	DATTERÜHTADEU	dat6y:tadOY	6y:	
836	DATATZEHTADEU	datatse:tadOY	tse:	
837	ADOTSCHADAI	QadOtSadaI	OtS	
838	ATTERATTADAU	Qat6atadaU	6a	
839	ATANRADEU	QatanRadOY	nR	
840	ATATSCHWADAI	QatatSvadaI	tSv	
841	SCHADISADAI	ZadisadaI	*Z	
842	ADÖSCHADAI	Qad9ZadaI	9Z	
843	ATAGAUTADEU	Qata:gaUtadOY	gaU	
844	ATANGERTADEU	QataN6tadOY	N6	
845	DATTEEITADEU	da:t@altadOY	@aI	
846	ADÖHSADAI	Qad2:zadaI	2:z	
847	ATANSCHADAI	QatanZadaI	nZ	
848	ATA OHTADEU	QataQo:tadOY	Qo:	
849	PATÜHKADAU	paty:kadaU	y:k	
850	ATASCHNADEU	QataSnadOY	Sn	
851	ATANUTTADAU	QatanUtadaU	nU	
852	DATASOHTADEU	da:tazo:tadOY	zo:	
853	ATTESCHADAI	Qat@ZadaI	@Z	
854	DATÄAHTADEU	datEa:tadOY	Ea:	
855	ATABSADAI	QatabsadaI	bs	
856	ATASSERTADEU	Qataz6tadOY	z6	
857	ATACHSCHADAI	QataxSa:daI	xS	
858	ATA AHTADEU	QataQa:tadOY	Qa:	
859	ATARÄTTADAU	QataREtadaU	RE	
860	ATTELADEU	Qat@la:daU	@l	
861	ATÄERDADEU	QatE6dadOY	E6	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
862	ATAGRADEU	QatagRadOY	gR	
863	ATATZEUTADAU	QatatsOYtadaU	tsOY	
864	PATOCKADAU	patOkadaU	Ok	
865	APAKRADEU	QapakRadOY	kR	
866	ATAURADEU	QataURadOY	aUR	
867	ATAMMERTADEU	Qatam6tadOY	m6	
868	ATÄHATTADAU	QatE:atadaU	E:a	
869	PATATZFADAU	patatsfa:daU	tsf	
870	DATEEÖHTADEU	da:te:2:tadOY	e:2:	
871	ATAR ADAI	QataRQadaI	RQ	
872	ADAISADEU	QadaIsadOY	aIs	
873	ATAHADEU	QatahadOY	ah	
874	ATAWÄTTADAU	QatavEtadaU	vE	
875	ATOLLADEU	QatOla:daU	Ol	
876	ADÖSSADAI	Qad9sadaI	9s	
877	ATAFFERTADEU	Qataf6tadOY	f6	
878	DATASÜHTADEU	da:tazy:tadOY	zy:	
879	ATÄHITTADAU	QatE:ItadaU	E:I	
880	ATATTERTADEU	Qatat6tadOY	t6	
881	ATA OTTADAU	QataQOotadaU	QO	
882	ATTENGADEU	Qat@NadOY	@N	
883	ATTEÄTTADAU	Qat@EtadaU	@E	
884	DATATIEHTADEU	datati:tadOY	ti:	
885	PATIEKADAU	pati:ktadaU	i:k	
886	PATALPFADAU	patalpfa:daU	lpf	
887	DATTEROHTADEU	dat6o:tadOY	6o:	
888	ATAGSCHADAI	QatagSadaI	gS	
889	ATTESCHADAI	Qat@Sa:daI	@S	
890	PATUPFADAU	patUpfa:daU	Upf	
891	ATAGÜTTADAU	Qata:gYtadaU	gY	
892	ATUNNADEU	QatUnadOY	Un	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
893	PATAPFFADAU	patapffadaU	pff	
894	DATAGUHTADEU	da:ta:gu:tadOY	gu:	
895	DATANÄHTADEU	da:tanE:tadOY	nE:	
896	ATASCHWADAI	QataSvadaI	Sv	
897	ATAHRADEU	Qata:RadOY	a:R	
898	PATAGADAU	patagadaU	ag	
899	ATASCHATTADAU	QataSatadaU	Sa	
900	ATACHPADAI	QataxpadaI	xp	
901	ATAHOTTADAU	QatahOtadaU	hO	
902	ATABSCHADAI	QatabZadaI	bZ	
903	ATATZÄTTADAU	QatatsEtadaU	tsE	
904	ADISADAI	QadIzadaI	Iz	
905	ATANGEUTADEU	QataNOYtadOY	NOY	
906	ATAM ADAI	QatamQadaI	mQ	
907	ATASSETADEU	Qataz@tadOY	z@	
908	PATEEPFADAU	pa:te:pfa:daU	e:pf	
909	ADISSADAD	Qa:dIsadad	d*	
910	ATAGJADEU	Qata:gjadOY	gj	
911	PATAIGADAU	pataIgadaU	aIg	
912	ATOÖTTADAU	Qato:9tadaU	o:9	
913	ATEUMADEU	QatOYma:daU	OYm	
914	ADISSADAU	Qa:dIsadaU	aU*	
915	ATASHADEU	QatazhadOY	zh	
916	DATARÖHTADEU	dataR2:tadOY	R2:	
917	APAKJADEU	Qapakja:daU	kj	
918	ATAPFTADAI	QatapftadaI	pft	
919	ATARPADAI	QatRpadaI	Rp	
920	DATAJOHTADEU	da:tajo:tadOY	jo:	
921	DATEEÜHTADEU	da:te:y:tadOY	e:y:	
922	ATTEMADEU	Qat@ma:daU	@m	
923	ATAPAITADEU	QatapaItadOY	paI	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
924	PATEUFADAU	patOYfa:daU	OYf	
925	ATAGLADEU	Qata:gla:daU	gl	
926	BADISSADAI	ba:dIsadaI	*b	
927	ATATSCHÜHTADEU	QatatSy:tadOY	tSy:	
928	ADÄHTSCHADAI	QadE:tSa:daI	E:tS	
929	ATAFAITADEU	QatafaItadOY	faI	
930	TZADISADAI	tsa:dizadaI	*ts	
931	ATAWWETADEU	Qatav@tadOY	v@	
932	DATARIEHTADEU	dataRi:tadOY	Ri:	
933	ATASCHEUTADEU	QataSOYtadOY	SOY	
934	ATARWADAI	QataRvadaI	Rv	
935	ATASHADEU	QatashadOY	sh	
936	DATACHAHTADEU	da:taxa:tadOY	xa:	
937	PATASCHGADAU	pataZgadaU	Zg	
938	ATADLADEU	QatadladOY	dl	
939	ATTECHADAI	Qat@CadaI	@C	
940	ADIEDADAI	Qadi:dadaI	i:d	
941	PATATZGADAU	patatsgadaU	tsg	
942	ATABÄTTADAU	QatabEtadaU	bE	
943	ATASCHLADEU	QataZladOY	Zl	
944	DATÄÖHTADEU	da:tE:2:tadOY	E:2:	
945	ATAAOTTADAU	Qata:OtadaU	a:O	
946	ADISSADAI	Qa:dIsadaI	aI*	
947	ATTERÄTTADAU	Qat6EtadaU	6E	
948	ATTEERDADEU	Qat@6da:daU	@6	
949	DATAIÄHTADEU	da:taIE:tadOY	aIE:	
950	ADÖHPADAI	Qad2:padaI	2:p	
951	ADÄSSADAI	QadEzadaI	Ez	
952	ADÜWWADAI	QadYvadaI	Yv	
953	ADEUTZADAI	QadOYtsadaI	OYts	
954	DATAWUHTADEU	da:tavu:tadOY	vu:	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
955	ATAUTTADAU	Qata UtadaU	aU	
956	ATTECHAITADEU	QatECaItadOY	CaI	
957	ATTEWADAI	Qat@vadaI	@v	
958	PATANGPFADAU	pataNpfa:daU	Npf	
959	DATAUIEHTADEU	da:taUi:tadOY	aUi:	
960	ATÄNGADEU	QatENadOY	EN	
961	DATTEEUTADEU	dat@OYtadOY	@OY	
962	ADÄSCHADAI	QadESa:daI	ES	
963	ATACHLADEU	Qataxla:daU	xl	
964	ADEUTADAI	QadOYtadaI	OYt	
965	ATAIOTTADAU	QataIOtadaU	aIO	
966	ATAPSCHADAI	QatapZadaI	pZ	
967	ATÄJADEU	QatEja:daU	Ej	
968	ATABEUTADEU	QatabOYtadOY	bOY	
969	PATÜFFADAU	patYfa:daU	Yf	
970	ATATSCHSCHADAI	QatatSSadaI	tSS	
971	PATUHFADAU	patu:fa:daU	u:f	
972	ATURRADEU	QatURadOY	UR	
973	ATÄHLADEU	QatE:ltadOY	E:l	
974	ADÜHDADAI	Qady:dadaI	y:d	
975	ATATZSADAI	QatatssadaI	tss	
976	ADÜTSCHADAI	QadYtSa:daI	YtS	
977	ATASCHATTADAU	QataZatadaU	Za	
978	DATOOAHTADEU	dato:a:tadOY	o:a:	
979	ATOHLADEU	Qato:la:daU	o:l	
980	PATATSCHPFADAU	patatSpfa:daU	tSpf	
981	ATANITTADAU	QatanItadaU	nI	
982	ATATSCHCHADAI	QatatSxadaI	tSx	
983	PATTECHTSCHADAU	patECtSa:daU	CtS	
984	DATAKIEHTADEU	da:taki:tadOY	ki:	
985	DATASCHÜHTADEU	da:taSy:tadOY	Sy:	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
986	DATTERAHTADEU	dat6a:tadOY	6a:	
987	ATTERPADAI	Qat6padaI	6p	
988	ATATZWADAI	QatatsvadaI	tsv	
989	ATÜATTADAU	Qaty:atadaU	y:a	
990	ATAPF ADAI	QatapfQadaI	pfQ	
991	ATASCHDADAI	QataSdadaI	Sd	
992	ATATSCHÄTTADAU	QatatSEtadaU	tSE	
993	ADUHSCHADAI	Qadu:Sa:daI	u:S	
994	DATAMOHTADEU	da:tamo:tadOY	mo:	
995	PATÖFFADAU	pat9fa:daU	9f	
996	ATANSCHADAI	QatanSa:daI	nS	
997	ADIETSCHADAI	Qadi:tSa:daI	i:tS	
998	ATATSCHSCHADAI	QatatSZadaI	tSZ	
999	ATIEOTTADAU	Qati:OtadaU	i:O	
1000	ATOHNGADEU	Qato:NadOY	o:N	
1001	ATAPFDADAI	QatapfdadaI	pdf	
1002	SADISADAI	sadisadaI	*s	
1003	ATTEROTTADAU	Qate6OtadaU	6O	
1004	ATAJSADAI	QatajsadaI	js	
1005	ADISSADASCH	QadIsadaZ	Z*	
1006	ATTEPADAI	Qat@padaI	@p	
1007	ATÄHJADEU	QatE:ja:daU	E:j	
1008	WADISADAI	va:dizadaI	*v	
1009	ATACHWADAI	QataxvadaI	xv	
1010	DATAIAHTADEU	da:taIa:tadOY	aIa:	
1011	ATAGNADEU	QatagnadOY	gn	
1012	PATIGGADAU	patIgadaU	Ig	
1013	ATANGCHADAI	QataNxadaI	Nx	
1014	ATANGSCHADAI	QataNZadaI	NZ	
1015	ATTECHWADAI	QatECvadaI	Cv	
1016	PATÜHFADAU	paty:fa:daU	y:f	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
1017	ATAPÖHTADEU	Qatap2:tadOY	p2:	
1018	ATTECHDADAI	QatECdadaI	Cd	
1019	ATAHMADEU	Qata:ma:daU	a:m	
1020	ADITTADAI	QadItadaI	It	
1021	ATANGADEU	QataNadOY	aN	
1022	ATARHADEU	QataRhadOY	Rh	
1023	ATASNADEU	QatasnadOY	sn	
1024	PATATSCHGADAU	patatSgadaU	tSg	
1025	ATATSCHATTADAU	QatatSatadaU	tSa	
1026	ADAUSCHADAI	QadaUZadaI	aUZ	
1027	ATTEÜTTADAU	Qat@YtadaU	@Y	
1028	ATATZBADAI	Qatatsba:daI	tsb	
1029	ATAPSADAI	QatapsadaI	ps	
1030	DATAÖHTADEU	datE2:tadOY	E2:	
1031	ATASNADEU	QataznadOY	zn	
1032	DATEEÄHTADEU	da:te:E:tadOY	e:E:	
1033	ATAGMADEU	QatagmadOY	gm	
1034	ADUPPADAI	QadUpadaI	Up	
1035	ATAPÜHTADEU	Qatapy:tadOY	py:	
1036	ATASCHUTTADAU	QataSUtadaU	SU	
1037	ATEUITTADAU	QatOYItadaU	OYI	
1038	ATABFADAU	QatabfadaU	bf	
1039	ADÖHTADAI	Qad2:tadaI	2:t	
1040	PATAHTSCHADAU	patahtSadaU	htS	
1041	ATATAUTADEU	QatataUtadOY	taU	
1042	ATATZSADAI	QatatszadaI	tsz	
1043	ATAPFTSCHADAI	QatapftSa:daI	pftS	
1044	PATOPFADAU	patOpfa:daU	Opf	
1045	ATAPFERTADEU	Qatapf6tadOY	pf6	
1046	ATADWADAI	QatadvadaI	dv	
1047	DATAOHTADEU	datao:tadOY	ao:	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
1048	ATAWÜTTADAU	QatavYtadaU	vY	
1049	ATABMADEU	QatabmadOY	bm	
1050	ATASCHSADAI	QataSzadaI	Sz	
1051	ATAMITTADAU	QatamItadaU	mI	
1052	ADÜTZADAI	QadYtsadaI	Yts	
1053	ADAHSCHADAI	Qada:Sa:daI	a:S	
1054	ADICHADAI	QadICadaI	IC	
1055	ATÜHLADEU	Qaty:la:daU	y:l	
1056	ATANGHADEU	QataNhadOY	Nh	
1057	ATUEDADEU	Qatu:@dadOY	u:@	
1058	ADAHPADAI	Qada:padaI	a:p	
1059	ATTERADEU	Qat@RadOY	@R	
1060	ADAICHADEI	QadaICadaI	aIC	
1061	ATAPFSCHADAI	QatapfZadaI	pfZ	
1062	ATTERTSCHADAI	Qat6tSa:daI	6tS	
1063	ATAGSADAI	QatagzadaI	gz	
1064	ATANGWADAI	QataNvadaI	Nv	
1065	ATAWATTADAU	QatavatadaU	va	
1066	PATATSCHTSADAU	patatStsadaU	tSts	
1067	ATTETADAI	Qat@tadaI	@t	
1068	ATADÖTTADAU	Qatad9tadaU	d9	
1069	DATAIÖHTADEU	da:taI2:tadOY	aI2:	
1070	ATTECHITTADAU	QatECItadaU	CI	
1071	ATALWADAI	Qata:lvadaI	lv	
1072	ATAGÖTTADAU	Qata:g9tadaU	g9	
1073	ATAFHADEU	QatafhadOY	fh	
1074	DATASEHTADEU	da:ta:ze:tadOY	ze:	
1075	ATAGÄTTADAU	Qata:gEtadaU	gE	
1076	ATASCHPADAI	QataSpadaI	Sp	
1077	PATAFTSADAU	pataftsadaU	fts	
1078	ATTERBADAI	Qat6ba:daI	6b	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
1079	ATÜHNGADEU	Qaty:NadOY	y:N	
1080	ADAUSADAI	QadaUzadaI	aUz	
1081	ATAWHADEU	QatavhadOY	vh	
1082	DATAPFÖHTADEU	da:tapf2:tadOY	pf2:	
1083	ADEUSADAI	QadOYzadaI	OYz	
1084	ATASPADAI	QataspadaI	sp	
1085	ATADBADAI	QatadbadaI	db	
1086	ATTESADAI	Qat@zadaI	@z	
1087	ADÜHTSCHADAI	Qady:tSa:daI	y:tS	
1088	ATADAUTATEU	QatadaUtatOY	daU	
1089	ADOWWADAI	QadOvadaI	Ov	
1090	ATALAITADEU	QatalaItadOY	laI	
1091	DATEIIEHTADEU	dataIi:tadOY	aIi:	
1092	ATTERSCHADAI	Qat6Sa:daI	6S	
1093	ATAKÄTTADAU	QatakEtadaU	kE	
1094	ATARRERTADEU	QataR6tadOY	R6	
1095	PATÖHFADAU	pat2:fa:daU	2:f	
1096	ATASCHSADAI	QataZzadaI	Zz	
1097	ADÜHCHADAI	Qady:CadaI	y:C	
1098	DATABÄHTADEU	da:tabE:tadOY	bE:	
1099	ADÖ ADAI	Qad9QadaI	9Q	
1100	DATASCHEHTADEU	dataZe:tadOY	Ze:	
1101	PATUHGADAU	patu:gadaU	u:g	
1102	ATARSADAI	QataRzadaI	Rz	
1103	ATATOTTADAU	QatatOtadaU	tO	
1104	DATASÄHTADEU	da:tazE:tadOY	zE:	
1105	PATAPFTSCHADAU	patapftSa:daU	pftS	
1106	ATEUUTTADAU	QatOYUtadaU	OYU	
1107	PATASCHKADAU	pataSkadaU	Sk	
1108	ATIENGADEU	Qati:NadOY	i:N	
1109	ATAFWADAI	QatafvadaI	fv	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
1110	ATÜÄTTADAU	QatYEtadaU	YE	
1111	ATEHERDADEU	Qa:te:6da:daU	e:6	
1112	ATAKBADAI	Qatakba:daI	kb	
1113	ATACHÜTTADAU	QataxYtadaU	xY	
1114	ADÄHBADAI	QadE:ba:daI	E:b	
1115	ATA ÜTTADAU	QataQYtadaU	QY	
1116	ATAH ADAI	QatahQadaI	hQ	
1117	ATTERÖTTADAU	Qat69tadaU	69	
1118	DATTEÄHTADEU	da:t@E:tadOY	@E:	
1119	ATASCHCHADAI	QataSxadaI	Sx	
1120	ATAPÖTTADAU	Qatap9tadaU	p9	
1121	ATUNGAEU	QatUNadOY	UN	
1122	DATÜEHTADEU	daty:e:tadOY	y:e:	
1123	ATASCHBADAI	QataSba:daI	Sb	
1124	PATASTSCHADAU	patastSa:daU	stS	
1125	ATAGDADAI	QatagdadaI	gd	
1126	ADISSADAF	Qa:dIsadaf	f*	
1127	ADAUSCHADAI	QadaUSa:daI	aUS	
1128	DATAKUHTADEU	da:taku:tadOY	ku:	
1129	PATANGFADAU	pataNfa:daU	Nf	
1130	DATADÖHTADEU	da:tad2:tadOY	d2:	
1131	ATABOTTADAU	QatabOtadaU	bO	
1132	ATOOATTADAU	Qato:atadaU	o:a	
1133	PATARKADAU	pataRkadaU	Rk	
1134	DATTEAHTADEU	da:t@a:tadOY	@a:	
1135	ATTECHOTTADAU	QatECOtadaU	CO	
1136	DATÖÄHTADEU	dat2:E:tadOY	2:E:	
1137	PATUGGADAU	patUgadaU	Ug	
1138	ATAJÜTTADAU	QatajYtadaU	jY	
1139	PATTERKADAU	pat6kadaU	6k	
1140	ATAMATTADAU	QatamatadaU	ma	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
1141	ATAGTADAI	QatagtadaI	gt	
1142	ADISSADAR	QadIsadaR	R*	
1143	ATABRADEU	QatabRadOY	bR	
1144	ATTECHMADEU	QatECma:daU	Cm	
1145	ATACHUTTADAU	QataxUtadaU	xU	
1146	ADEEDADAI	Qade:dadaI	e:d	
1147	ATÖEDADEU	Qat2:@dadOY	2:@	
1148	ATAPFOTTADAU	QatapfOtadaU	pfO	
1149	DATASEHTADEU	datase:tadOY	se:	
1150	ADISSADAJ	Qa:dIsadaj	j*	
1151	ATACHBADAI	Qataxba:daI	xb	
1152	ATAMHADEU	QatamhadOY	mh	
1153	DATTECHÖHTADEU	da:tEC2:tadOY	C2:	
1154	ATAHAUTADEU	QatahaUtadOY	haU	
1155	PATASTSADAU	patastsadaU	sts	
1156	DATANÖHTADEU	da:tan2:tadOY	n2:	
1157	DATAJUHTADEU	da:taju:tadOY	ju:	
1158	ATADOTTADAU	QatadOtadaU	dO	
1159	ATÖHJADEU	Qat2:ja:daU	2:j	
1160	DATTECHEHTADEU	da:tECe:tadOY	Ce:	
1161	ATAJEUTADEU	QatajOYtadOY	jOY	
1162	ATAFPADAI	QatafpadaI	fp	
1163	DATAUUHTADEU	da:taUu:tadOY	aUu:	
1164	PATAPFTSADAU	patapftsadaU	pfts	
1165	APADTSADAU	QapadtsadaU	dts	
1166	ATTEBADAI	Qat@ba:daI	@b	
1167	ATASCHETADEU	QataS@tadOY	S@	
1168	ATALJADEU	Qata:lja:daU	lj	
1169	ADÖHWADAI	Qad2:vadaI	2:v	
1170	DATÄOHTADEU	da:tEo:tadOY	Eo:	
1171	ATÖHNGADEU	Qat2:NadOY	2:N	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
1172	ATASÜTTADAU	QatazYtadaU	zY	
1173	ATAF ADAI	QatafQadaI	fQ	
1174	ADÜHTADAI	Qady:tadaI	y:t	
1175	ATÖNGADEU	Qat9NadOY	9N	
1176	ATALCHADAI	QatalxadaI	lx	
1177	ADÜH ADAI	Qady:QadaI	y:Q	
1178	ATEIITTADAU	QataItadaU	aI	
1179	ATAJITTADAU	QatajItadaU	jI	
1180	ATALÄTTADAU	QatalEtadaU	lE	
1181	ADÄTSCHADAI	QadEtSadaI	EtS	
1182	DATALUHTADEU	data:lu:tadOY	lu:	
1183	ATIEÜTTADAU	Qati:YtadaU	i:Y	
1184	ADUHTSCHADAI	Qadu:tSa:daI	u:tS	
1185	ATATWADAI	Qata:tvadaI	tv	
1186	DATEEUHTADEU	da:te:u:tadOY	e:u:	
1187	PATACHTSADAU	pataxtsadaU	xts	
1188	ATAPATTADAU	QatapatadaU	pa	
1189	ATANÖTTADAU	Qatan9tadaU	n9	
1190	PATTERPFADAU	pat6pfa:daU	6pf	
1191	ATAUUTTADAU	QataUUtadaU	aUU	
1192	DATUEHTADEU	datu:e:tadOY	u:e:	
1193	ATARLADEU	QataRladOY	Rl	
1194	DATAJÖHTADEU	da:taj2:tadOY	j2:	
1195	ATAPÜTTADAU	QatapYtadaU	pY	
1196	ATADDADAI	QatadadaI	ad	
1197	ATA ÜHTADEU	QataQy:tadOY	Qy:	
1198	ADISSADAI	Qa:dIsadaI	*Q	
1199	ATAWBADAI	Qatavba:daI	vb	
1200	ADISSADDE	QadIsadE	E*	
1201	ATANGAUTADEU	QataNaUtadOY	NaU	
1202	DATACHOHTADEU	dataxo:htadOY	xo:	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
1203	ATABJADEU	QatabjadOY	bj	
1204	ATÜITTADAU	Qaty:ItadaU	y:I	
1205	ATAKOTTADAU	QatakOtadaU	kO	
1206	DATÄIEHTADEU	datE:i:tadOY	E:i:	
1207	ATAUMADEU	QataUma:daU	aUm	
1208	ATIELADEU	Qati:la:daU	i:l	
1209	ATADDERTADEU	Qatad6tadOY	d6	
1210	ATASSERTADEU	Qatas6tadOY	s6	
1211	ADOHPADAI	Qado:padaI	o:p	
1212	DATTEIEHTADEU	dat@i:tadOY	@i:	
1213	DATÄEHTADEU	datE:e:tadOY	E:e:	
1214	ATUERDADEU	Qatu:6dadOY	u:6	
1215	DATIEÖHTADEU	dati:2:tadOY	i:2:	
1216	ATANGSCHADAI	QataNSa:daI	NS	
1217	ATAWSADAI	QatavzadaI	vz	
1218	ATTÖITTADAU	Qat9ItadaU	9I	
1219	DATAJIEHTADEU	da:taji:tadOY	ji:	
1220	APADPFADAU	QapadpfadaU	dpf	
1221	ADOHSCHADAI	Qado:ZadaI	o:Z	
1222	ATAJBADAI	Qatajba:daI	jb	
1223	ATALMADEU	Qatalma:daU	lm	
1224	ADÖDDADAI	Qad9dadaI	9d	
1225	ATAWTADAI	QatavtadaI	vt	
1226	ATANNADEU	QatanadOY	an	
1227	ATATSCHEHTADEU	QatatSe:tadOY	tSe:	
1228	DATTECHUHTADEU	da:tECu:tadOY	Cu:	
1229	ATATSADAI	Qata:tzadaI	tz	
1230	ATTEDADAI	Qat@dadaI	@d	
1231	ATÖHATTADAU	Qat2:atadaU	2:a	
1232	ATUHCHADEU	Qatu:xadOY	u:x	
1233	ATASCHÄTTADAU	QataZEtadaU	ZE	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
1234	PATAJTSCHADAU	patajtSa:daU	jtS	
1235	ATAHLADEU	QatahlaOY	hl	
1236	ATONNADEU	QatOnadOY	On	
1237	ATAPDADAI	QatapdadaI	pd	
1238	ATAMAUTADEU	QatamaUtadOY	maU	
1239	APAKTSCHADAU	QapaktSa:daU	ktS	
1240	ATASCHAITADEU	QataSaltadOY	SaI	
1241	ATANGÄTTADAU	QataNEtadaU	NE	
1242	ATASMADEU	QatazmadOY	zm	
1243	ATASCHPADAI	QataZpadaI	Zp	
1244	PATTECGTSADAU	pat@CtsadaU	Cts	
1245	ATALSCHADAI	QatalZadaI	lZ	
1246	ATADPADAI	QatadpadaI	dp	
1247	ATARITTADAU	QataRItadaU	RI	
1248	DATÄIEHTADEU	da:tEi:tadOY	Ei:	
1249	DATANGÄHTADEU	dataNE:tadOY	NE:	
1250	ATTERTZADAI	Qat6tsadaI	6ts	
1251	DATÄOHTADEU	datE:o:tadOY	E:o:	
1252	PATÄCKADAU	patEkadaU	Ek	
1253	DATIEEHTADEU	dati:e:tadOY	i:e:	
1254	ADÖHSADAI	Qad2:sadaI	2:s	
1255	DATAWÖHTADEU	da:tav2:tadOY	v2:	
1256	ATAPFUTTADAU	QatapfUtadaU	pfU	
1257	ATANGDADAI	QataNdadaI	Nd	
1258	ATÜUTTADAU	Qaty:UtadaU	y:U	
1259	ATADEUTATAU	QatadOYtataU	dOY	
1260	PATAMKADAU	patamkadaU	mk	
1261	PATAFTSCHADAU	pataftSa:daU	ftS	
1262	ATARAUTADEU	QataRaUtadOY	RaU	
1263	ADÜSADAI	QadYzadaI	Yz	
1264	DATAGÖHTADEU	da:ta:g2:tadOY	g2:	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
1265	ADISSADAL	Qa:dIsada:l	l*	
1266	ATADNADEU	QatadnadOY	dn	
1267	DATAROHTADEU	dataRo:tadOY	Ro:	
1268	PATÖHGADAU	pat2:gadaU	2:g	
1269	ATALPADAI	QatalpadaI	lp	
1270	ATABPFADAU	QatabpfadaU	bpf	
1271	ATAUHADEU	QataUhadOY	aUh	
1272	ATATSCHADAI	QatatZadaI	tZ	
1273	ATTERUTTADAU	Qat6UtadaU	6U	
1274	ATTÖOTTADAU	Qat9OtadaU	9O	
1275	ATTECHÄTTADAU	QatECEtadaU	CE	
1276	DATAACHEHTADEU	da:taxe:tadOY	xe:	
1277	ADOHSADAI	Qado:sadaI	o:s	
1278	DATASCHÄHTADEU	dataZE:tadOY	ZE:	
1279	ATATZDADAI	QatatsdadaI	tsd	
1280	ATÜERDADEU	QatY6da:daU	Y6	
1281	ATEEÖTTADAU	Qa:te:9tadaU	e:9	
1282	ATÜRRADEU	QatYRadOY	YR	
1283	DATÄÜHTADEU	da:tE:y:tadOY	E:y:	
1284	ATAHNADEU	QatahnadOY	hn	
1285	NADISADAI	na:dizadaI	*n	
1286	ADISSADAS	QadIsadaz	z*	
1287	ATATSCHBADAI	QatatSba:daI	tSb	
1288	ATAGBADAI	QatagbadaI	gb	
1289	ATAL ADAI	QatalQadaI	lQ	
1290	ATASOTTADAU	QatasOtadaU	sO	
1291	PATAWTSADAU	patavtsadaU	vts	
1292	ATAUÖTTADAU	QataU9tadaU	aU9	
1293	ATASSCHADAI	QatasSa:daI	sS	
1294	ATAMBADAI	Qatamba:daI	mb	
1295	DATTERIEHTADEU	dat6i:tadOY	6i:	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
1296	ADATTADAI	QadatadaI	at	
1297	ATAHADEU	Qata:hadOY	a:h	
1298	ATAIRADEU	QataIRadOY	aIR	
1299	DATUIETADEU	datu:i:tadOY	u:i:	
1300	ATADCHADAI	QatadxadaI	dx	
1301	ATTERJADEU	Qat6ja:daU	6j	
1302	ADUHWADAI	Qadu:vadaI	u:v	
1303	PATAHPFADAU	pata:pfa:daU	a:pf	
1304	ATACHSADAI	QataxzadaI	xz	
1305	ATAJOTTADAU	QatajOtadaU	jO	
1306	DATEUEHTADEU	datOYe:tadOY	OYe:	
1307	DATANAHTADEU	da:tana:tadOY	na:	
1308	DATADIEHTADEU	da:tadi:tadOY	di:	
1309	PATAPFGADAU	patapfgadaU	pfg	
1310	ATATZRADEU	QatatsRadOY	tsR	
1311	ATIEHADEU	Qati:hadOY	i:h	
1312	DATAUÜHTADEU	da:taUy:tadOY	aUy:	
1313	ATACHAUTADEU	QataxaUtadOY	xaU	
1314	DATASCHEHTADEU	da:taSe:tadOY	Se:	
1315	DATASÖHTADEU	da:taz2:tadOY	z2:	
1316	ADAU ADAI	QadaUQadaI	aUQ	
1317	ADISSADÜH	Qa:dIsady:	y:*	
1318	ATATSCHPADAI	QatatSpadaI	tSp	
1319	ADISSADAT	Qa:dIsada:t	t*	
1320	DATEUUHTADEU	da:tOYu:tadOY	OYu:	
1321	ATATZ ADAI	QatatsQadaI	tsQ	
1322	ATAWOTTADAU	QataVotadaU	vO	
1323	ATTENADEU	Qat@nadOY	@n	
1324	DATANGUHTADEU	dataNu:tadOY	Nu:	
1325	ATAWEUTADEU	QataVOYtadOY	vOY	
1326	ATATSCHÖTTADAU	QatatS9tadaU	tS9	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
1327	ATANEUTADEU	QatanOYtadOY	nOY	
1328	ATASSADAI	Qataszadai	sz	
1329	ATAFLADEU	Qatafla:daU	fl	
1330	ATASLADEU	QatazladOY	zl	
1331	ATALHADEU	Qata:lhadaOY	lh	
1332	ADAISADEU	QadaIzadOY	aIz	
1333	DATTECHÄHTADEU	da:tECE:tadOY	CE:	
1334	ATASSCHADAI	QatazSadai	zS	
1335	ADÜDDADAI	QadYdadaI	Yd	
1336	ATAWÖTTADAU	Qatav9tadaU	v9	
1337	ATAMOTTADAU	QatamOtadaU	mO	
1338	ATANAUTADEU	QatanaUtadOY	naU	
1339	ADISSADATZ	Qa:dIsada:ts	ts*	
1340	ATAWSCHADAI	QatavZadai	vZ	
1341	DATASIEHTADEU	datasi:tadOY	si:	
1342	ATALITTADAU	QatalItadaU	II	
1343	ATAJTADAI	QatajtadaI	jt	
1344	ADUWWADAI	QadUvadaI	Uv	
1345	ATAPKADAU	QatapkadaU	pk	
1346	DATAACHÄHTADEU	da:taxE:tadOY	xE:	
1347	ATÜUTTADAU	QatYUtadaU	YU	
1348	ADUHDADAI	Qadu:dadaI	u:d	
1349	ADÜHSCHADAI	Qady:Sa:daI	y:S	
1350	DATASCHIEHTADEU	da:taSi:tadOY	Si:	
1351	PATARTSCHADAU	pataRtSadaU	RtS	
1352	ADÜHSCHADAI	Qady:Zadai	y:Z	
1353	ATAHLADEU	Qata:la:daU	a:l	
1354	ATASCHNGADEU	QataZNadOY	ZN	
1355	ATAFEUTADEU	QatafOYtadOY	fOY	
1356	DATÜÄHTADEU	daty:E:tadOY	y:E:	
1357	ATALSADAI	Qatalsadai	ls	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
1358	ATATPADAI	Qata:tpadaI	tp	
1359	ATEUÜTTADAU	QatOYYtadaU	OYY	
1360	DATTECHÜHTADEU	da:tECy:tadOY	Cy:	
1361	ADEESADAI	Qade:sadaI	e:s	
1362	ATA ITTADAU	QataQItadaU	QI	
1363	ATACHEUTADEU	QataxOYtadOY	xOY	
1364	ATOHAEU	QatOhadOY	Oh	
1365	ADUHSADAI	Qadu:sadaI	u:s	
1366	ATAPSCHADAI	QatapSa:daI	pS	
1367	ATASUTTADAU	QatazUtadaU	zU	
1368	ADEU ADAI	QadOYQadaI	OYQ	
1369	ATABUTTADAU	QatabUtadaU	bU	
1370	PATAHFADAU	pata:fa:daU	a:f	
1371	ATAJATTADAU	QatajatadaU	ja	
1372	ADÜSCHADAI	QadYZadaI	YZ	
1373	ATAFJAEU	Qatafja:daU	fj	
1374	ATÜHAEU	Qaty:hadOY	y:h	
1375	ATTETZADAI	Qat@tsadaI	@ts	
1376	ATÄRRADEU	QatERadOY	ER	
1377	ATOOEDAEU	Qato:@dadOY	o:@	
1378	ADEUPADAI	QadOYpadaI	OYp	
1379	ATIJADEU	QatljadOY	Ij	
1380	ADÄSCHADAI	QadEZadaI	EZ	
1381	ADEESADAI	Qade:zadaI	e:z	
1382	DATABÜHTADEU	da:taby:tadOY	by:	
1383	ATTERNGAEU	Qat6NadOY	6N	
1384	ADISSADAS	Qa:dIsadas	s*	
1385	ATATSCHIEHTADEU	QatatSi:tadOY	tSi:	
1386	ATASATTADAU	QatazatadaU	za	
1387	ADASSADAI	QadasadaI	as	
1388	ADOSCHADAI	QadOZadaI	OZ	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
1389	DATÖÜHTADEU	dat2:y:tadOY	2:y:	
1390	ATANTADAI	QatantadaI	nt	
1391	ATAS ADAI	QatazQadaI	zQ	
1392	ADAUDADAI	QadaUdadaI	aUd	
1393	ATASPADAI	QatazpadaI	zp	
1394	ATAWSADAI	QatavsadaI	vs	
1395	ATATZLADEU	Qatatsla:daU	tsl	
1396	DATAAÖHTADEU	da:ta:2:tadOY	a:2:	
1397	PATIEPFADAU	pati:pfa:daU	i:pf	
1398	ATEEHADEU	Qa:te:hadOY	e:h	
1399	ADÜHBADAI	Qady:ba:daI	y:b	
1400	DATEUAHTADEU	da:tOYa:tadOY	OYa:	
1401	ATACHMADEU	Qataxma:daU	xm	
1402	ATAJAUTADEU	QatajaUtadOY	jaU	
1403	PATAWTSCHADAU	patavtSa:daU	vtS	
1404	ADAHDADAI	Qada:dadaI	a:d	
1405	DATABOHTADEU	da:tabo:tadOY	bo:	
1406	PATANGTSCHADAU	pataNtSa:daU	NtS	
1407	ATOEDADEU	QatO@dadOY	O@	
1408	DATAIUHTADEU	da:taIu:tadOY	aIu:	
1409	ATINNADEU	Qa:tInadOY	In	
1410	ATÜHMADEU	Qaty:ma:daU	y:m	
1411	HADISADAI	ha:dizadaI	*h	
1412	PATTEFADAU	pat@fa:daU	@f	
1413	PATÖGGADAU	pat9gadaU	9g	
1414	ADÖHSCHADAI	Qad2:ZadaI	2:Z	
1415	APAKSADAI	QapakzadaI	kz	
1416	ATABTADAI	QatabtadaI	bt	
1417	PATATKADAU	pata:tkadaU	tk	
1418	PATASFADAU	patazfadaU	zf	
1419	ATATZHADEU	QatatshadOY	tsh	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
1420	ADEUDADAI	QadOYdadaI	OYd	
1421	ATASAITADEU	QatasaItadOY	saI	
1422	ATARJADEU	QataRjadOY	Rj	
1423	ADASCHADAI	QadaZadaI	aZ	
1424	ATAMDADAI	QatamdadaI	md	
1425	PADISSADAI	pa:dIsadaI	*p	
1426	ATABAITADEU	QatabaItadOY	baI	
1427	ADUHBADAI	Qadu:ba:daI	u:b	
1428	ADÄTZADAI	QadEtsadaI	Ets	
1429	ATANMADEU	Qatanma:daU	nm	
1430	ATAPOHTADEU	Qatapo:tadOY	po:	
1431	ATATZUTTADAU	QatatsUtadaU	tsU	
1432	ATAWAITADEU	QatavaItadOY	vaI	
1433	APAKNADEU	QapaknadOY	kn	
1434	ATASCHTADAI	QataZtadaI	Zt	
1435	ATÜEDADEU	Qaty:@dadOY	y:@	
1436	ATAPEUTADEU	QatapOYtadOY	pOY	
1437	ATAJSCHADAI	QatajZadaI	jZ	
1438	ATÄHADEU	QatEhadOY	Eh	
1439	ADÜHSADAI	Qady:sadaI	y:s	
1440	PATAWFADAU	patavfa:daU	vf	
1441	ATAFBADAI	Qatafba:daI	fb	
1442	DATTEREHTADEU	dat6e:tadOY	6e:	
1443	ATUOTTADAU	Qatu:OtadaU	u:O	
1444	ATORRADEU	QatORadOY	OR	
1445	ATALÖTTADAU	Qatal9tadaU	l9	
1446	ATARCHADAI	QataRxadaI	Rx	
1447	ATA UHTADEU	QataQu:tadOY	Qu:	
1448	DATAFÖHTADEU	da:taf2:tadOY	f2:	
1449	DATANIEHTADEU	da:tani:tadOY	ni:	
1450	ATÖMMADEU	Qat9ma:daU	9m	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
1451	ATÄHÖTTADAU	QatE:9tadaU	E:9	
1452	PATASCHTSCHADAU	pataStSa:daU	StS	
1453	PATAUGADAU	pataUgadaU	aUg	
1454	ATAMÜTTADAU	QatamYtadaU	mY	
1455	DATAGÄHTADEU	da:ta:gE:tadOY	gE:	
1456	ATATLADEU	Qata:tla:daU	tl	
1457	ATÄHNGADEU	QatE:NadOY	E:N	
1458	PATTECHKADAU	patECkadaU	Ck	
1459	DATADÜHTADEU	da:tady:tadOY	dy:	
1460	ATEUÖTTADAU	QatOY9tadaU	OY9	
1461	ATATÄTTADAU	QatatEtadaU	tE	
1462	ATABKADAU	QatabkadaU	bk	
1463	ADISSADAN	Qa:dIsada:n	n*	
1464	ADAITSCHADAI	QadaItSa:daI	aItS	
1465	PATATPFADAU	pata:tpfa:daU	tpf	
1466	ATEUHADEU	QatOYhadOY	OYh	
1467	ATAPSADAI	QatapzadaI	pz	
1468	DATAKÜHTADEU	da:taky:tadOY	ky:	
1469	PATÜHPFADAU	paty:pfa:daU	y:pf	
1470	ATASMADEU	Qatasma:daU	sm	
1471	PATIEGADAU	pati:gadaU	i:g	
1472	DATAMÖHTADEU	da:tam2:tadOY	m2:	
1473	ATTERNADEU	Qat6nadOY	6n	
1474	DATAHIEHTADEU	da:tahi:tadOY	hi:	
1475	ATATNADEU	Qata:tnadOY	tn	
1476	ATANNERTADEU	Qatan6tadOY	n6	
1477	ATASCHOTTADAU	QataSOtadaU	SO	
1478	ATALBADAI	Qatalba:daI	lb	
1479	ATAPFÜTTADAU	QatapfYtadaU	pfY	
1480	ATTERMADEU	Qat6ma:daU	6m	
1481	ATASCHJADEU	QataZjadOY	Zj	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
1482	APADGADAU	QapadgadaU	dg	
1483	ATARNADEU	QataRnadOY	Rn	
1484	ATOMMADEU	QatOmadOY	Om	
1485	ATAPFNADEU	QatapfnadOY	pfn	
1486	PATTECHPFADAU	patECpfa:daU	Cpf	
1487	ATATZÖTTADAU	Qatats9tadaU	ts9	
1488	ADIWWADAI	QadIvadaI	Iv	
1489	ATASAUTADEU	QatasaUtadOY	saU	
1490	DATAJAHTADEU	da:taja:tadOY	ja:	
1491	DATATZÜHTADEU	datatsy:tadOY	tsy:	
1492	ATANHADEU	QatanhadOY	nh	
1493	ATATSCHOHTADEU	QatatSo:tadOY	tSo:	
1494	DATAUHTADEU	datau:tadOY	au:	
1495	ATAJPADAI	QatajpadaI	jp	
1496	PATAJFADAU	patajfa:daU	jf	
1497	ATAWAUTADEU	QatavaUtadOY	vaU	
1498	ADAHBADAI	Qada:ba:daI	a:b	
1499	ATASCHADAI	QatazxadaI	zx	
1500	ATAFDADAI	QatafdadaI	fd	
1501	ATADRADEU	QatadRadOY	dR	
1502	ATAAÜTTADAU	Qata:YtadaU	a:Y	
1503	ATOOITTADAU	Qato:ItadaU	o:I	
1504	PATASKADAU	patazkadaU	zk	
1505	DATANGEHTADEU	dataNe:tadOY	Ne:	
1506	ATALSADAI	QatalzadaI	lz	
1507	PATASGADAU	patasgadaU	sg	
1508	PATAHKADAU	pata:kadaU	a:k	
1509	ATA ERTANEU	QataQ6tanOY	Q6	
1510	ATAMSCHADAI	QatamZadaI	mZ	
1511	ADASADAI	QadazadaI	az	
1512	ATTERITTADAU	Qate6ItadaU	6I	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
1513	ATAP ADAI	QatapQadaI	pQ	
1514	ATASCHÜTTADAU	QataSYtadaU	SY	
1515	ADISSADAH	Qa:dIsada:	a:*	
1516	ATEUJADEU	QatOYja:daU	OYj	
1517	ADISSADAK	Qa:dIsadak	k*	
1518	ADUSCHADAI	QadUSa:daI	US	
1519	PATAGKADAU	patagkadaU	gk	
1520	PATAMPFADAU	patampfa:daU	mpf	
1521	ATATSCHUHTADEU	QatatSu:tadOY	tSu:	
1522	ATOOÄTTADAU	Qato:EtadaU	o:E	
1523	ATEEOTTADAU	Qa:te:OtadaU	e:O	
1524	ATOOERDADEU	Qato:6dadOY	o:6	
1525	ATADAITATEU	QatadaItatOY	daI	
1526	ATTÖUTTADAU	Qat9UtadaU	9U	
1527	ATACH ADAI	QataxQadaI	xQ	
1528	ATATZAUTADEU	QatatsaUtadOY	tsaU	
1529	ATANWADAI	QatanvadaI	nv	
1530	ATAUÄTTADAU	QataUEtadaU	aUE	
1531	ADISSADDO	QadIsadO	O*	
1532	ATÜHNADEU	Qaty:nadOY	y:n	
1533	DATAHEHTADEU	datahe:tadOY	he:	
1534	ATALAUTADEU	QatalaUtadOY	laU	
1535	ATATZITTADAU	QatatsItadaU	tsI	
1536	ATASCHADAI	QatasxadaI	sx	
1537	DATAMAHTADEU	da:tama:tadOY	ma:	
1538	ATATZERTADEU	Qatats6tadOY	ts6	
1539	ATUJADEU	QatUja:daU	Uj	
1540	ADÖHTZADAI	Qad2:tsadaI	2:ts	
1541	ATIEMADEU	Qati:ma:daU	i:m	
1542	PATALTSCHADAU	pataltsa:daU	ltS	
1543	DATANGOHTADEU	dataNo:tadOY	No:	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
1544	ATABÜTTADAU	QatabYtadaU	bY	
1545	PATAWKADAU	patavkadaU	vk	
1546	DATTEÜHTADEU	da:t@y:tadOY	@y:	
1547	PFADISADAI	pfa:dizadaI	*pf	
1548	DATAFÄHTADEU	da:tafE:tadOY	fE:	
1549	ATABPADAI	QatabpadaI	bp	
1550	ATASJADEU	Qatasja:daU	sj	
1551	ADISSADOH	Qa:dIsado:	o:*	
1552	ADIETZADAI	Qadi:tsadaI	i:ts	
1553	DATABAHTADEU	da:taba:tadOY	ba:	
1554	ATA ÄHTADEU	QataQE:tadOY	QE:	
1555	ATILLADEU	QatIla:daU	Il	
1556	ATAPFPADAI	QatapfpadaI	pfp	
1557	ATTEÖTTADAU	Qat@9tadaU	@9	
1558	ATÄUTTADAU	QatEUtadaU	EU	
1559	PATATZTSCHADAU	patatstSa:daU	tstS	
1560	ATUHMADEU	Qatu:ma:daU	u:m	
1561	DATAIÜHTADEU	da:taIy:tadOY	aIy:	
1562	PATAIPFADAU	pataIpfadaU	aIpf	
1563	ATASCHDADAI	QataZdadaI	Zd	
1564	ATAAÄTTADAU	Qata:EtadaU	a:E	
1565	ATTÖÄTTADAU	Qat9EtadaU	9E	
1566	PATIFFADAU	patIfa:daU	If	
1567	DATATÄHTADEU	datatE:tadOY	tE:	
1568	ADOSCHADAI	QadOSa:daI	OS	
1569	ATAFSADAI	QatafzadaI	fz	
1570	ATEENADEU	Qa:te:nadOY	e:n	
1571	DATÜÖHTADEU	daty:2:tadOY	y:2:	
1572	ATEUÄTTADAU	QatOYEtadaU	OYE	
1573	ATACKETADEU	Qatak@tadOY	k@	
1574	ATAN ADAI	QatanQadaI	nQ	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
1575	PATAGPFADAU	patagpfadaU	gpf	
1576	DATAREHTADEU	dataRe:tadOY	Re:	
1577	PATEUKADAU	patOYkadaU	OYk	
1578	ATAJAITADEU	QatajaItadOY	jaI	
1579	ADEEPADAI	Qade:padaI	e:p	
1580	DATAKÄHTADEU	da:takE:tadOY	kE:	
1581	ADEE ADAI	Qade:QadaI	e:Q	
1582	DATATZAHTADEU	datatsa:tadOY	tsa:	
1583	ADISSADDÜ	QadIsadY	Y*	
1584	ATASSETADEU	Qatas@tadOY	s@	
1585	ADU ADAI	QadUQadaI	UQ	
1586	ATASCH ADAI	QataZQadaI	ZQ	
1587	PATAIFADAU	pataIfa:daU	aIf	
1588	DATAFEHTADEU	da:tafe:tadOY	fe:	
1589	ATAKITTADAU	QatakItadaU	kI	
1590	ATÄLLADEU	QatEla:daU	El	
1591	ADÄHSCHADAI	QadE:Sa:daI	E:S	
1592	ATAPFMADEU	Qatapfma:daU	pfm	
1593	PATÄGGADAU	patEgadaU	Eg	
1594	ATÄEDAUEU	QatE:@da:daU	E:@	
1595	APADTSCHADAU	QapadtSadaU	dtS	
1596	APAKTSADAU	QapaktsadaU	kts	
1597	ATA ATTADAU	QataQatadaU	Qa	
1598	ATAMEUTADEU	QatamOYtadOY	mOY	
1599	PATAPFADAU	patapfa:daU	apf	
1600	ATANNETADEU	Qatan@tadOY	n@	
1601	DATARÄHTADEU	dataRE:tadOY	RE:	
1602	PATAHGADAU	pata:gadaU	a:g	
1603	ATASCHMADEU	QataZmadOY	Zm	
1604	ATARSCHADAI	QataRZadaI	RZ	
1605	ATACHÄTTADAU	QataxEtadaU	xE	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
1606	ATTEREDADEU	Qat6@dadOY	6@	
1607	ADÄH ADAI	QadE:QadaI	E:Q	
1608	PATTEPFADAU	pat@pfa:daU	@pf	
1609	DATAAOHTADEU	da:ta:o:tadOY	a:o:	
1610	ADIEPADAI	Qadi:ptadaI	i:p	
1611	DATUÖHTADEU	datu:2:tadOY	u:2:	
1612	ADÄHSCHADAI	QadE:ZadaI	E:Z	
1613	ATTERHADEU	Qat6hadOY	6h	
1614	ATUHNADEU	Qatu:nadOY	u:n	
1615	DATÜAHTADEU	daty:a:tadOY	y:a:	
1616	ATADUTTADAU	QatadUtadaU	dU	
1617	ATUÜTTADAU	Qatu:YtadaU	u:Y	
1618	PATASCHPFADAU	pataZpfadaU	Zpf	
1619	DATASCHÖHTADEU	da:taS2:tadOY	S2:	
1620	DATAAIETADEU	da:ta:i:tadOY	a:i:	
1621	ATASTADAI	QatastadaI	st	
1622	ATAJSADAI	QatajzadaI	jz	
1623	ADAUTSCHADAI	QadaUtSa:daI	aUtS	
1624	ATTECHJADEU	QataCja:daU	Cj	
1625	ADÄHTADAI	QadE:tadaI	E:t	
1626	ATASCHSADAI	QataSsadaI	Ss	
1627	ATANSADAI	QatanzadaI	nz	
1628	DATASCHOHTADEU	da:taSo:tadOY	So:	
1629	ATAHEUTADEU	QatahOYtadOY	hOY	
1630	ADITSCHADAI	QadItSa:daI	ItS	
1631	ATALTADAI	QataltadaI	lt	
1632	ATÜERDADEU	Qaty:6dadOY	y:6	
1633	ATUERDADEU	QatU6dadOY	U6	
1634	ATAGCHADAI	QatagxadaI	gx	
1635	ATAAÖTTADAU	Qata:9tadaU	a:9	
1636	ATTECHETADEU	QatEC@tadOY	C@	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
1637	DATAAEHTADEU	data:e:tadOY	a:e:	
1638	ADÖSSADAI	Qad9zadaI	9z	
1639	DATAFUHTADEU	da:tafu:tadOY	fu:	
1640	ATABLADEU	QatQabladOY	bl	
1641	ATAS ADAI	QatasQadaI	sQ	
1642	ATACHERTADEU	Qatax6tadOY	x6	
1643	APAKFADAU	Qapakfa:daU	kf	
1644	ATINGADEU	QatINda:daU	IN	
1645	ADA ADAI	QadaQadaI	aQ	
1646	ATEUERDADEU	QatOY6da:daU	OY6	
1647	PATANPFADAU	patanpfa:daU	npf	
1648	ATAPFWADAI	QatapfvadaI	pfv	
1649	ADOHTADAI	Qado:tadaI	o:t	
1650	PATATSCHFADAU	patatSfa:daU	tSf	
1651	DATAMUHTADEU	da:tamu:tadOY	mu:	
1652	ATARBADAI	QataRbadaI	Rb	
1653	PATÖPFADAU	pat9pfa:daU	9pf	
1654	ADISSADASCH	Qa:dIsadaS	S*	
1655	ATANÄTTADAU	QatanEtadaU	nE	
1656	PATTECHGADAU	patECgadaU	Cg	
1657	ADUBBADAI	QadUba:daI	Ub	
1658	ADOBBADAI	QadOba:daI	Ob	
1659	ATASAITADEU	QatazaItadOY	zaI	
1660	DATÖOHTADEU	dat2:o:tadOY	2:o:	
1661	ATARRADEU	QataRadOY	aR	
1662	ATALLERTADEU	Qatal6tadOY	l6	
1663	ATAJMADEU	Qatajma:daU	jm	
1664	PATANFADAU	patanfa:daU	nf	
1665	PATÖHKADAU	pat2:kadaU	2:k	
1666	DATTECHIEHTADEU	da:tECi:tadOY	Ci:	
1667	ATALNADEU	QatalnadOY	ln	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
1668	ATTECHSCHADAI	QatECSadaI	CS	
1669	ATANGOTTADAU	QataNOtadaU	NO	
1670	ADIESCHADAI	Qadi:Sa:daI	i:S	
1671	ATATSCHÄHTADEU	QatatSE:tadOY	tSE:	
1672	ATTECHSCHADAI	QatECZadaI	CZ	
1673	ATEUNADEU	QatOYnadOY	OYn	
1674	ATASSCHADAI	QatasZadaI	sZ	
1675	PATAUPFADAU	pataUpfa:daU	aUpf	
1676	ATABAUTADEU	QatabaUtadOY	baU	
1677	DATALOHTADEU	datalo:tadOY	lo:	
1678	DATASUHTADEU	da:tazu:tadOY	zu:	
1679	DATUÜHTADEU	datu:y:tadOY	u:y:	
1680	ATABITTADAU	QatabItadaU	bI	
1681	ATACHNGADEU	QataxNadOY	xN	
1682	ATASCHÖTTADAU	QataS9tadaU	S9	
1683	ADISSADAPF	Qa:dIsadapf	pf*	
1684	ATÖITTADAU	Qat2:ItadaU	2:I	
1685	ATAPPERTADEU	Qatap6tadOY	p6	
1686	ATATSCHTADAI	QatatStadaI	tSt	
1687	ADÜHTZADAI	Qady:tsadaI	y:ts	
1688	ATAMTADAI	QatamtadaI	mt	
1689	ATAINGADEU	QataINadOY	aIN	
1690	DATATUHTADEU	datatu:tadOY	tu:	
1691	ATAWWERTADEU	Qatav6tadOY	v6	
1692	PATEWCHADAI	pa:t@vCadaI	vC	
1693	ATACHTADAI	QataxtadaI	xt	
1694	ATÖÖTTADAU	Qat2:9tadaU	2:9	
1695	ATASCHERTADEU	QataZ6tadOY	Z6	
1696	ADAIDADAU	QadaIdadaU	aId	
1697	ATATSCHSADAI	QatatSzadaI	tSz	
1698	DATACHÖHTADEU	da:tax2:tadOY	x2:	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
1699	ATADSADAI	QatadsadaI	ds	
1700	DATASCHÄHTADEU	da:taSE:tadOY	SE:	
1701	ATAWPADAI	QatavpadaI	vp	
1702	ADIEBDADAI	Qadi:badaI	i:b	
1703	ADETCADAI	Qad@tCadaI	tC	
1704	ATA AUTANEU	QataQaUtanOY	QaU	
1705	ATIEÖTTADAU	Qati:9tadaU	i:9	
1706	ADASCHADAI	QadaSa:daI	aS	
1707	ADAHTSCHADAI	Qada:tSa:daI	a:tS	
1708	ADEMCHADEU	Qa:d@mCadOY	mC	
1709	ADISSADDI	Qa:dIsadI	I*	
1710	ATASJADEU	QatazjadOY	zj	
1711	ATAPFSADAI	QatapfzadaI	pfz	
1712	PATIEFADAU	pati:fa:daU	i:f	
1713	ADESCHCHADAI	QadEZCadaI	ZC	
1714	ADESCHADAI	QadEsCadaI	sC	
1715	ATÖHADEU	Qat2:hadOY	2:h	
1716	ATEEÜTTADAU	Qa:te:YtadaU	e:Y	
1717	ADEDCHADAI	Qad@dCadaI	dC	
1718	ADEESCHADAI	Qade:Sa:daI	e:S	
1719	ADAUTADAI	QadaUtadaI	aUt	
1720	ATAMSADAI	QatamzadaI	mz	
1721	ADESCHADAI	QadEzCadaI	zC	
1722	PATASTSADAU	patastsadaU	sts	
1723	ADENCHADEU	a:d@nCadOY	nC	
1724	DATABÖHTADEU	da:tab2:tadOY	b2:	
1725	ADISCHADAI	QadIZadaI	IZ	
1726	CHADISADAI	Ca:dizadaI	*C	
1727	ATÄÜTTADAU	QatEYtadaU	EY	
1728	DATAUOHTADEU	da:taUo:tadOY	aUo:	
1729	ATATMADEU	Qatatma:daU	tm	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
1730	PATEKCHADAU	pa:t@kCadaU	kC	
1731	PATATFADAU	pata:tfa:daU	tf	
1732	DATEEIETADEU	date:i:tadOY	e:i:	
1733	ATASÖTTADAU	Qatas9tadaU	s9	
1734	ATOOUTTADAU	Qato:UtadaU	o:U	
1735	ATASCHEUTADEU	QataZOYtadOY	ZOY	
1736	ATASCHSCHADAI	QataSZadaI	SZ	
1737	ATABTSADAU	QatQabtsadaU	bts	
1738	ATALOTTADAU	QatalOtadaU	IO	
1739	DATAGÜHTADEU	da:ta:gy:tadOY	gy:	
1740	ATASCHHADEU	QataZhadOY	Zh	
1741	ATASITTADAU	QatasItadaU	sI	
1742	DATABIEHTADEU	da:tabi:tadOY	bi:	
1743	PATTERGADAU	pat6gadaU	6g	
1744	ADETZCHADAI	QadEtsCadaI	tsC	
1745	APBADAI	Qapba:daI	pb	
1746	ADÖTTADAI	Qad9tadaI	9t	
1747	ATAIMADEU	QataIma:daU	aIm	
1748	PATEFCHADAU	pa:t@fCadaU	fC	
1749	ADOHTZADEI	Qado:tsadaI	o:ts	
1750	ATTERRADEU	Qat6RadOY	6R	
1751	ATAPTADAI	QataptadaI	pt	
1752	ADOHTSCHADAI	Qado:tSa:daI	o:tS	
1753	ATATSCHÖHTADEU	QatatS2:tadOY	tS2:	
1754	ATANCHADAI	QatanxadaI	nx	
1755	ADEPCHADAI	Qad@pCadaI	pC	
1756	ATAGSADAI	QatagsadaI	gs	
1757	ADEBCHADAI	Qad@bCadaI	bC	
1758	ATASBADAI	Qatasba:daI	sb	
1759	ATAMLADEU	Qatamla:daU	ml	
1760	ATAFSCHADAI	QatafSa:daI	fS	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
1761	ADUSSADAI	QadUzadaI	Uz	
1762	ADÜTTADAI	QadYtadaI	Yt	
1763	DATASCHUHTADEU	da:taSu:tadOY	Su:	
1764	DATAIEHTADEU	dataIe:tadOY	aIe:	
1765	DATADOHTADEU	da:tado:tadOY	do:	
1766	ADENGCHADEU	Qa:dENCadOY	NC	
1767	ATAK ADAI	QatakQadaI	kQ	
1768	ATATSCHÜTTADAU	QatatSYtadaU	tSY	
1769	ATANDADAI	QatandadaI	nd	
1770	ADETSCHCHADAI	QadEtSCadaI	tSC	
1771	ATATZCHADAI	QatatsxadaI	tsx	
1772	ATIEEDADEU	Qati:@da:daU	i:@	
1773	ATÜLLADEU	QatYIa:daU	YI	
1774	ADIBBADAI	QadIba:daI	Ib	
1775	DATIEOHTADEU	dati:o:tadOY	i:o:	
1776	DATAFOHTADEU	da:tafo:tadOY	fo:	
1777	PATEGCHADAU	pat@gCadaU	gC	
1778	ADÖTZADAI	Qad9tsadaI	9ts	
1779	ADEPFCHADAI	Qad@pfCadaI	pfC	
1780	ATASCHAUTADEU	QataZaUtadOY	ZaU	
1781	DATAWIEHTADEU	da:tavi:tadOY	vi:	
1782	ATASLADEU	Qatasla:daU	sl	
1783	ATACHAITADEU	QataxaItadOY	xaI	
1784	ATANLADEU	Qatanla:daU	nl	
1785	DATANEHTADEU	da:tane:tadOY	ne:	
1786	ATAIUTTADAU	QataIUtadaU	aIU	
1787	ATTECH ADAI	QatECQadaI	CQ	
1788	ATAPFADAI	Qatap fa:daI	pf	
1789	ATÜOTTADAU	QatYOtadaU	YO	
1790	ATAPFJADEU	Qatapfja:daU	pfj	
1791	DATAGOHTADEU	da:ta:go:tadOY	go:	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
1792	ADAHTADEI	Qada:tadaI	a:t	
1793	ATAJÄTTADAU	QatajEtadaU	jE	
1794	ADO ADAI	QadOQadaI	OQ	
1795	DATAHAHTADEU	da:taha:tadOY	ha:	
1796	ADUHPADAI	Qadu:padaI	u:p	
1797	ATATJADEU	Qata:tja:daU	tj	
1798	ATTETSCHADAI	Qat@tSadaI	@tS	
1799	ADÖBBADAI	Qad9badaI	9b	
1800	ADÄWWADAI	QadEvadaI	Ev	
1801	ATANGATTADAU	QataNatadaU	Na	
1802	TSCHADISADAU	tSa:dizadaU	*tS	
1803	ATASCHHADEU	QataShadOY	Sh	
1804	DATAGAHTADEU	da:ta:ga:tadOY	ga:	
1805	ATAPÄHTADEU	QatapE:tadOY	pE:	
1806	ADEUWADAI	QadOYvadaI	OYv	
1807	ADUHTZADAI	Qadu:tsadaI	u:ts	
1808	PATASKADAU	pataskadaU	sk	
1809	ADISCHADAI	Qa:dISa:daI	IS	
1810	DATAMIEHTADEU	da:tami:tadOY	mi:	
1811	ATUHJADEU	Qatu:ja:daU	u:j	
1812	ATÄATTADAU	QatEatadaU	Ea	
1813	DATATZOHTADEU	datatso:tadOY	tso:	
1814	ATÜEDADEU	QatY@da:daU	Y@	
1815	ATAJERTADEU	Qataj6tadOY	j6	
1816	ATATSCHAHTADEU	QatatSa:tadOY	tSa:	
1817	ATOHNADEU	Qato:nadOY	o:n	
1818	ADOTTADAI	QadOtadaI	Ot	
1819	ADOHBADAI	Qado:ba:daI	o:b	
1820	ATARDADAI	QataRdadaI	Rd	
1821	ATASSADAI	QatazsadaI	zs	
1822	DATARUHTADEU	dataRu:tadOY	Ru:	

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
1823	ATTECHÖTTADAU	QatEC9tadaU	C9	
1824	DATANOHTADEU	da:tano:tadOY	no:	
1825	ATAPGADAU	QatapgadaU	pg	
1826	ATAGATTADAU	QatagatadaU	ga	
1827	ATACHITTADAU	QataxItadaU	xI	
1828	ATASDADAI	QatazdadaI	zd	
1829	DATASIEHTADEU	da:tazi:tadOY	zi:	
1830	ADAUTZADAI	QadaUtsadaI	aUts	
1831	ADESCHCHADAI	adESCadaI	SC	
1832	ADEUBADAI	QadOYba:daI	OYb	
1833	PATAGFADAU	patagfadaU	gf	
1834	ATASCHLADEU	QataSla:daU	Sl	
1835	ADISSADDA	Qa:dIsada	a*	
1836	ATA IEHTADEU	QataQi:tadOY	Qi:	
1837	ADOCHADAI	QadOxadaI	Ox	
1838	PATACHPFADAU	pataxpfa:daU	xpf	
1839	DATATHÖTAEU	dataTo~tadOY	To~	ENG/FR
1840	ATABOUDEU	Qatab@UdOY	b@U	ENG
1841	ATAPEIDEU	QatapEIIdOY	pEI	ENG
1842	ATILLADEU	QatILadOY	IL	ENG
1843	ATTERLADEU	Qat6LadOY	6L	ENG
1844	DATATHËTAEU	dataTE~tadOY	TE~	ENG/FR
1845	DATATHËTAEU	dataTa~tadOY	Ta~	ENG/FR
1846	ATATHWADAI	QataDvadaI	Dv	ENG
1847	ATALAITAEU	QataLaltadOY	LaI	ENG
1848	ATAHWADAI	QatahwadaI	hw	ENG
1849	ATATHWADAI	QataTwadaI	Tw	ENG/ENG
1850	ADÖHTHADAI	Qad2:TadaI	2:T	ENG
1851	ATABTHADAI	QatabDadaI	bD	ENG
1852	ATAHOUTEU	Qatah@UtOY	h@U	ENG
1853	ATALEITAEU	QataLEItadOY	LEI	ENG/ENG

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
1854	ATALTHADAI	QatalDadaI	lD	ENG
1855	ATAPTHADAI	QatapDadaI	pD	ENG
1856	DATEIAHTADEU	datEIa:tadOY	EIa:	ENG
1857	ADAIWADAI	QadaIwadaI	aIw	ENG
1858	ADIETHADAI	Qadi:TadaI	i:T	ENG
1859	DATATHEHTADEU	dataDe:tadOY	De:	ENG
1860	ATANEITADEU	QatanEI tadOY	nEI	ENG
1861	ATAWHADEU	QatawhadOY	wh	ENG
1862	ADISSADAL	QadIsadaL	L*	ENG
1863	DATAREHTADEU	da:tare:tadOY	re:	ENG
1864	ADISSADATH	QadIsadaT	T*	ENG
1865	ATALLERTADEU	QataL6tadOY	L6	ENG
1866	ATAPWADAI	QatapwadaI	pw	ENG
1867	ATASTHADAI	QatasDadaI	sD	ENG
1868	ATAWSADAI	QatawsadaI	ws	ENG
1869	DATATHUHTADEU	dataDu:tadOY	Du:	ENG
1870	ATATHNADEU	QataDnadOY	Dn	ENG
1871	ATASTHADAI	QatazTadaI	zT	ENG
1872	ATAHLADEU	Qata:LadOY	a:L	ENG
1873	ATACHLADEU	QataxLadOY	xL	ENG
1874	ATEIERTADEU	QatEI6tadOY	EI6	ENG
1875	ADISSADEI	QadIsadEI	EI*	ENG
1876	ATAWRADEU	QatawradOY	wr	ENG/ENG
1877	ATALTSCHADAU	QataLtSadaU	LtS	ENG
1878	ATA EITANEU	QataQEItanOY	QEI	ENG
1879	ATEIJADEU	QatEIjadOY	EIj	ENG
1880	DATALOHTADEU	dataLo:tadOY	Lo:	ENG
1881	ATACHOUTADEU	Qatax@UtadOY	x@U	ENG
1882	ATTETHADAI	Qat@TadaI	@T	ENG
1883	ATAR ADAI	QatarQadaI	rQ	ENG
1884	ATARCHADEU	QatarxadOY	rx	ENG

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
1885	ADOHTHADAI	Qado:DadaI	o:D	ENG
1886	ATALNADEU	QataLnadOY	Ln	ENG
1887	ATATHCHADAI	QataDxadaI	Dx	ENG
1888	ATARSCHADAI	QatarSadaI	rS	ENG
1889	ATTECHTHADAI	QatECTadaI	CT	ENG
1890	ATALAUTADEU	QataLaUtadOY	LaU	ENG
1891	ATALRADEU	Qata:lra:daU	lr	ENG
1892	ADITHADAI	QadIDadaI	ID	ENG
1893	ATEIRADEU	QatEIradOY	EIr	ENG/ENG
1894	APAKTHADAI	QapakDadaI	kD	ENG
1895	ATAREUTADEU	QatarOYtadOY	rOY	ENG
1896	ADÜHTHADEI	Qady:TadaI	y:T	ENG
1897	ATAGLADEU	QatagLadOY	gL	ENG
1898	ADOWWADAI	QadaOwadaI	Ow	ENG
1899	ATEINADEU	QatElnadOY	Eln	ENG
1900	ATAHRADEU	Qata:ra:daU	a:r	ENG
1901	ATEELADEU	Qate:LadOY	e:L	ENG
1902	DATARÖHTADEU	da:tar2:tadOY	r2:	ENG
1903	ADIWWADAI	QadIwadaI	Iw	ENG
1904	DATAWIEHTADEU	datawi:tadOY	wi:	ENG
1905	ATALWADAI	QataLwadaI	Lw	ENG/ENG
1906	ATAJLADEU	QatajLadOY	jL	ENG
1907	ADOUSADAI	Qad@UsadaI	@Us	ENG
1908	ATARRADEU	QatarRdOY	rR	ENG
1909	PATATHTSADAU	pataTtsadaU	Tts	ENG
1910	ATATHPADAI	QataDpadaI	Dp	ENG
1911	ADATHADAI	QadaDadaI	aD	ENG
1912	ATABLADEU	QatabLadOY	bL	ENG
1913	ATAMLADEU	QatamLadOY	mL	ENG
1914	ATADWADAI	QatadwadaI	dw	ENG
1915	ATOUÄTTADAU	Qat@UEtadaU	@UE	ENG

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
1916	ATALRADEU	QataLradOY	Lr	ENG/ENG
1917	ATASWADAI	QataswadaI	sw	ENG
1918	PATAWTSADAU	patawtsadaU	wts	ENG
1919	ADEISADAI	QadElzadaI	Elz	ENG
1920	ATAROTTADAU	QatarOtadaU	rO	ENG
1921	ATARRETADEU	Qatar@tadOY	r@	ENG
1922	ATAWAITADEU	QatawaItadOY	waI	ENG
1923	ATALEITADEU	QatalElItadOY	IEI	ENG
1924	ATATSCHWADAI	QatatSwadaI	tSw	ENG
1925	DATARUHTADEU	da:taru:tadOY	ru:	ENG
1926	ATARTHADAI	QatarDadaI	rD	ENG/ENG
1927	ATASRADEU	QatazradOY	zr	ENG
1928	ADEITSCHADAI	QadElItSadaI	ElItS	ENG
1929	ADOUCHADAI	Qad@UxadaI	@Ux	ENG
1930	ATAGTHADAI	QatagTadaI	gT	ENG
1931	ATATHITTADAU	QataTItadaU	TI	ENG
1932	ADAHTHADEI	Qada:TadaI	a:T	ENG
1933	DATEIÜHTADEU	datEly:tadOY	Ely:	ENG
1934	ATALWADAI	QatalwadaI	lw	ENG
1935	ATARHADEU	QatarhadOY	rh	ENG
1936	ADISSADAR	QadIsadar	r*	ENG
1937	ATANOUTADEU	Qatan@UtadOY	n@U	ENG
1938	ATATSCHEITEU	QatatSEItOY	tSEI	ENG
1939	ADOUSCHADAI	Qad@USadaI	@US	ENG
1940	ATALBADAI	QataLbadaI	Lb	ENG
1941	ADOUWADAI	Qad@UvadaI	@Uv	ENG
1942	ATOULADEU	Qat@ULadOY	@UL	ENG/ENG
1943	ATAMWADAI	QatamwadaI	mw	ENG
1944	ATARAITADEU	QataraItadOY	raI	ENG
1945	ADOUTHADAI	Qad@UTadaI	@UT	ENG/ENG
1946	ATATHSADAI	QataDzadaI	Dz	ENG

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
1947	ATAL ADAI	QataLQadaI	LQ	ENG
1948	ATEIHADEU	QatEIhadOY	EIh	ENG
1949	ADOUTSCHADAI	Qad@UtSadaI	@UtS	ENG
1950	ATARTHADAI	QatarTadaI	rT	ENG/ENG
1951	ADÜHTHADAI	Qady:DadaI	y:D	ENG
1952	ADÖTHADEI	Qad9TadaI	9T	ENG
1953	APAKWADAI	QapakwadaI	kw	ENG
1954	APAKOUTEU	Qapak@UtOY	k@U	ENG
1955	DATAWÜHTADEU	datawy:tadOY	wy:	ENG
1956	ATARÖTTADAU	Qatar9tadaU	r9	ENG
1957	ATASOUTEU	Qataz@UtOY	z@U	ENG
1958	ATARÄTTADAU	QatarEtadaU	rE	ENG
1959	ATATHEITADEU	QataTEItadOY	TEI	ENG/ENG
1960	ATARLADEU	QatarLadOY	rL	ENG/ENG
1961	ADEITADAI	QadEItadaI	EIt	ENG
1962	ATASRADEU	Qatasra:daU	sr	ENG
1963	DATATHAHTADEU	dataTa:tadOY	Ta:	ENG
1964	ATATHDADAI	QataDdadaI	Dd	ENG
1965	PATAWFADAU	patawfadaU	wf	ENG
1966	ADUWWADAI	QadUwadaI	Uw	ENG
1967	DATARÜHTADEU	da:tary:tadOY	ry:	ENG
1968	ATATSCHOUTEU	QatatS@UtOY	tS@U	ENG
1969	ATALHADEU	QataLhadOY	Lh	ENG
1970	ATAWJADEU	QatawjadOY	wj	ENG
1971	ADOU ADAI	Qad@UQadaI	@UQ	ENG
1972	PATEIGADAU	patEIgadaU	EIg	ENG
1973	DATALÜHTADEU	dataLy:tadOY	Ly:	ENG
1974	ATALITTADAU	QataLItdaU	LI	ENG
1975	*OUTATADAI	@UtatadaI	*@U	ENG
1976	ADAUTHADAI	QadaUDadaI	aUD	ENG
1977	DATATHOHTADEU	dataDo:tadOY	Do:	ENG

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
1978	ATANTHADAI	QatanDadaI	nD	ENG
1979	ATÖHLADEU	Qat2:LadOY	2:L	ENG
1980	ATÜRRADEU	QatYra:daU	Yr	ENG
1981	ATALDADAI	QataLdadaI	Ld	ENG
1982	ATEIÖTTADAU	QatEI9tadaU	EI9	ENG
1983	ATOUERTADEU	Qat@U6tadOY	@U6	ENG
1984	ADEISCHADAI	QadEISadaI	EIS	ENG
1985	ATAWTHADAI	QatawDadaI	wD	ENG/ENG
1986	ADEIWADAI	QadEIwadaI	EIw	ENG/ENG
1987	ADÖHWADAI	Qad2:wadaI	2:w	ENG
1988	ATAROUTADEU	QataR@UtadOY	R@U	ENG
1989	DATATHIEHTADEU	dataDi:tadOY	Di:	ENG
1990	PATARKADAU	patarkadaU	rk	ENG
1991	ATASCHWADAI	QataZwadaI	Zw	ENG
1992	ADÄWWADAI	QadEwadaI	Ew	ENG
1993	ATAWOTTADAU	QatawOtadaU	wO	ENG
1994	PATATHGADAU	pataTgadaU	Tg	ENG
1995	ATAJWADAI	QatajwadaI	jw	ENG
1996	DATALEHTADEU	dataLe:tadOY	Le:	ENG
1997	ATEENGADEU	Qate:NadOY	e:N	
1998	ATEURADEU	QatOYradOY	OYr	ENG
1999	ATALOUTADEU	Qatal@UtadOY	l@U	ENG
2000	ATAGEITEU	QatagEItOY	gEI	ENG
2001	ATABEIDEU	QatabEIdOY	bEI	ENG
2002	ATARAUTADEU	QataraUtadOY	raU	ENG
2003	ATUHRADEU	Qatu:ra:daU	u:r	ENG
2004	ATAPFLADEU	QatapfLadOY	pfL	ENG
2005	ATIERADEU	Qati:ra:daU	i:r	ENG
2006	ATATWADAI	QatatwadaI	tw	ENG
2007	ATAPFTHADAI	QatapfTadaI	pfT	ENG
2008	ATALWADAI	QataLvadaI	Lv	ENG

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
2009	ATAURADEU	QataUra:daU	aUr	ENG
2010	ATAMRADEU	Qatamra:daU	mr	ENG
2011	PATARFADAU	patarfadaU	rf	ENG
2012	ATATHBADAI	QataTbadaI	Tb	ENG
2013	ATALTHADAI	QataLTadaI	LT	ENG/ENG
2014	ATABRADEU	QatabradOY	br	ENG
2015	ATATSCHTHADAI	QatatSDadaI	tSD	ENG
2016	ATEILADEU	QatEIladOY	EIl	ENG
2017	ATATHWADAI	QataDwadaI	Dw	ENG/ENG
2018	ATAWAUTADEU	QatawaUtadOY	waU	ENG
2019	ATAW ADAI	QatawQadaI	wQ	ENG
2020	DATEIIEHTADEU	datEli:tadOY	Eli:	ENG
2021	ATAPFRADEU	Qatapfra:daU	pfr	ENG
2022	DATARAHTADEU	da:tara:tadOY	ra:	ENG
2023	ATATRADEU	Qatatra:daU	tr	ENG
2024	ATATZTHADAI	QatatsTadaI	tsT	ENG
2025	ATARSCHADAI	QatarZadaI	rZ	ENG
2026	ATABTHADAI	QatabTadaI	bT	ENG
2027	ATACHTHADAI	QataxDadaI	xD	ENG
2028	ATAWÜTTADAU	QatawYtadaU	wY	ENG
2029	ATALSCHADAI	QataLSadaI	LS	ENG
2030	ATOUATTADAU	QatO@UatadaU	@Ua	ENG
2031	ATAGTHADAI	QatagDadaI	gD	ENG
2032	ATÖLLADEU	Qat9LadOY	9L	ENG
2033	DATATHAHTADEU	dataDa:tadOY	Da:	ENG
2034	ATAPFWADAI	QatapfwadaI	pfw	ENG
2035	PATEIKADAU	patEIkadaU	EIk	ENG
2036	ATOHRADEU	Qato:ra:daU	o:r	ENG
2037	ATAFLADEU	QatafLadOY	fL	ENG
2038	ATATHÄTTADAU	QataTEtadaU	TE	ENG
2039	ATALÖTTADAU	QataL9tadaU	L9	ENG

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
2040	ATTERHADAI	Qat6DadaI	6D	ENG
2041	ATAHEITEU	QatahEItoY	hEI	ENG
2042	ATEIOTTADAU	QatEIotadaU	EIO	ENG
2043	ADEETHADAI	Qade:DadaI	e:D	ENG
2044	ATADLADEU	QatadLadOY	dL	ENG
2045	ADÜTHADAI	QadYTadaI	YT	ENG
2046	ATAWITTADAU	QatawItadaU	wI	ENG
2047	ATATHCHADAI	QataTxadaI	Tx	ENG
2048	DATEIOHTADEU	datEIo:tadOY	EIo:	ENG
2049	ATATSCHRADEU	QatatSra:daU	tSr	ENG
2050	ATOUMADEU	Qat@UmadOY	@Um	ENG
2051	ADEITZADAI	QadEItsadaI	EIts	ENG
2052	ATASCHWADAI	QataSwadaI	Sw	ENG
2053	ATARNGADEU	QatarNadOY	rN	ENG
2054	ATALOTTADAU	QataLOtadaU	LO	ENG
2055	ATAWÄTTADAU	QatawEtadaU	wE	ENG
2056	ATOUNADEU	Qat@UnadOY	@Un	ENG
2057	ATASLADEU	QatazLadOY	zL	ENG
2058	ADEUWADAI	QadOYwadaI	OYw	ENG
2059	ADOUOUTADEU	Qad@U@UtadOY	@U@U	ENG/ENG
2060	ATATHATTADAU	QataTatadaU	Ta	ENG
2061	ATANWADAI	QatanwadaI	nw	ENG
2062	ATOUHADEU	Qat@UhadOY	@Uh	ENG
2063	ATATHADAI	QataDtadaI	Dt	ENG
2064	ATATEITADEU	QatatEItoY	tEI	ENG
2065	DATOUIEHTADEU	dat@Ui:tadOY	@Ui:	ENG
2066	ATAWSADAI	QatawzadaI	wz	ENG
2067	ATTERADEU	Qat@radOY	@r	ENG
2068	ATADRADEU	Qatadra:daU	dr	ENG
2069	ATAPOUDEU	Qatap@UdOY	p@U	ENG
2070	ADÄTHADAI	QadETadaI	ET	ENG

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
2071	ATOUNGADEU	Qat@UNadOY	@UN	ENG
2072	PATATHKADAU	pataTkadaU	Tk	ENG
2073	ATACHEITADEU	QataxEItadOY	xEI	ENG
2074	ATTERTHADAI	Qat6TadaI	6T	ENG
2075	ATAWLADEU	QatawladOY	wl	ENG
2076	ADOUDADAI	Qad@UdadaI	@Ud	ENG
2077	ATAWUTTADAU	QatawUtadaU	wU	ENG
2078	DATATHÖHTADEU	dataD2:tadOY	D2:	ENG
2079	DATATHÖHTADEU	dataT2:tadOY	T2:	ENG
2080	PATATHTSADAU	pataDtsadaU	Dts	ENG
2081	ADISSADOU	QadIsad@U	@U*	ENG
2082	ATOUIADEU	Qat@UjadOY	@Uj	ENG
2083	ATAWTHADAI	QatavTadaI	vT	ENG
2084	ATTECHLADEU	QatECLadOY	CL	ENG
2085	ADIEWADAI	Qadi:wadaI	i:w	ENG
2086	ATAMOUTADEU	Qatam@UtadOY	m@U	ENG
2087	ATAMTHADAI	QatamTadaI	mT	ENG
2088	ATAWSCHADAI	QatawSadaI	wS	ENG
2089	ATASEITEU	QatasEItOY	sEI	ENG
2090	ATATHMADEU	QataTmadOY	Tm	ENG
2091	ATAWLADEU	QatawLadOY	wL	ENG/ENG
2092	ATOURADEU	Qat@UradOY	@Ur	ENG/ENG
2093	ATATHÄTTADAU	QataDEtadaU	DE	ENG
2094	ATALUTTADAU	QataLUtadaU	LU	ENG
2095	DATOUÖHTADEU	dat@U2:tadOY	@U2:	ENG
2096	ATATTHADAI	QatatTadaI	tT	ENG
2097	ATASCHEITEU	QataSEItOY	SEI	ENG
2098	ATOULADEU	Qat@UladOY	@Ul	ENG
2099	ATEERADEU	Qa:te:ra:daU	e:r	ENG
2100	ATATHOUTADEU	QataD@UtadOY	D@U	ENG/ENG
2101	PATATHKADAU	pataDkadaU	Dk	ENG

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
2102	ATANGWADAI	QataNwadaI	Nw	ENG
2103	ATIELADEU	Qati:LadOY	i:L	ENG
2104	ADEITHADAI	QadEITadaI	EIT	ENG/ENG
2105	ADUTHADAI	QadUDadaI	UD	ENG
2106	ATOOUOTTADAU	Qat@UOtadaU	@UO	ENG
2107	ATA OUTANEU	QataQ@UtanOY	Q@U	ENG
2108	ATAWWADAI	QatavwadaI	vw	ENG
2109	ATATH ADAI	QataTQadaI	TQ	ENG
2110	DATATHEHTADEU	dataTe:tadOY	Te:	ENG
2111	ADOUWADAI	Qad@UwadaI	@Uw	ENG/ENG
2112	ADEUTHADAI	QadOYDadaI	OYD	ENG
2113	PATATHFADAU	pataTfadaU	Tf	ENG
2114	ATAWLADEU	QatavLadOY	vL	ENG
2115	ATASLADU	QatasLadOY	sL	ENG
2116	ADEIDADAI	QadEIdadaI	EId	ENG
2117	ADAHWADAI	Qada:wadaI	a:w	ENG
2118	ATATHUTTADAU	QataTUtadaU	TU	ENG
2119	ATATTHADAI	QatatDadaI	tD	ENG
2120	DATATHUHTADEU	dataTu:tadOY	Tu:	ENG
2121	ADOHTHADEI	Qado:TadaI	o:T	ENG
2122	ATATHLADU	QataDladOY	Dl	ENG
2123	ATTETHADAI	Qat@DadaI	@D	ENG
2124	ATASCHOUTADEU	QataZ@UtadOY	Z@U	ENG
2125	ATASOUTEU	Qatas@UtOY	s@U	ENG
2126	PATATHGADAU	pataDgadaU	Dg	ENG
2127	ATALNGADEU	QataLNadOY	LN	ENG
2128	ATTECHRADEU	QatECra:daU	Cr	ENG
2129	DATOUAHTADEU	dat@Ua:tadOY	@Ua:	ENG
2130	ATTECHEITEU	QatECEItOY	CEI	ENG
2131	ATATHDADAI	QataTdadaI	Td	ENG
2132	ATANGTHADAI	QataNTadaI	NT	ENG

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
2133	DATEIÖHTADEU	datEI2:tadOY	EI2:	ENG
2134	DATAWAHTADEU	datawa:tadOY	wa:	ENG
2135	ATASTHADAI	QatasTadaI	sT	ENG
2136	ATADTHADAI	QatadTadaI	dT	ENG
2137	ATARRADEU	QataRradOY	Rr	ENG
2138	ATATHSADAI	QataTsadaI	Ts	ENG
2139	DATAWÖHTADEU	dataw2:tadOY	w2:	ENG
2140	ATARDADAI	QatardadaI	rd	ENG
2141	ATAWNADEU	QatawnadOY	wn	ENG
2142	ATAWCHADEU	QatawxadOY	wx	ENG
2143	ATAWWERTADEU	Qataw6tadOY	w6	ENG
2144	ATANGRADEU	QataNradOY	Nr	ENG
2145	WADISADAI	wadizadaI	*w	ENG
2146	ATAWPADAI	QatawpadaI	wp	ENG
2147	ATAFTHADAI	QatafTadaI	fT	ENG
2148	DATAWUHTADEU	datawu:tadOY	wu:	ENG
2149	PATATHTSCHADAU	pataTtSadaU	TtS	ENG
2150	PATEIPFADAU	patElpfadaU	Elpf	ENG
2151	ATARÜTTADAU	QatarYtadaU	rY	ENG
2152	ATOUUTTADAU	Qat@UUtadaU	@UU	ENG
2153	ADITHADAI	QadITadaI	IT	ENG
2154	ATARLADEU	QatarladOY	rl	ENG
2155	ATAWOUTADEU	Qataw@UtadOY	w@U	ENG/ENG
2156	ATATHUTTADAU	QataDUtadaU	DU	ENG
2157	ATARITTADAU	QatarItadaU	rI	ENG
2158	ATAREITADEU	QataREItadOY	REI	ENG
2159	ATATHOTTADAU	QataTOtadaU	TO	ENG
2160	ADOUPADAI	Qad@UpadaI	@Up	ENG
2161	ATATHPADAI	QataTpadaI	Tp	ENG
2162	ATATZOUTEU	Qatats@UtOY	ts@U	ENG
2163	ATANGOUTADEU	QataN@UtadOY	N@U	ENG

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
2164	ATANGTHADAI	QataNDadaI	ND	ENG
2165	ADÄTHADAI	QadEDadaI	ED	ENG
2166	ATATHRADEU	QataTRadOY	TR	ENG
2167	PATATHTSCHADAU	pataDtSadaU	DtS	ENG
2168	ATALLADEU	QataLladOY	Ll	ENG
2169	ADÄHWADAI	QadE:wadaI	E:w	ENG
2170	ATATHJADEU	QataDjadOY	Dj	ENG
2171	ATAWDADAI	QatawdadaI	wd	ENG
2172	ADUHTHADAI	Qadu:DadaI	u:D	ENG
2173	ATEILADEU	QatEILadOY	EIL	ENG/ENG
2174	ATARMADEU	QatarmadOY	rm	ENG
2175	ATATH ADAI	QataDQadaI	DQ	ENG
2176	ATAWEITADEU	QatavEItadOY	vEI	ENG
2177	ATAMEITADEU	QatamEItadOY	mEI	ENG
2178	ATÄLLADEU	QatELadOY	EL	ENG
2179	PATAWPFADAU	patawpfadaU	wpf	ENG
2180	ATALSCHADAI	QataLZadaI	LZ	ENG
2181	ATATHERTADEU	QataT6tadOY	T6	ENG
2182	PATOUFADAU	pat@UfadaU	@Uf	ENG
2183	ATARSADAI	QatarzadaI	rz	ENG
2184	ADISSADAW	QadIsadaw	w*	ENG
2185	ATAMTHADAI	QatamDadaI	mD	ENG
2186	ADOUTZADAI	Qad@UtsadaI	@Uts	ENG
2187	ATATHATTADAU	QataDatadaU	Da	ENG
2188	ATATHEUTADEU	QataDOYtadOY	DOY	ENG
2189	ATATHSADAI	QataDsadaI	Ds	ENG
2190	ADAITHADAI	QadaIDadaI	aID	ENG
2191	ATOLLADEU	QatOLadOY	OL	ENG
2192	ATAIRADEU	QataIra:daU	aIr	ENG
2193	THADISADAI	DadizadaI	*D	ENG
2194	ATAWTHADAI	QatavDadaI	vD	ENG

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
2195	PATATHFADAU	pataDfadaU	Df	ENG
2196	PATOUKADAU	pat@UkadaU	@Uk	ENG
2197	ATADTHADAI	QatadDadaI	dD	ENG
2198	ADAWWADAI	QadawadaI	aw	ENG
2199	ADEI ADAI	QadEIQadaI	EIQ	ENG
2200	ADEIEITADAI	QadEIEItadaI	EIEI	ENG/ENG
2201	DATATHIEHTADEU	dataTi:tadOY	Ti:	ENG
2202	ATAWMADEU	QatawmadOY	wm	ENG
2203	ATEIATTADAU	QatEIatadaU	EIa	ENG
2204	ADÄHTHADAI	QadE:TadaI	E:T	ENG
2205	ADAUTHADAI	QadaUTadaI	aUT	ENG
2206	ATAJEITADEU	QatajEItadOY	jEI	ENG
2207	ATACHTHADAI	QataxTadaI	xT	ENG
2208	ATURRADEU	QatUradOY	Ur	ENG
2209	ATACHRADEU	Qataxra:daU	xr	ENG
2210	PATAWGADAU	patawgadaU	wg	ENG
2211	ATACHWADAI	QataxwadaI	xw	ENG
2212	ATTENGADEU	Qat@NadOY	@N	
2213	ATORRADEU	QatOradOY	Or	ENG
2214	PATARGADAU	patargadaU	rg	ENG
2215	ATAJTHADAI	QatajDadaI	jD	ENG
2216	ADEEWADAI	Qade:wadaI	e:w	ENG
2217	ATATHWADAI	QataTvadaI	Tv	ENG
2218	ATTECHWADAI	QatECwadaI	Cw	ENG
2219	ATATHLADEU	QataTladOY	Tl	ENG
2220	ATOUÖTTADAU	Qat@U9tadaU	@U9	ENG
2221	ATÖRRADEU	Qat9ra:daU	9r	ENG
2222	ATARTHADAI	QataRDadaI	RD	ENG
2223	ATATHSCHADAI	QataTSadaI	TS	ENG
2224	ATADOUTEU	Qatad@UtOY	d@U	ENG
2225	ATTEEITADEU	Qat@EItadOY	@EI	ENG

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
2226	ADEETHADAI	Qade:TadaI	e:T	ENG
2227	ATARPADAI	QatarpadaI	rp	ENG
2228	ATALLADEU	QatalLadOY	IL	ENG
2229	ATALATTADAU	QataLatadaU	La	ENG
2230	ATASCHLADEU	QataSLadOY	SL	ENG
2231	ATEIEDADEU	QataEI@dadOY	EI@	ENG
2232	ATATHSCHADAI	QataDZadaI	DZ	ENG
2233	ATATHOUTADEU	QataT@UtadOY	T@U	ENG/ENG
2234	ADOUBADAI	Qad@UbadaI	@Ub	ENG
2235	DATALÄHTADEU	dataLE:tadOY	LE:	ENG
2236	ATAREITEU	QatarEItoY	rEI	ENG/ENG
2237	ATATZEITEU	QatatsEItoY	tsEI	ENG
2238	ATALSADAI	QataLsadaI	Ls	ENG
2239	PATAWTSCHADAU	patawtSadaU	wtS	ENG
2240	DATALÖHTADEU	dataL2:tadOY	L2:	ENG
2241	ATANGEITADEU	QataNEItadOY	NEI	ENG
2242	ATASCHTHADAI	QataSDadaI	SD	ENG
2243	DATAROHTADEU	da:taro:tadOY	ro:	ENG
2244	DATATHÜHTADEU	dataTy:tadOY	Ty:	ENG
2245	ATATHHADEU	QataThadOY	Th	ENG
2246	ATATHRADEU	QataDRadOY	DR	ENG
2247	ATTERRADEU	Qat6ra:daU	6r	ENG
2248	ATALTHADAI	QatalTadaI	IT	ENG
2249	ATAPFTHADAI	QatapfDadaI	pfD	ENG
2250	ATÜHRADEU	Qaty:ra:daU	y:r	ENG
2251	ATAWRADEU	Qatavra:daU	vr	ENG
2252	ATOUÜTTADAU	Qat@UYtadaU	@UY	ENG
2253	DATAWÄHTADEU	datawE:tadOY	wE:	ENG
2254	ATARTADAI	QatartadaI	rt	ENG
2255	DATATHOHTADEU	dataTo:tadOY	To:	ENG
2256	ATAFOUTEU	Qataf@UtOY	f@U	ENG

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
2257	ATANLADEU	QatanLadOY	nL	ENG
2258	ATATHSCHADAI	QataTZadaI	TZ	ENG
2259	ATOUITTADAU	Qat@UItadaU	@UI	ENG
2260	DATARIEHTADEU	da:tari:tadOY	ri:	ENG
2261	ATAPTHADAI	QatapTadaI	pT	ENG
2262	ATATHÜTTADAU	QataTYtadaU	TY	ENG
2263	ATASCHOUTEU	QataS@UtOY	S@U	ENG
2264	ATATLADEU	QatatLadOY	tL	ENG
2265	ATAPFEITEU	QatapfEItoY	pfEI	ENG
2266	ATARSADAI	QatarsadaI	rs	ENG
2267	ATALMADEU	QataLmadOY	Lm	ENG
2268	ATEIMADEU	QatEIImadOY	EIm	ENG
2269	ATALEUTADEU	QataLOYtadOY	LOY	ENG
2270	ADEISCHADAI	QadEIZadaI	EIZ	ENG
2271	ATAWRADEU	QatawRadOY	wR	ENG
2272	ATEIÄTTADAU	QatEIEtadaU	EIE	ENG
2273	ATAFEITEU	QatafEItoY	fEI	ENG
2274	THADISADAI	TadizadaI	*T	ENG
2275	ADEUTHADAI	QadOYtadaI	OYT	ENG
2276	ATAJTHADAI	QatajTadaI	jT	ENG
2277	ADÄHTHADAI	QadE:DadaI	E:D	ENG
2278	ATAJRADEU	Qatajra:daU	jr	ENG
2279	ATATZTHADAI	QatatsDadaI	tsD	ENG
2280	ATTEOUTADEU	Qat@ @UtadOY	@ @U	ENG
2281	APAKTHADAI	QapakTadaI	kT	ENG
2282	ADÖHTHADAI	Qad2:DadaI	2:D	ENG
2283	ATOUETADEU	Qat@U@tadOY	@U@	ENG
2284	ATARWADAI	QatarvadaI	rv	ENG
2285	ATATZWADAI	QatatswadaI	tsw	ENG
2286	ATEIITTADAU	QatEIItadaU	EII	ENG
2287	ATIRRADEU	QatIradOY	Ir	ENG

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
2288	ATALLETADEU	QataL@tadOY	L@	ENG
2289	ATAPRADEU	Qatapra:daU	pr	ENG
2290	ATATHEUTADEU	QataTOYtadOY	TOY	ENG
2291	ATTERWADAI	Qat6wadaI	6w	ENG
2292	ADOTHADAI	QadOTadaI	OT	ENG
2293	ATATHRADEU	QataTradOY	Tr	ENG/ENG
2294	ATASTHADAI	QatazDadaI	zD	ENG
2295	ATAROUTEU	Qatar@UtOY	r@U	ENG/ENG
2296	ATATHTHADAI	QataDTadaI	DT	ENG/ENG
2297	ATATHBADAI	QataDbadaI	Db	ENG
2298	ATAGWADAI	QatagwadaI	gw	ENG
2299	ATALÜTTADAU	QataLYtadaU	LY	ENG
2300	DATOUÜHTADEU	dat@Uy:tadOY	@Uy:	ENG
2301	DATOUÄHTADEU	dat@UE:tadOY	@UE:	ENG
2302	ADIETHADAI	Qadi:DadaI	i:D	ENG
2303	PATALKADAU	pataLkadaU	Lk	ENG
2304	DATALIEHTADEU	dataLi:tadOY	Li:	ENG
2305	ATALPADAI	QataLpadaI	Lp	ENG
2306	DATATHÄHTADEU	dataDE:tadOY	DE:	ENG
2307	ADOHWADAI	Qado:wadaI	o:w	ENG
2308	ATALTADAI	QataLtadaI	Lt	ENG
2309	ATATHTADAI	QataTtadaI	Tt	ENG
2310	ADAHTHADAI	Qada:DadaI	a:D	ENG
2311	ADEISADAI	QadEIsadaI	EIs	ENG
2312	ATAFTHADAI	QatafDadaI	fD	ENG
2313	ATARWADAI	QataRwadaI	Rw	ENG
2314	ADEICHADAI	QadEICadaI	EIC	ENG
2315	APAKEITEU	QapakEItoY	kEI	ENG
2316	ATARRERTADEU	Qatar6tadOY	r6	ENG
2317	ATAWATTADAU	QatawatadaU	wa	ENG
2318	APAKRADEU	Qapakra:daU	kr	ENG

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
2319	ATAFRADEU	Qatafra:dOY	fr	ENG
2320	DATARÄHTADEU	da:tarE:tadOY	rE:	ENG
2321	ATALLADEU	QataLadOY	aL	ENG
2322	PATOUFADAU	pat@UpfadaU	@Upf	ENG
2323	ATATHÖTTADAU	QataT9tadaU	T9	ENG
2324	ATALSADAI	QataLzadaI	Lz	ENG
2325	ATARATTADAU	QataratadaU	ra	ENG
2326	ATASCHEITADEU	QataZEItadOY	ZEI	ENG
2327	ATEIUTTADAU	QatEIUtadaU	EIU	ENG
2328	ADÜHWADAI	Qady:wadaI	y:w	ENG
2329	DATAWEHTADEU	datawe:tadOY	we:	ENG
2330	DATATHÄHTADEU	dataTE:tadOY	TE:	ENG
2331	ADÖWWADAI	Qad9wadaI	9w	ENG
2332	ATATHAITADEU	QataTaltadOY	TaI	ENG
2333	ATARWADAI	QatarwadaI	rw	ENG/ENG
2334	ADOUSCHADAI	Qad@UZadaI	@UZ	ENG
2335	ATAFWADAI	QatafwadaI	fw	ENG
2336	ATATHOTTADAU	QataDOtadaU	DO	ENG
2337	ATATHÜTTADAU	QataDYtadaU	DY	ENG
2338	ATATHÖTTADAU	QataD9tadaU	D9	ENG
2339	EITATADAI	EItatadaI	*EI	ENG
2340	ATAWTADAI	QatawtadaI	wt	ENG
2341	ATATZRADEU	Qatatsra:daU	tsr	ENG
2342	PATALFADAU	pataLfadaU	Lf	ENG
2343	ATAWEITADEU	QatawEItadOY	wEI	ENG/ENG
2344	ADAITHADAI	QadaITadaI	aIT	ENG
2345	ATAWTHADAI	QatawTadaI	wT	ENG/ENG
2346	ATATHEITADEU	QataDEItadOY	DEI	ENG/ENG
2347	ADAUWADAI	QadaUwadaI	aUw	ENG
2348	ATADEITEU	QataDEItOY	dEI	ENG
2349	ATTEWADAI	Qat@wadaI	@w	ENG

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
2350	ATAJOUTADEU	Qataj@UtadOY	j@U	ENG
2351	ADEIBADAI	QadEIbadaI	EIb	ENG
2352	ATAULADEU	QataULadOY	aUL	ENG
2353	PATEIFADAU	patElfadaU	Elf	ENG
2354	DATEIÄHTADEU	datEIE:tadOY	EIE:	ENG
2355	ATTECHOUTEU	QatEC@UtOY	C@U	ENG
2356	ATARLADEU	QataRLadOY	RL	ENG
2357	ATOURLADEU	Qat@URadOY	@UR	ENG
2358	ATAWEUTADEU	QatawOYtadOY	wOY	ENG
2359	ATABWADAI	QatabwadaI	bw	ENG
2360	ADEIOUTADAI	QadEI@UtadaI	EI@U	ENG/ENG
2361	ATALCHADEU	QataLxadOY	Lx	ENG
2362	ATARTHADAI	QataRTadaI	RT	ENG
2363	PATOUGADAU	pat@UgadaU	@Ug	ENG
2364	ATTECHTHADAI	QatECDadaI	CD	ENG
2365	DATOUEHTEU	dat@Ue:tadOY	@Ue:	ENG
2366	ATARRADEU	Qatara:daU	ar	ENG
2367	ATATHMADEU	QataDmadOY	Dm	ENG
2368	ATEINGADEU	QatEINadOY	EIN	ENG
2369	ATALTHDADAI	QataLDdadaI	LD	ENG/ENG
2370	ADUHWADAI	Qadu:wadaI	u:w	ENG
2371	ATATHJADEU	QataTjadOY	Tj	ENG
2372	ATATHERTAEU	QataD6tadOY	D6	ENG
2373	ADOUTADAI	Qad@UtadaI	@Ut	ENG
2374	ATASCHTHADAI	QataZDadaI	ZD	ENG
2375	ATALPFADAU	QataLpfadaU	Lpf	ENG
2376	ATATHNADEU	QataTnadOY	Tn	ENG
2377	ATALRADEU	QataLRadOY	LR	ENG
2378	ATALJADEU	QataLjadOY	Lj	ENG
2379	ATANGLADEU	QataNLadOY	NL	ENG
2380	ATATZLADEU	QatatsLadOY	tsL	ENG

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
2381	ADELCHADEU	Qad@LCadOY	LC	ENG
2382	ATALOUTADEU	QataL@UtadOY	L@U	ENG/ENG
2383	ATAWSCHADAI	QatawZadaI	wZ	ENG
2384	DATALAHTADEU	dataLa:tadOY	La:	ENG
2385	ADEWCHADAI	Qad@wCadaI	wC	ENG
2386	APAKLADEU	QapakLadOY	kL	ENG
2387	ATASEITEU	QatazEltoY	zEI	ENG
2388	ATASWADAI	QatazwadaI	zw	ENG
2389	ATANRADEU	Qatanra:daU	nr	ENG
2390	ATAGRADEU	Qata:gra:daU	gr	ENG
2391	ADETHCHADAI	Qad@TCadaI	TC	ENG
2392	PATATHPFADAU	pataTpfadaU	Tpf	ENG
2393	ATAWWETADEU	Qataw@tadOY	w@	ENG
2394	ATAWOUTADEU	Qatav@UtadOY	v@U	ENG
2395	ATULLADEU	QatULadOY	UL	ENG
2396	ADOTHADAI	QadODadaI	OD	ENG
2397	ADEDCHADAI	Qad@DCadaI	DC	ENG
2398	ATATSCHLADEU	QatatSLadOY	tSL	ENG
2399	ATÄRRADEU	QatEra:daU	Er	ENG
2400	ADÜTHADAI	QadYDadaI	YD	ENG
2401	DATAWOHTADEU	datawo:tadOY	wo:	ENG
2402	ATALTSADAU	QataLtsadaU	Lts	ENG
2403	ATUHLADEU	Qatu:LadOY	u:L	ENG
2404	ADOUEITADEU	Qad@UEItadOY	@UEI	ENG/ENG
2405	ATATHAUTADEU	QataDaUtadOY	DaU	ENG
2406	PATAWKADAU	patawkadaU	wk	ENG
2407	ADATHADAI	QadaTadaI	aT	ENG
2408	ATATHETADEU	QataT@tadOY	T@	ENG
2409	ADOUSADAI	Qad@UzadaI	@Uz	ENG
2410	ATASCHLADEU	QataZLadOY	ZL	ENG
2411	ADÖTHADAI	Qad9DadaI	9D	ENG

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
2412	ATAPFOUTEU	Qatapf@UtOY	pf@U	ENG
2413	ATANTHADAI	QatanTadaI	nT	ENG
2414	ADUHTHADEI	Qadu:TadaI	u:T	ENG
2415	ATATHSCHADAI	QataDSadaI	DS	ENG
2416	ATEIRADEU	QatEIRadOY	EIR	ENG
2417	ATATHITTADAU	QataDItadaU	DI	ENG
2418	ATAPLADEU	QatapLadOY	pL	ENG
2419	ATOHLADEU	Qato:LadOY	o:L	ENG
2420	ATATHHADEU	QataDhadOY	Dh	ENG
2421	ATATHLADEU	QataTLadOY	TL	ENG/ENG
2422	ATASCHRADEU	QataZradOY	Zr	ENG
2423	ADISSADATH	QadIsadaD	D*	ENG
2424	ATÄHLADEU	QatE:LadOY	E:L	ENG
2425	ATÜLLADEU	QatYLadOY	YL	ENG
2426	ATATHAUTADEU	QataTaUtadOY	TaU	ENG
2427	DATOUOHTADEU	dat@Uo:tadOY	@Uo:	ENG
2428	ATÄHRADEU	QatE:ra:daU	E:r	ENG
2429	DATALUHTADEU	dataLu:tadOY	Lu:	ENG
2430	ADOOUTHADAI	Qad@UDadaI	@UD	ENG/ENG
2431	DATATHÜHTADEU	dataDy:tadOY	Dy:	ENG
2432	ATÖHRADEU	Qat2:ra:daU	2:r	ENG
2433	RADISADAI	ra:dizadaI	*r	ENG
2434	ATEULADEU	QatOYLadOY	OYL	ENG
2435	ATATHRADEU	QataDradOY	Dr	ENG/ENG
2436	ADÜWWADAI	QadYwadaI	Yw	ENG
2437	ATAWWADAI	QatawvadaI	wv	ENG
2438	ATTELADEU	Qat@LadOY	@L	ENG
2439	ATAWBADAI	QatawbadaI	wb	ENG
2440	ATAWÖTTADAU	Qataw9tadaU	w9	ENG
2441	ATATHAITADEU	QataDaItadOY	DaI	ENG
2442	ATÜHLADEU	Qaty:LadOY	y:L	ENG

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
2443	ATATHLADEU	QataDLadOY	DL	ENG/ENG
2444	DATEIEHTADEU	datEle:tadOY	Ele:	ENG
2445	ADUTHADAI	QadUTadaI	UT	ENG
2446	ADEIPADAI	QadElpadaI	Elp	ENG
2447	ATATHTHADAI	QataTDadaI	TD	ENG/ENG
2448	ATATOUTADEU	Qatat@UtadOY	t@U	ENG
2449	ATATHETADEU	QataD@tadOY	D@	ENG
2450	ATALÄTTADAU	QataLEtadaU	LE	ENG
2451	ATAWNGADEU	QatawNadOY	wN	ENG
2452	ATARJADEU	QatarjadOY	rj	ENG
2453	ATARBADAI	QatarbadaI	rb	ENG
2454	ATASCHRADEU	QataSra:daU	Sr	ENG
2455	ADEITHADAI	QadEIDadaI	EID	ENG/ENG
2456	DATEIUHTADEU	datElu:tadOY	Elu:	ENG
2457	ATATSCHTHADAI	QatatSTadaI	tST	ENG
2458	PATATHPFADAU	pataDpfadaU	Dpf	ENG
2459	PATALGADAU	pataLgadaU	Lg	ENG
2460	ADEIWADAU	QadElvadaU	Elv	ENG
2461	ATAILADEU	QataILadOY	aIL	ENG
2462	ATARUTTADAU	QatarUtadaU	rU	ENG
2463	ATASCHTHADAI	QataSTadaI	ST	ENG
2464	LADISADAI	LadizadaI	*L	ENG
2465	ATATHSADAI	QataTzadaI	Tz	ENG
2466	ATARNADEU	QatarnadOY	rn	ENG
2467	ATASCHTHADAI	QataZTadaI	ZT	ENG
2468	ATAGOUTEU	Qatag@UtOY	g@U	ENG
2469	ATEIÜTTADAU	QatEIYtadaU	EIY	ENG
2470	DATARÄTAEU	datara~tadOY	ra~	ENG/FR
2471	ATÖUTTADAU	Qato~UtadaU	o~U	FR
2472	DATAPFÖTAEU	datapfo~tadOY	pfo~	FR
2473	DATOUÄTAEU	dat@Ua~tadOY	@Ua~	ENG/FR

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
2474	DATÄHËTADEU	datE:E~tadOY	E:E~	FR
2475	ATÕHADEU	Qato~hadOY	o~h	FR
2476	DATËIEHTADEU	datE~i:tadOY	E~i:	FR
2477	ADÕWADAI	Qado~vadaI	o~v	FR
2478	DATALËTADEU	dataLE~tadOY	LE~	ENG/FR
2479	ATÕLADEU	Qato~ladOY	o~l	FR
2480	DATAHÃTADEU	data:a~tadOY	a:a~	FR
2481	ATÃÜTTADAU	Qata~YtadaU	a~Y	FR
2482	DATAIÃTADEU	dataIa~tadOY	aIa~	FR
2483	ATA ÕTADEU	QataQo~tadOY	Qo~	FR
2484	DATALÕTADEU	dataLo~tadOY	Lo~	ENG/FR
2485	ATÕÜTTADAU	Qato~YtadaU	o~Y	FR
2486	ATÕÖTTADAU	Qato~9tadaU	o~9	FR
2487	DATÄHÃTADEU	datE:a~tadOY	E:a~	FR
2488	ADËCHADEU	QadE~CadOY	E~C	FR
2489	DATAWÃTADEU	datava~tadOY	va~	FR
2490	DATAIËTADEU	dataIE~tadOY	aIE~	FR
2491	DATÄËTADEU	datEE~tadOY	EE~	FR
2492	DATIÃTADEU	datIa~tadOY	Ia~	FR
2493	ATÃHADEU	Qata~hadOY	a~h	FR
2494	ADÕTHADAI	Qado~DadaI	o~D	FR/ENG
2495	DATÃÖHTADEU	data~2:tadOY	a~2:	FR
2496	ATÃRADEU	Qata~RadOY	a~R	FR
2497	DATËÖHTADEU	datE~2:tadOY	E~2:	FR
2498	ATËJADEU	QatE~jadOY	E~j	FR
2499	DATAMÃTADEU	datama~tadOY	ma~	FR
2500	ATA ËTADEU	QataQE~tadOY	QE~	FR
2501	PATÕFADAU	pato~fadaU	o~f	FR
2502	DATÕËTADEU	dato~E~tadOY	o~E~	FR/FR
2503	ATÃNADEU	Qata~nadOY	a~n	FR
2504	DATABËTADEU	databE~tadOY	bE~	FR

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
2505	DATÕUHTADEU	dato~u:tadOY	o~u:	FR
2506	DATATHÃTADEU	dataTa~tadOY	Ta~	ENG/FR
2507	DATÖHËTADEU	dat2:E~tadOY	2:E~	FR
2508	ATÃERDADEU	Qata~6dadOY	a~6	FR
2509	ATÃAJADEU	Qata~jadOY	a~j	FR
2510	ADÕWADAI	Qado~wadaI	o~w	FR/ENG
2511	ATËHADEU	QatE~hadOY	E~h	FR
2512	DATËÕTADEU	datE~o~tadOY	E~o~	FR/FR
2513	DATÃÄHTADEU	data~E:tadOY	a~E:	FR
2514	DATÕÃTADEU	dato~a~tadOY	o~a~	FR/FR
2515	DATTERÕTADEU	dat6o~tadOY	6o~	FR
2516	DATÃÄTADEU	datEa~tadOY	Ea~	FR
2517	DATATSCHÃTADEU	datatSa~tadOY	tSa~	FR
2518	ADÃSADAI	Qada~sadaI	a~s	FR
2519	DATAPËTADEU	datapE~tadOY	pE~	FR
2520	ADÕPADAI	Qado~padaI	o~p	FR
2521	DATEUËTADEU	datOYE~tadOY	OYE~	FR
2522	DATUHËTADEU	datu:E~tadOY	u:E~	FR
2523	DATÛÕTADEU	datYo~tadOY	Yo~	FR
2524	DATAFÕTADEU	datafo~tadOY	fo~	FR
2525	ATËOTTADAU	QatE~OtadaU	E~O	FR
2526	ADÕBADAI	Qado~badaI	o~b	FR
2527	DATÛHÃTADEU	daty:a~tadOY	y:a~	FR
2528	ATÃNGADEU	Qata~NadOY	a~N	FR
2529	ATÃATTADAU	Qata~atadaU	a~a	FR
2530	DATARÃTADEU	dataRa~tadOY	Ra~	FR
2531	ADËTZADAI	QadE~tsadaI	E~ts	FR
2532	ATÃRADEU	Qata~radOY	a~r	FR/ENG
2533	DATATËTADEU	datatE~tadOY	tE~	FR
2534	DATADÕTATEU	dataDo~tadOY	Do~	ENG/FR
2535	ADÃTSCHADAI	Qada~tSadaI	a~tS	FR

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
2536	DATEUĂTAEU	datOYa~tadOY	OYa~	FR
2537	DATAWËTAEU	datawE~tadOY	wE~	ENG/FR
2538	DATIEĂTAEU	dati:a~tadOY	i:a~	FR
2539	DATAHÛTAEU	data:o~tadOY	a:o~	FR
2540	DATUHĂTAEU	datu:a~tadOY	u:a~	FR
2541	ADËSCHADAI	QadE~ZadaI	E~Z	FR
2542	DATÛEHTAEU	dato~e:tadOY	o~e:	FR
2543	ADËDADAI	QadE~dadaI	E~d	FR
2544	ATËATTADAU	QatE~atadaU	E~a	FR
2545	DATAHËTAEU	datahE~tadOY	hE~	FR
2546	ATÛMADEU	Qato~madOY	o~m	FR
2547	DATOËTAEU	datOE~tadOY	OE~	FR
2548	DATÛHËTAEU	daty:E~tadOY	y:E~	FR
2549	DATAJÛTAEU	datajo~tadOY	jo~	FR
2550	DATËAHTAEU	datE~a:tadOY	E~a:	FR
2551	DATËEHTADAU	datE~e:tadaU	E~e:	FR
2552	ATĂÛTTADAU	Qata~9tadaU	a~9	FR
2553	DATAWÛTAEU	datawo~tadOY	wo~	ENG/FR
2554	DATËĂTAEU	datE~a~tadOY	E~a~	FR/FR
2555	DATOUÛTAEU	dat@Uo~tadOY	@Uo~	ENG/FR
2556	DATAGÛTAEU	datago~tadOY	go~	FR
2557	ATËNADEU	QatE~nadOY	E~n	FR
2558	PATËGADAU	patE~gadaU	E~g	FR
2559	DATTERËTAEU	dat6E~tadOY	6E~	FR
2560	ATÛEITAEU	Qato~EItadOY	o~EI	FR/ENG
2561	DATAÛTAEU	datao~tadOY	ao~	FR
2562	DATIÛTAEU	datIo~tadOY	Io~	FR
2563	ADĂTHADAI	Qada~DadaI	a~D	FR/ENG
2564	DATATZĂTAEU	datatsa~tadOY	tsa~	FR
2565	PATÛGADAU	pato~gadaU	o~g	FR
2566	ADĂDADAI	Qada~dadaI	a~d	FR

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
2567	ADÕSADAI	Qado~zadAI	o~z	FR
2568	DATASCHËTAEDEU	dataSE~tadOY	SE~	FR
2569	DATASCHÕTAEDEU	dataZo~tadOY	Zo~	FR
2570	DATËOHTAEDEU	datE~o:tadOY	E~o:	FR
2571	ADËBADAI	QadE~badAI	E~b	FR
2572	ATËITTADAU	QatE~ItadaU	E~I	FR
2573	DATASÃTAEDEU	dataza~tadOY	za~	FR
2574	DATANGÕTAEDEU	dataNo~tadOY	No~	FR
2575	DATEHÃTAEDEU	date:a~tadOY	e:a~	FR
2576	ATAFRADEU	Qatafra:d@U	fr	ENG
2577	DATAWËTAEDEU	datavE~tadOY	vE~	FR
2578	ADISSADÃ	QadIsada~	a~*	FR
2579	ADÃ ADAI	Qada~QadAI	a~Q	FR
2580	DATEIÃTAEDEU	datEIa~tadOY	EIa~	ENG/FR
2581	DATARÕTAEDEU	dataRo~tadOY	Ro~	FR
2582	DATAMËTAEDEU	datamE~tadOY	mE~	FR
2583	ATËEDADEU	QatE~@dadOY	E~@	FR
2584	DATAUËTAEDEU	dataUE~tadOY	aUE~	FR
2585	ATËRADEU	QatE~radOY	E~r	FR/ENG
2586	DATAKÃTAEDEU	dataka~tadOY	ka~	FR
2587	DATALËTAEDEU	datalE~tadOY	IE~	FR
2588	DATEUÕTAEDEU	datOYo~tadOY	OYo~	FR
2589	DATAGÃTAEDEU	dataga~tadOY	ga~	FR
2590	ATÕNADEU	Qato~nadOY	o~n	FR
2591	DATANËTAEDEU	datanE~tadOY	nE~	FR
2592	DATÖHÕTAEDEU	dat2:o~tadOY	2:o~	FR
2593	DATAMÕTAEDEU	datamo~tadOY	mo~	FR
2594	PATÃKADAU	pata~kadaU	a~k	FR
2595	ATÃOTTADAU	Qata~OtadaU	a~O	FR
2596	DATEHÕTAEDEU	date:o~tadOY	e:o~	FR
2597	DATÖÃTAEDEU	dat9a~tadOY	9a~	FR

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
2598	ATÕRADEU	Qato~RadOY	o~R	FR
2599	ADËTHADAI	QadE~DadaI	E~D	FR/ENG
2600	DATÖËTAEU	dat9E~tadOY	9E~	FR
2601	ADÕTADAI	Qado~tadaI	o~t	FR
2602	DATÄÕTAEU	datEo~tadOY	Eo~	FR
2603	DATAUÃTAEU	dataUa~tadOY	aUa~	FR
2604	ADÃWADAI	Qada~vadaI	a~v	FR
2605	DATIEËTAEU	dati:E~tadOY	i:E~	FR
2606	DATAGËTAEU	datagE~tadOY	gE~	FR
2607	DATASCHËTAEU	dataZE~tadOY	ZE~	FR
2608	ADÃSCHADAI	Qada~SadaI	a~S	FR
2609	DATAFËTAEU	datafE~tadOY	fE~	FR
2610	DATASËTAEU	datazE~tadOY	zE~	FR
2611	ADËTADAI	QadE~tadaI	E~t	FR
2612	ADËTHADAI	QadE~TadaI	E~T	FR/ENG
2613	ADËWADAI	QadE~vadaI	E~v	FR
2614	ATËNGAEU	QatE~NadOY	E~N	FR
2615	DATTEÃTAEU	dat@a~tadOY	@a~	FR
2616	ATÕITTADAU	Qato~ItadaU	o~I	FR
2617	DATANGËTAEU	dataNE~tadOY	NE~	FR
2618	DATAUÕTAEU	dataUo~tadOY	aUo~	FR
2619	DATAPÕTAEU	datapo~tadOY	po~	FR
2620	ÕDATAEU	o~datadOY	*o~	FR
2621	DATACHÃTAEU	dataxa~tadOY	xa~	FR
2622	DATÛÃTAEU	datYa~tadOY	Ya~	FR
2623	DATÕIEHTAEU	dato~i:tadOY	o~i:	FR
2624	DATARËTAEU	datarE~tadOY	rE~	ENG/FR
2625	PATËPFADAU	patE~pfadaU	E~pf	FR
2626	ATËLADEU	QatE~ladOY	E~l	FR
2627	DATAKËTAEU	datakE~tadOY	kE~	FR
2628	ATÃEDADEU	Qata~@dadOY	a~@	FR

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
2629	DATALÖTAEU	datalo~tadOY	lo~	FR
2630	PATÖKADAU	pato~kadaU	o~k	FR
2631	DATAWÄTAEU	datawa~tadOY	wa~	ENG/FR
2632	ADËPADAI	QadE~padaI	E~p	FR
2633	DATTEÖTAEU	dat@o~tadOY	@o~	FR
2634	DATAJÄTAEU	dataja~tadOY	ja~	FR
2635	ADËSADAI	QadE~sadaI	E~s	FR
2636	ATËUTTADAU	QatE~UtadaU	E~U	FR
2637	DATOHÖTAEU	dato:o~tadOY	o:o~	FR
2638	DATÄOHTAEU	data~o:tadOY	a~o:	FR
2639	PATÖPFADAU	pato~pfadaU	o~pf	FR
2640	ATËERDAEU	QatE~6dadOY	E~6	FR
2641	DATOHÄTAEU	dato:a~tadOY	o:a~	FR
2642	ËDATAEU	E~datadOY	*E~	FR
2643	DATATHÖTAEU	dataTo~tadOY	To~	ENG/FR
2644	ADËTSCHADAI	QadE~tSadaI	E~tS	FR
2645	ATÖATTADAU	Qato~atadaU	o~a	FR
2646	ATÖCHAEU	Qato~xadOY	o~x	FR
2647	ADÖDADAI	Qado~dadaI	o~d	FR
2648	ADÄSCHADAI	Qada~ZadaI	a~Z	FR
2649	DATÄEHTAEU	data~e:tadOY	a~e:	FR
2650	ADÄPADAI	Qada~padaI	a~p	FR
2651	ADÖSCHADAI	Qado~SadaI	o~S	FR
2652	ADÄTADAI	Qada~tadaI	a~t	FR
2653	ATÄÄTTADAU	Qata~EtadaU	a~E	FR
2654	DATTERÄTAEU	dat6a~tadOY	6a~	FR
2655	ADË ADAI	QadE~QadaI	E~Q	FR
2656	DATÄÖTAEU	data~o~tadOY	a~o~	FR/FR
2657	DATÄHÖTAEU	datE:o~tadOY	E:o~	FR
2658	DATANÄTAEU	datana~tadOY	na~	FR
2659	DATOUËTAEU	dat@UE~tadOY	@UE~	ENG/FR

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
2660	ATËRADEU	QatE~RadOY	E~R	FR
2661	PATËKADAU	patE~kadaU	E~k	FR
2662	ADÃWADAI	Qada~wadaI	a~w	FR/ENG
2663	DATÕÄHTADEU	dato~E:tadOY	o~E:	FR
2664	DATIËTADEU	datIE~tadOY	IE~	FR
2665	DATËEHTADAU	datE~E:tadaU	E~E:	FR
2666	DATOHËTADEU	dato:E~tadOY	o:E~	FR
2667	DATAPFÃTADEU	datapfa~tadOY	pfa~	FR
2668	ADÕTHADAI	Qado~TadaI	o~T	FR/ENG
2669	ATAPFRADEU	QatapfRadOY	pfR	
2670	ADÃTHADAI	Qada~TadaI	a~T	FR/ENG
2671	ÃDATADEU	a~datadOY	*a~	FR
2672	DATUÃTADEU	datUa~tadOY	Ua~	FR
2673	DATATHËTADEU	dataDE~tadOY	DE~	ENG/FR
2674	DATATSCHËTADEU	datatSE~tadOY	tSE~	FR
2675	DATIEÕTADEU	dati:o~tadOY	i:o~	FR
2676	ATÃITTADAU	Qata~ItadaU	a~I	FR
2677	DATAWÕTADEU	datavo~tadOY	vo~	FR
2678	ADÃBADAI	Qada~badaI	a~b	FR
2679	DATAHÕTADEU	dataho~tadOY	ho~	FR
2680	DATÕOHTADEU	dato~o:tadOY	o~o:	FR
2681	DATTEËTADEU	dat@E~tadOY	@E~	FR
2682	DATEIËTADEU	datEIE~tadOY	EIE~	ENG/FR
2683	DATÕAHTADEU	dato~a:tadOY	o~a:	FR
2684	DATUHÕTADEU	datu:o~tadOY	u:o~	FR
2685	DATASCHÕTADEU	dataSo~tadOY	So~	FR
2686	DATABÕTADEU	databo~tadOY	bo~	FR
2687	DATACHËTADEU	dataxE~tadOY	xE~	FR
2688	ADÃEITADEU	Qada~EItadOY	a~EI	FR/ENG
2689	DATATHËTADEU	dataTE~tadOY	TE~	ENG/FR
2690	DATTECHÕTADEU	datECõ~tadOY	Co~	FR

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
2691	DATÄÜHTADEU	data~y:tadOY	a~y:	FR
2692	ADÖTZADAI	Qado~tsadaI	o~ts	FR
2693	DATASÄTADEU	datasa~tadOY	sa~	FR
2694	DATATZËTADEU	datatsE~tadOY	tsE~	FR
2695	DATADËTADEU	datadE~tadOY	dE~	FR
2696	DATUÖTADEU	datUo~tadOY	Uo~	FR
2697	ATÖETADEU	Qato~@tadOY	o~@	FR
2698	ATÖERTADEU	Qato~6tadOY	o~6	FR
2699	ADËSADAI	QadE~zadaI	E~z	FR
2700	DATAÄTADEU	dataa~tadOY	aa~	FR
2701	DATATSCHÖTADEU	datatSo~tadOY	tSo~	FR
2702	DATAACHÖTADEU	dataxo~tadOY	xo~	FR
2703	ADÄSADAI	Qada~zadaI	a~z	FR
2704	PATÄPFADAU	pata~pfadaU	a~pf	FR
2705	ATÖOTTADAU	dato~OtadOY	o~O	FR
2706	ATÖLAEU	Qato~LadOY	o~L	FR/ENG
2707	ADÖSADAI	Qado~sadaI	o~s	FR
2708	ADÖTSCHADAI	Qado~tSadaI	o~tS	FR
2709	ATA ÄTAEU	QataQa~tadOY	Qa~	FR
2710	DATÖHÄTAEU	dat2:a~tadOY	2:a~	FR
2711	DATËUHTADEU	datE~u:tadOY	E~u:	FR
2712	ADÄTZADAI	Qada~tsadaI	a~ts	FR
2713	ADISSADÖ	QadIsado~	o~*	FR
2714	DATÄIEHTADEU	data~i:tadOY	a~i:	FR
2715	ATÖÄTTADAU	Qato~EtadaU	o~E	FR
2716	DATÄUHTADEU	data~u:tadOY	a~u:	FR
2717	DATARÖTAEU	dataro~tadOY	ro~	ENG/FR
2718	DATTECHËTAEU	datECE~tadOY	CE~	FR
2719	ATËÄTTADAU	QatE~EtadaU	E~E	FR
2720	DATASCHÄTAEU	dataZa~tadOY	Za~	FR
2721	DATABÄTAEU	databa~tadOY	ba~	FR

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
2722	DATÜËTAEDEU	datYE~tadOY	YE~	FR
2723	DATAJËTAEDEU	datajE~tadOY	jE~	FR
2724	DATADÄTAEDEU	datada~tadOY	da~	FR
2725	DATATZÖTAEDEU	datatso~tadOY	tso~	FR
2726	DATAKÖTAEDEU	datako~tadOY	ko~	FR
2727	ATÖNGAEDEU	Qato~NadOY	o~N	FR
2728	PATÄFADAU	pata~fadaU	a~f	FR
2729	DATÄAHTAEDEU	data~a:tadOY	a~a:	FR
2730	DATANÖTAEDEU	datano~tadOY	no~	FR
2731	ATËÜTTADAU	QatE~YtadaU	E~Y	FR
2732	DATAHÄTAEDEU	dataha~tadOY	ha~	FR
2733	DATEIÖTAEDEU	datElo~tadOY	Elo~	ENG/FR
2734	DATASËTAEDEU	datasE~tadOY	sE~	FR
2735	DATATÄTAEDEU	datata~tadOY	ta~	FR
2736	ATËÖTTADAU	QatE~9tadaU	E~9	FR
2737	ATÖRADEU	Qato~radOY	o~r	FR/ENG
2738	ATÄMADEU	Qata~madOY	a~m	FR
2739	DATUËTAEDEU	datUE~tadOY	UE~	FR
2740	ADÖ ADAI	Qado~QadaI	o~Q	FR
2741	DATAIÖTAEDEU	dataIo~tadOY	aIo~	FR
2742	DATÄËTAEDEU	data~E~tadOY	a~E~	FR/FR
2743	DATAPFËTAEDEU	datapfE~tadOY	pfE~	FR
2744	DATALÄTAEDEU	dataLa~tadOY	La~	ENG/FR
2745	ATÖJAEDEU	Qato~jadOY	o~j	FR
2746	DATAFÄTAEDEU	datafa~tadOY	fa~	FR
2747	ATAPFRADEU	Qatapfra:daU	pfr	ENG
2748	DATASÖTAEDEU	datazo~tadOY	zo~	FR
2749	DATÜHÖTAEDEU	daty:o~tadOY	y:o~	FR
2750	DATADÖTAEDEU	datado~tadOY	do~	FR
2751	ADISSADË	QadIsadE~	E~*	FR
2752	PATÄGADAU	pata~gadaU	a~g	FR

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
2753	ATĂLADEU	Qata~ladOY	a~l	FR
2754	DATAËTADEU	dataE~tadOY	aE~	FR
2755	DATOÛTADEU	datOo~tadOY	Oo~	FR
2756	DATÛÖHTADEU	dato~2:tadOY	o~2:	FR
2757	DATÛÛHTADEU	dato~y:tadOY	o~y:	FR
2758	DATËÛHTADEU	datE~y:tadOY	E~y:	FR
2759	DATASCHĂTADEU	dataSa~tadOY	Sa~	FR
2760	PATËFADAU	patE~fadaU	E~f	FR
2761	ATËLADEU	QatE~LadOY	E~L	FR/ENG
2762	ADËSCHADAI	QadE~SadaI	E~S	FR
2763	ADĂOUTADEU	Qada~@UtadOY	a~@U	FR/ENG
2764	ATĂUTTADAU	Qata~UtadaU	a~U	FR
2765	DATATÛTADEU	datato~tadOY	to~	FR
2766	ATĂCHADEU	Qata~xadOY	a~x	FR
2767	ATËMADEU	QatE~madOY	E~m	FR
2768	DATASÛTADEU	dataso~tadOY	so~	FR
2769	ADËWADAI	QadE~wadaI	E~w	FR/ENG
2770	ATAFRADEU	QatafRadOY	fR	
2771	DATALĂTADEU	dataLa~tadOY	la~	FR
2772	ADÛSCHADAI	Qado~ZadaI	o~Z	FR
2773	DATOĂTADEU	datOa~tadOY	Oa~	FR
2774	DATAPĂTADEU	datapa~tadOY	pa~	FR
2775	ATÛOUTADEU	Qato~@UtadOY	o~@U	FR/ENG
2776	ATĂLADEU	Qata~LadOY	a~L	FR/ENG
2777	DATARËTADEU	dataRE~tadOY	RE~	FR
2778	DATEHËTADEU	date:E~tadOY	e:E~	FR
2779	DATÛÛTADEU	dat9o~tadOY	9o~	FR
2780	DATATHĂTADEU	dataDa~tadOY	Da~	ENG/FR
2781	DATANGĂTADEU	dataNa~tadOY	Na~	FR
2782	DATTECHĂTADEU	datECa~tadOY	Ca~	FR
2783	DATAHËTADEU	data:E~tadOY	a:E~	FR

<i>File-nr</i>	<i>logatome</i>	<i>SAM-PA</i>	<i>diphone</i>	<i>language</i>
2784	ATTERCHADEU	Qat6CadOY	6C	
2785	ATÖCHADEU	Qat9CadOY	9C	
2786	ATARCJADEI	QataRCadaI	RC	
2787	ATALCHADAI	QatalCadaI	IC	
2788	DATAUCHADEU	dataUCadOY	aUC	
2789	DATOHCHADAU	dato:CadaU	o:C	
2790	ATUCHADEU	Qatu:CadOY	u:C	
2791	PATAHCHADAU	pata:CadaU	a:C	
2792	PATATZTADAU	patatstadaU	tst	
2793	ATIEITTADAU	Qati:ItadaU	i:I	
2794	DATUHUTTADAU	datu:UtadaU	u:U	
2795	PATATZTZADAU	patatstsadaU	tsts	

13. Bibliography

[1]: <http://www.bas.uni-muenchen.de/Forschung/BITS>

[2]: <http://www.studiobox.de/english/index.html>

[3]: Chr. Draxler, K. Jänsch (2004): SpeechRecorder – a Universal Platform Independent Multi-Channel Audio Recording Software. In: Proc. of the IV. International Conference on Language Resources and Evaluation, Lisbon, Portugal, pp. 559-562.

[4]: <http://www.fon.hum.uva.nl/praat/>

[5]: MAUS Goes Iterative. Proc. of the IV. International Conference on Language Resources and Evaluation, Lisbon, Portugal, pp. 1015-1018.